





NOTES:

Current Rating: 2.0AMP
Contact Resistance: 20m Ω Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000M Ω Min
Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn over Ni
Insulator Material: PA9T+30%G.F UL94V-0

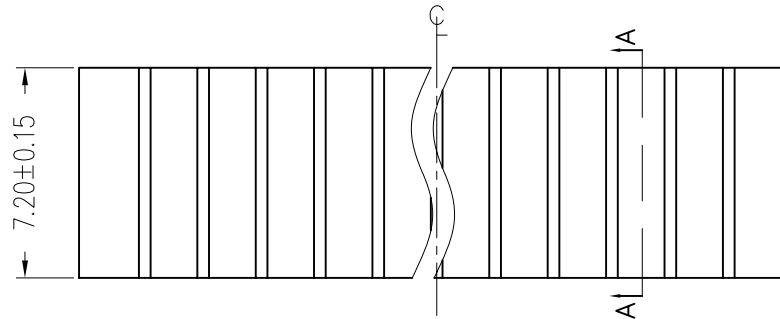

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

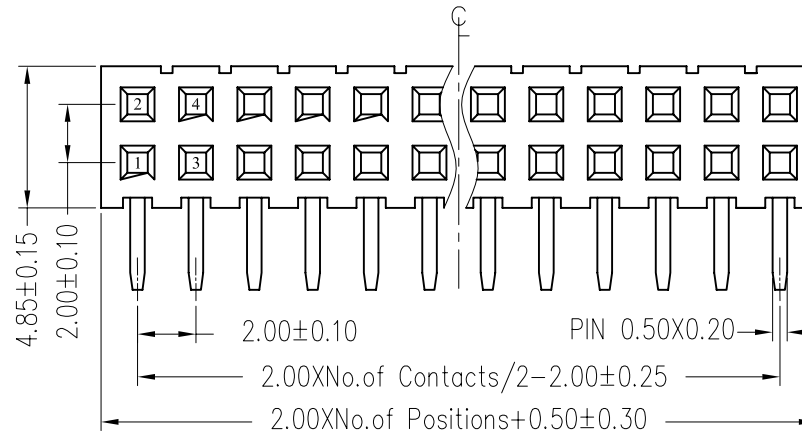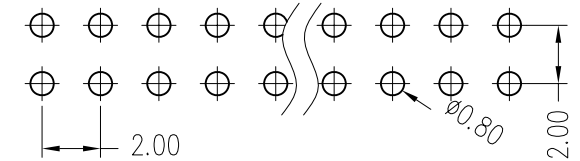

SECTION A-A

Ordering Information

MTF272-2XX RU1

No. of Pins per
ROW: 02-40PIN

X. $\pm$ 0.30	X. $^{\circ}$ $\pm$ 5 $^{\circ}$	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD.
.X $\pm$ 0.20	.X $^{\circ}$ $\pm$ 2 $^{\circ}$	MAT'L	PART NO.(INTENDED USE)	
.XX $\pm$ 0.10	.XX $^{\circ}$ $\pm$ 1 $^{\circ}$	FINISH	APPD: SUNNY	TITLE: FH2.0 DUAL 90 $^{\circ}$ H=7.2
.XXX $\pm$ 0.05	.XXX $^{\circ}$ $\pm$ 0.5 $^{\circ}$		CHKD: LISA	DWG NO.: MTF272-2XXRU1
FEMALE HEADER CONNECTOR		Q'TY	DR: ZOE 2006-11-28	SCALE 1/1
				SHEET 1/1
				REV. A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MINTRON](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)