



REV.	ECN. NO.	APPD.
A		

NOTES.
Rated Current:1.0AMP.
Contact Resistance:20m Ω Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000M Ω Min.
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

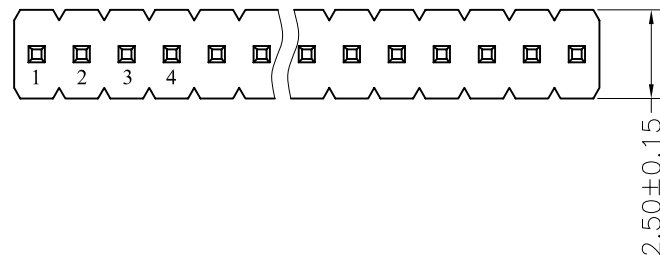



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

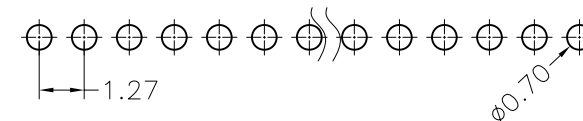

Ordering Information

MTP315-11XX S1

No.of Pins per
Row: 01~40

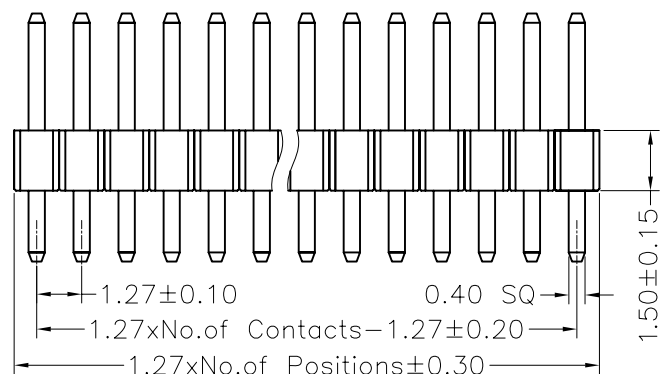

X. $\pm$ 0.30	X.° $\pm$ 5°	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD.		
.X $\pm$ 0.20	.X° $\pm$ 2°	MAT'L	PART NO.(INTENDED USE)			
.XX $\pm$ 0.10	.XX° $\pm$ 1°	FINISH	APPD: SUNNY	TITLE: PH1.27 SINGLE ROW 180° H=1.5		
.XXX $\pm$ 0.05	.XXX° $\pm$ 0.5°		CHKD: LISA			
PIN HEADER CONNECTOR		Q'TY	DR: ZOE 2006-11-28	DWG NO.: MTP315-11XXS1		
					SCALE 1/1	SHEET 1/1
						REV. A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [MINTRON](#) *manufacturer:*

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)