

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

[0449147402](#)

Status:


Active

Overview:

Micro-Fit Connector System

Description:

Micro-Fit CPI Header, Dual Row, Vertical, Compliant Pin Interface, 24 Circuits, LCP, Glass-Filled, UL 94V-0, 0.38µm Gold (Au) Selective Contact Plating, Tin (Sn) Plated Tails, Glow-Wire Capable

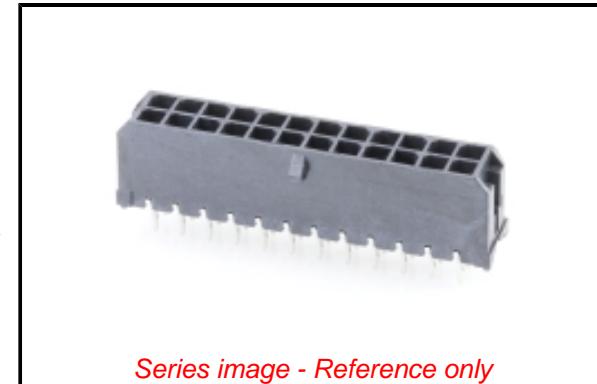

Series image - Reference only

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[3D Model \(PDF\)](#)

[Product Specification 430450001-PS-KO-000 \(PDF\)](#)

[Product Specification 430450001-PS-SP-000 \(PDF\)](#)

[Product Specification PS-43045-001 \(PDF\)](#)

[Packaging Specification PK-70873-0314-001 \(PDF\)](#)

[Test Summary TS-43045-001-001 \(PDF\)](#)

[Test Summary TS-43045-002-001 \(PDF\)](#)

[Test Summary TS-46235-001-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[Symbol Footprint Data SYM-44914-2401-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

UL

LR19980

E29179

Application tooling part link

Application Tooling Part Link

62203-0455

General

Product Family

Series

Application

Comments

PCB Headers

[44914](#)

Power, Wire-to-Board

""""""High Temperature|Square Pin<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. """"""

[Micro-Fit Connector System](#)

Micro-Fit CPI

822350766456

Overview

Product Name

UPC

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

Flammability

No

24

24

Black

30

94V-0

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

44914 Series

Mates With

[430252400](#) Micro-Fit 3.0 Receptacle Housing

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Removal Tool

Product #

622030455

Glow-Wire Capable	Yes
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.102/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +125°C
Termination Interface: Style	Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact	8.5A
Voltage - Maximum	600V

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-70873-0314-001
Product Specification	430450001-PS-KO-000, 430450001-PS-SP-000, PS-43045-001
Sales Drawing	SD-44914-002-001
Symbol/Footprint Data	SYM-44914-2401-001
Test Summary	TS-43045-001-001, TS-43045-002-001, TS-46235-001-001

This document was generated on 01/27/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Headers & Wire Housings category:

Click to view products by Molex manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)