

MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

L7805CD2T(MS)


Product specification

Three-terminal positive voltage regulator

FEATURES

- Maximum Output current I_{OM} : 1.5 A
- Output voltage V_o : 5V
- Continuous total dissipation
 P_D : 1.5 W ($T_a = 25^\circ\text{C}$)
15 W ($T_c = 25^\circ\text{C}$)

Reference News

PACKAGE OUTLINE	Marking
 1.IN 2.GND 3.OUT	

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Air	$R_{\theta JA}$	83.3	$^\circ\text{C/W}$
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.33	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_{OPR}	0~+150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

($V_i=10\text{V}$, $I_o=500\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)







Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	V_o		25 $^\circ\text{C}$	4.8	5.0	5.2	V
		7V $\leq V_i \leq 20\text{V}$, $I_o=5\text{mA}-1\text{A}$, $P \leq 15\text{W}$	0-125 $^\circ\text{C}$	4.75	5.00	5.25	V
Load Regulation	ΔV_o	$I_o=5\text{mA}-1.5\text{A}$	25 $^\circ\text{C}$		9	100	mV
		$I_o=250\text{mA}-750\text{mA}$	25 $^\circ\text{C}$		4	50	mV
Line regulation	ΔV_o	7V $\leq V_i \leq 25\text{V}$	25 $^\circ\text{C}$		4	100	mV
		8V $\leq V_i \leq 12\text{V}$	25 $^\circ\text{C}$		1.6	50	mV
Quiescent Current	I_q		25 $^\circ\text{C}$		5	8	mA
Quiescent Current Change	ΔI_q	7V $\leq V_i \leq 25\text{V}$	0-125 $^\circ\text{C}$		0.3	1.3	mA
		5mA $\leq I_o \leq 1\text{A}$	0-125 $^\circ\text{C}$		0.03	0.5	mA
Output Noise Voltage	V_N	10Hz $\leq f \leq 100\text{KHz}$	25 $^\circ\text{C}$		42		μV
Output voltage drift	$\Delta V_o / \Delta T$	$I_o=5\text{mA}$	0-125 $^\circ\text{C}$		-1.1		mV/ $^\circ\text{C}$
Ripple Rejection	RR	8V $\leq V_i \leq 18\text{V}$, $f=120\text{Hz}$	0-125 $^\circ\text{C}$	62	73		dB
Dropout Voltage	V_d	$I_o=1\text{A}$	25 $^\circ\text{C}$		2		V
Output resistance	R_o	$f=1\text{KHz}$	0-125 $^\circ\text{C}$		10		m Ω
Short Circuit Current	I_{sc}		25 $^\circ\text{C}$		230		mA
Peak Current	I_{pk}		25 $^\circ\text{C}$		2.2		A

TYPICAL APPLICATION

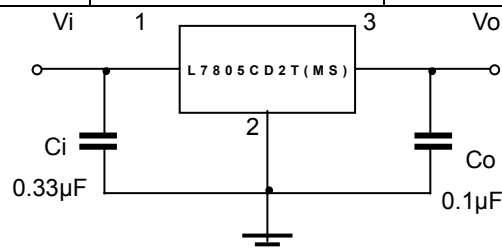


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

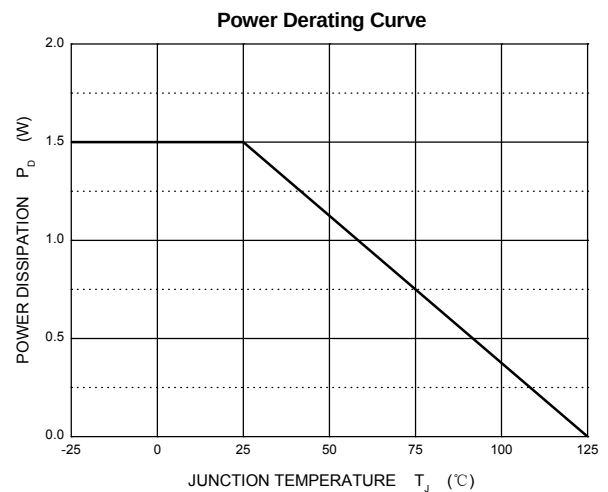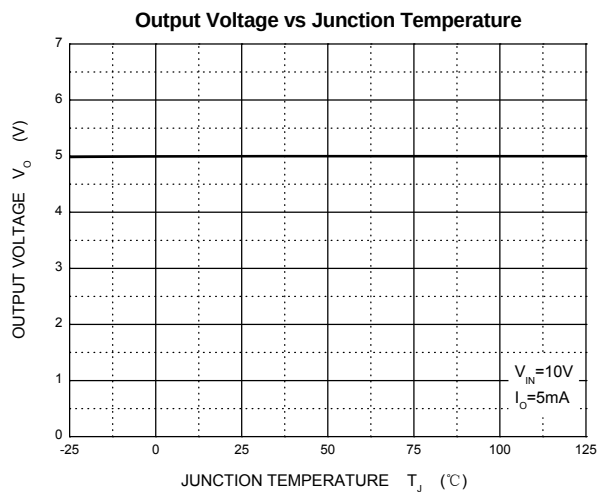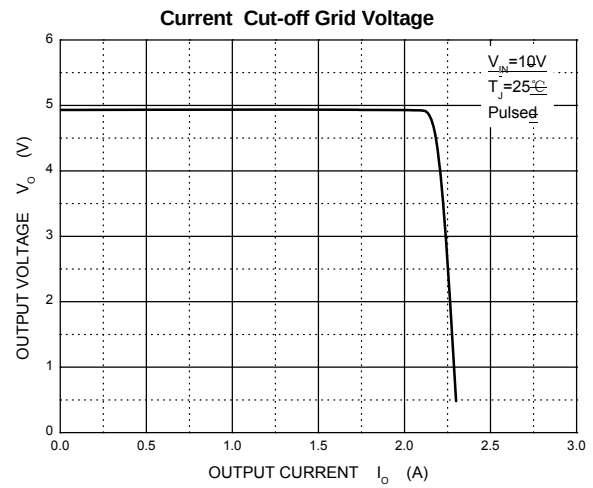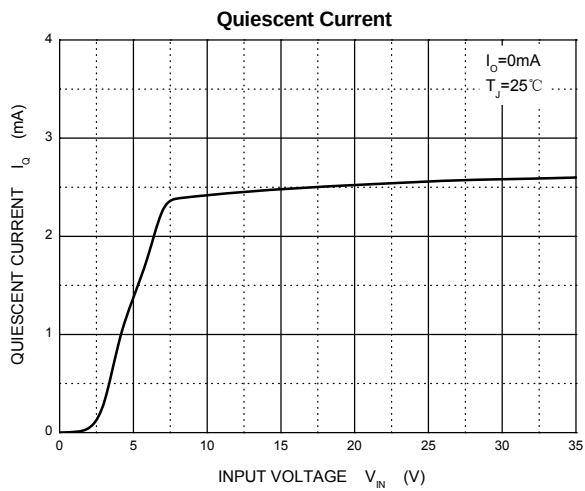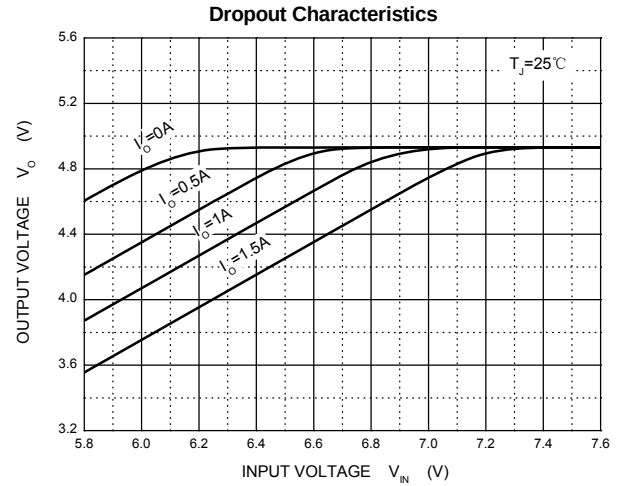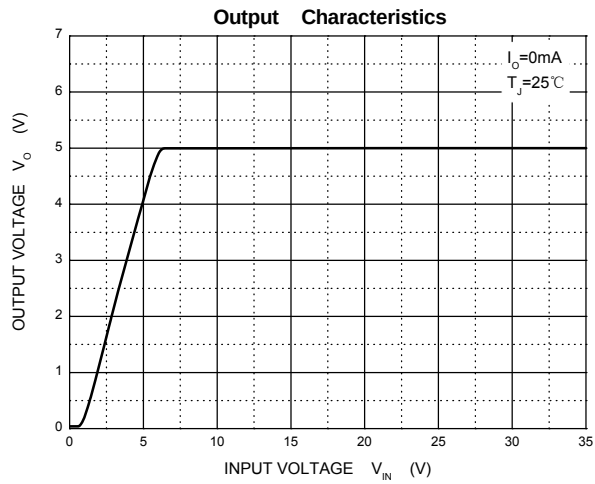

Package Outline Dimensions

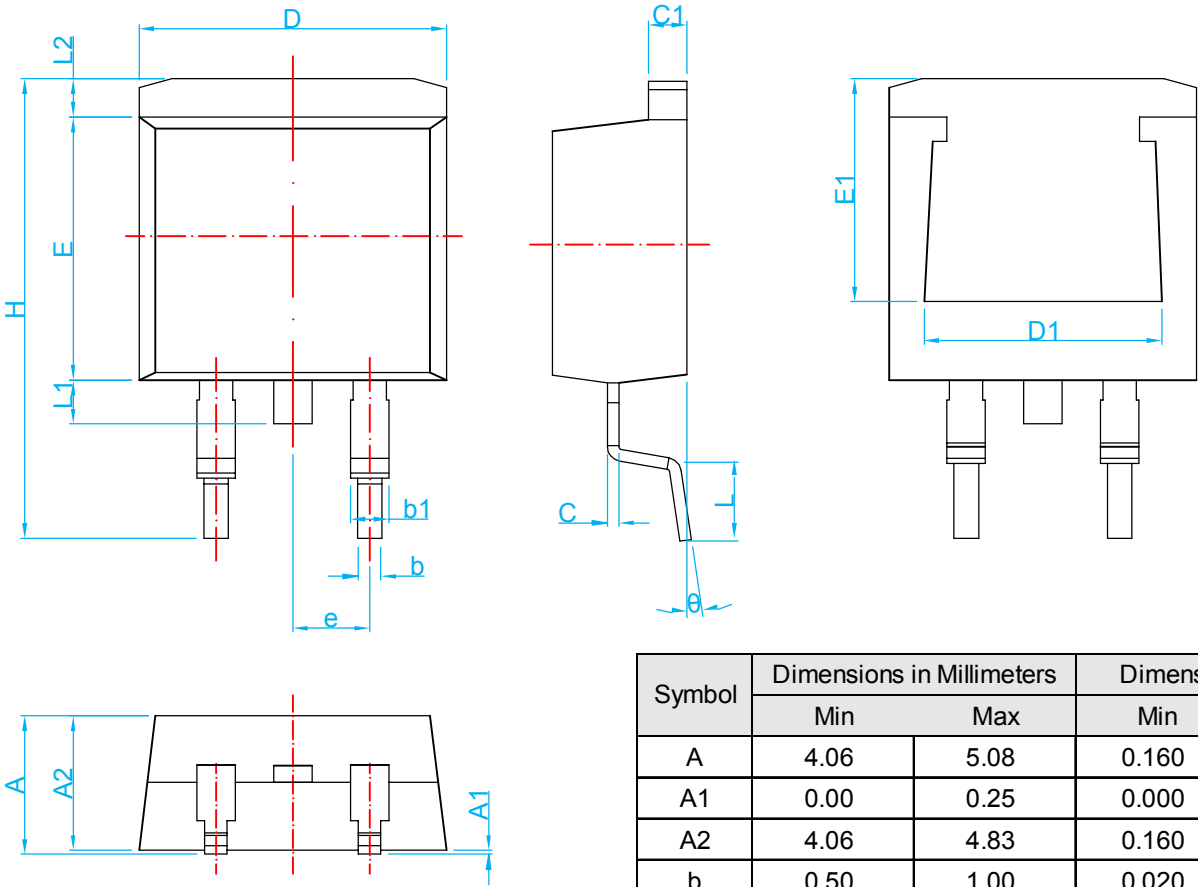

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	4.06	5.08	0.160	0.200
A1	0.00	0.25	0.000	0.010
A2	4.06	4.83	0.160	0.190
b	0.50	1.00	0.020	0.039
b1	1.14	1.78	0.045	0.070
C	0.33	0.74	0.013	0.029
C1	1.14	1.67	0.045	0.066
D	9.65	10.67	0.380	0.420
D1	6.23	---	0.245	---
E	8.38	9.66	0.330	0.380
E1	6.86	---	0.270	---
H	14.60	15.88	0.575	0.625
e	2.54 TYP		0.100 TYP	
L	1.78	2.84	0.070	0.112
L1	1.20	1.78	0.047	0.070
L2	1.17	1.68	0.046	0.066
θ	0°	8°	0°	8°

REEL SPECIFICATION

P/N	PKG	QTY
L7805CD2T(MS)	TO-263	1000

Attention

■ Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.

■ MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specification of any and all MSKSEMI Semiconductor products described or contained herein.

■ Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [MSKSEMI](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [LV56801P-E](#) [UA7805CKC](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#)
[NCV78M05ABDTRKG](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#)
[LV5680NPVC-XH](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#)
[BL1118CS8TR1833](#) [BL8563CKETR18](#) [BL8077CKETR33](#) [BL9153-33CC3TR](#) [BL9161G-15BADRN](#) [BL9161G-28BADRN](#)
[BRCO7530MMC](#) [CJ7815B-TFN-ARG](#) [LM317C](#) [GM7333K](#) [GM7350K](#) [XC6206P332MR](#) [HT7533](#) [LM7912S/TR](#) [LT1764S/TR](#) [LM7805T](#)
[LM338T](#) [LM1117IMP-3.3/TR](#) [HT1117AM-3.3](#) [HT7550S](#) [AMS1117-3.3](#) [HT7150S](#) [78L12](#) [HT7550](#) [HT7533-1](#) [HXY6206I-2.5](#) [HT7133](#)