

CUBE67 BUS NODES

Profibus DP

Art.No.: 56501

Weight: 0.450 kg

Country of origin: CZ

Model designation: Cube67 BN-P Profibus



Profibus DP

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

[Link to Product](#)

Illustration

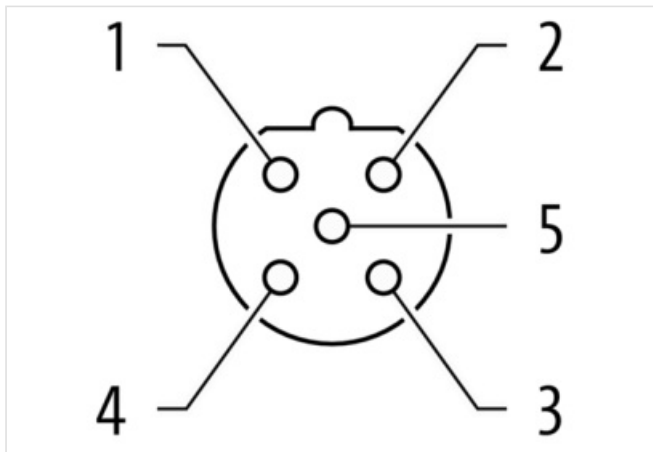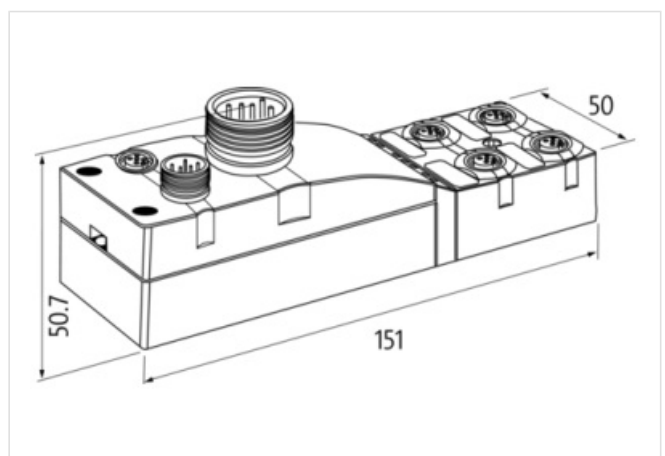

Product may differ from Image



Commercial data

URL Webshop	https://shop.murrelektronik.com/56501
GTIN	4048879048736
EU-Customs tariff number	85389099
US-Customs tariff number	8538908180

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-10

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

ECLASS-6.0	27242608
ECLASS-6.1	27242608
ECLASS-7.0	27242608
ECLASS-7.1	27242608
ECLASS-8.0	27242608
ECLASS-8.1	27242608
ECLASS-9.0	27242608
ECLASS-9.1	27242608
ECLASS-10.0.1	27242608
ECLASS-10.1	27242608
ECLASS-11.0	27242608
ECLASS-11.1	27242608
ECLASS-12.0	27242608
ECLASS-13.0	27242608
ECLASS-14.0	27242608
ETIM-5.0	EC001604
ETIM-6.0	EC001604
ETIM-7.0	EC001604
ETIM-8.0	EC001604
ETIM-9.0	EC001604
ETIM-10.0	EC001604
customs tariff number	85389099
EAN	4048879048736
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Total current US max.	8 A
Total current UA max.	8 A
Current consumption max.	120 mA

Industrial communication | Bus data

Address setting type	Rotary switch
Address range min.	0
Address range max.	99

Diagnostics

Short circuit diagnosis	Yes
Overload diagnosis	Yes
Diagnostic	No voltage, Under voltage
Diagnostic via BUS	per module and channel
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Mechanical data

Number extension modules max.	16
-------------------------------	----

Mechanical data | Mounting data

Height	151 mm
Width	50 mm
Depth	50,3 mm
Suitable for mounting type	2-hole screw mounting

Environmental characteristics | Climatic

Operating temperature min.	0 °C
----------------------------	------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PLC Controllers](#) category:

Click to view products by [Murr Elektronik](#) manufacturer:

Other Similar products are found below :

[SL-TBP4-PN](#) [FP0-CCLS](#) [FP2-Y32T](#) [SL-TB4-PN](#) [CP1H-Y20DT-D](#) [EASY-E4-AC-12RCX1P](#) [EASY-E4-AC-16RE1P](#) [EASY-E4-AC-8RE1P](#)
[EASY-E4-DC-12TC1P](#) [EASY-E4-DC-16TE1P](#) [EASY-E4-DC-4PE1P](#) [EASY-E4-DC-6AE1P](#) [EASY-E4-DC-8TE1P](#) [EASY-E4-UC-12RCX1P](#)
[EASY-E4-UC-16RE1P](#) [EASY-E4-UC-8RE1P](#) [EASY-BOX-E4-AC1](#) [6GK1901-1BB30-0AA0](#) [6ES7521-1BL10-0AA0](#) [6ES7226-6RA32-0XB0](#)
[6ES7590-1AE80-0AA0](#) [TM200C32R](#) [6ES7954-8LF04-0AA0](#) [6ES7590-1AC40-0AA0](#) [XW2K40GO32C](#) [56501](#) [6AG40210AA200AA6](#)
[56527](#) [57105](#) [56521](#) [6ES75152FM020AB0](#) [6ES75262BF000AB0](#) [6AG40210AA200AA1](#) [6ES72141AF500XB0](#) [6ES72141AH500XB0](#)
[6AG12211BH322XB0](#) [6ES71314BF000AA0](#) [6ES71314BD010AA0](#) [6ES71513BA230AB0](#) [6AG11316BF007CA0](#) [6AG12315PD324XB0](#)
[6ES71384FA050AB0](#) [6ES72121HG500XB0](#) [6ES72141HH500XB0](#) [6ES73231BH010AA0](#) [6ES75111AL030AB0](#) [6ES75111FL030AB0](#)
[6ES75121DK010AB0](#) [6ES75121SM030AB0](#) [6ES75131AM030AB0](#)