

S-Switch 22 2NO 1x90° LO M12(4)

Select switch 1x90° locked

Art.No.: 69071

Weight: 0.017 kg

Country of origin: HU

Model designation: S-Switch 22 2NO 1x90° LO M12(4)

S-Switch 22 2NO 1x90° LO M12(4)

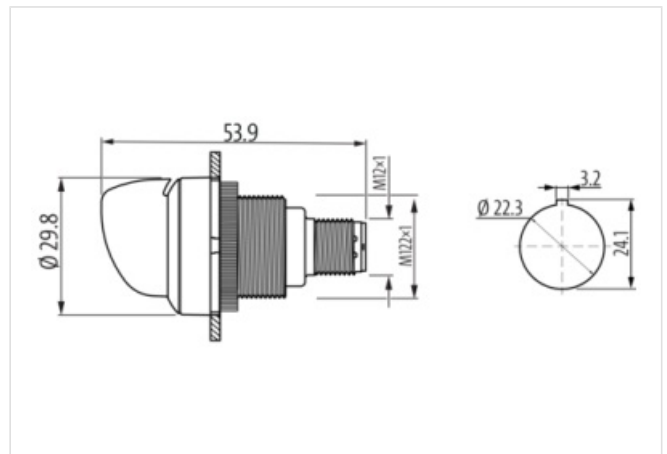
Select switch 1x90° locked

Mounting hole 22,3 mm

Connection M12 (4-pin)

Link to Product**Illustration**

Product may differ from Image

**Commercial data**

Material short text	S-Switch 22 2NO 1x90° LO M12(4)
URL Webshop	https://shop.murrelektronik.com/69071
GTIN	4065909019252
ECLASS-6.1	27371243
ECLASS-7.0	27371243
ECLASS-7.1	27371243
ECLASS-8.0	27371243
ECLASS-8.1	27371243
ECLASS-9.0	27371243
ECLASS-9.1	27371243
ECLASS-10.0.1	27371243
ECLASS-10.1	27371243
ECLASS-11.0	27371243
ECLASS-11.1	27371243
ECLASS-12.0	27371243
ECLASS-13.0	27371243
ECLASS-14.0	27371243

ETIM-5.0	EC001029
ETIM-6.0	EC001029
ETIM-7.0	EC001029
ETIM-8.0	EC001029
customs tariff number	85365080
EAN	4065909019252
Packaging unit	1

Electrical data | Supply

Rated operating voltage AC-15	35 V
Rated operating voltage DC-13	35 V
Rated operating current	0,1 A

Electrical data | Input

Short-circuit current	1.000 A
-----------------------	---------

Electrical data | Output

Voltage switching AC min.	1 V
Switching voltage AC max.	32 V
Voltage switching DC min.	1 V
Switching voltage DC max.	32 V
Switching voltage AC max. (UL 60947)	30 V
Switching voltage DC max. (UL 60947)	30 V
Switching current min.	1 mA
Switching current max.	100 mA
Switching power max.	0,25 W

Installation | Connection

Family construction form	M12
--------------------------	-----

Installation | Pin assignment

Coding	A
No. of poles	4

Device protection | Electrical

Installation height max. ASL	2.000 m
Degree of protection front (EN IEC 60529)	IP65
Degree of protection back (EN IEC 60529)	IP65
Pollution Degree	2
Short circuit protective device (SCPD)	fuse 250 V / 0.1 A / 1.5 kA gG quick
Overvoltage category (EN 60950-1)	II
Rated insulation voltage	250 V

Device protection | Mechanical

Mechanical endurance	200.000 cycles
Mechanical endurance B10	250.000 cycles
UL enclosure type rating front side	type 4X

Device protection | Media

Salt-spray resistance (IEC 60068-2-11)	Yes
--	-----

Mechanical data

Shape collar	round
Color collar	black
Actuating function	latching
Contact type	2 S
Color	black
Color bezel	white
Color front ring	black
Can be illuminated	No

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Selector Switches](#) category:

Click to view products by [Murr Elektronik](#) manufacturer:

Other Similar products are found below :

[AS6Q-2Y2P](#) [ASD202NU-104](#) [TC-412N2](#) [508A229G01](#) [956-3127-BX](#) [25303A](#) [LBW6S-3T3](#) [ASS211N](#) [LB2S-2T1](#) [HA3S-2C6](#) [LB2S-2LT3](#)
[Q25LWK1-GN/WB](#) [CW1S-2LE20](#) [CW1S-3E02](#) [52-435.036](#) [ASD311NU-203](#) [LB1F-3T63A](#) [ASLD22220DNUW](#) [HW1F-2F10QD-WA-12V](#)
[LB1S-2T2](#) [1.10.021.005/0021](#) [50HA109659](#) [ASLW224620D-R](#) [50HA1E811R](#) [HA1S-2C6](#) [52SA2CABA2](#) [ASD3120NU](#) [HW1F-2P11Q4S](#)
[HW4S-2LF10](#) [M22-WK](#) [M22-WKV](#) [M22-WRK](#) [M22-WRK3](#) [M22-WRLK3-Y](#) [M22-WRLK-R](#) [M22-WRLK-W](#) [M22S-WKV](#) [XB4BJ21](#)
[XB4BJ33](#) [2441D](#) [3SU1100-2BF60-1BA0](#) [3SU1100-2BF60-1MA0](#) [3SU1100-2BL60-1NA0](#) [3SU1100-2BM60-1NA0](#) [3SU1150-2BF60-1BA0](#)
[M22-WKV/K11](#) [XB4BK125B5](#) [LB6MF-2T64G](#) [LBW6S-2T6](#) [XB7ND21](#)