

MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24 V DC OUT: 24 V / 6 A

Art.No.: 9000-41078-0600001

Weight: 0.150 kg

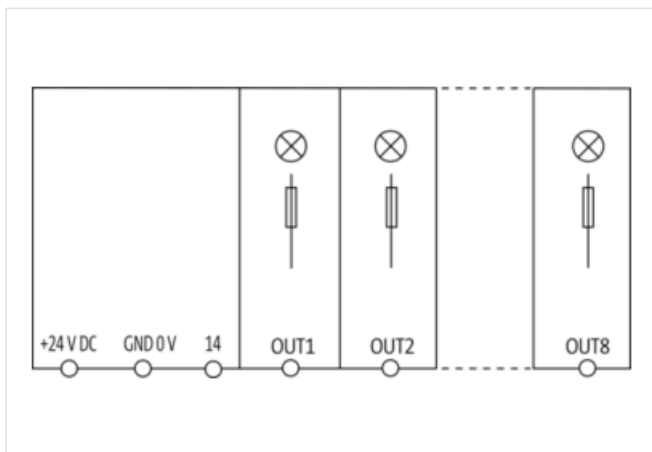
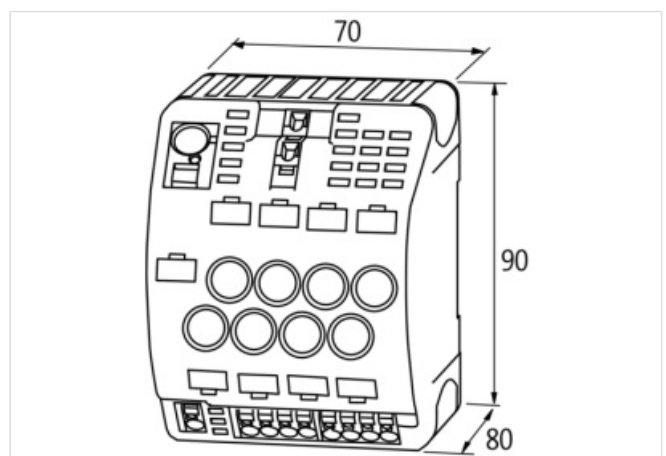
Country of origin: CZ

Model designation: MICO FUSE 24 LED

MICO FUSE 24 LED

8 channels

Total current: max. 40 A

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

URL Webshop	https://shop.murrelektronik.com/9000-41078-0600001
GTIN	4048879335263
Customs tariff number	85363030
ECLASS-6.0	27371802

ECLASS-6.1	27142107
ECLASS-7.0	27371802
ECLASS-7.1	27371802
ECLASS-8.0	27371802
ECLASS-8.1	27371802
ECLASS-9.0	27371802
ECLASS-9.1	27371802
ECLASS-10.0.1	27371802
ECLASS-10.1	27371802
ECLASS-11.0	27371802
ECLASS-11.1	27371802
ECLASS-12.0	27371802
ECLASS-13.0	27371802
ECLASS-14.0	27371802
ETIM-5.0	EC001440
ETIM-6.0	EC001440
ETIM-7.0	EC001440
ETIM-8.0	EC001440
customs tariff number	85363030
EAN	4048879335263
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Operating current max.	6 A
Total current max.	40 A

Electrical data | Output

Switching current max.	20 mA
------------------------	-------

Installation

Connection cross-section inputs max.	16 mm ²
Connection cross-section outputs min.	0,5 mm ²
Connection cross-section outputs max.	4 mm ²
Connection cross-section control inputs / control outputs max.	2,5 mm ²

Mechanical data | Mounting data

Height	90 mm
Width	70 mm
Depth	80 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Derating	40 °C

Connection type 5

Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	24 V DC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fuse Holder](#) category:

Click to view products by [Murr Elektronik](#) manufacturer:

Other Similar products are found below :

[F600A3B](#) [80910080](#) [9-3557-GP REV A](#) [15602-04-08-21](#) [HMG-241](#) [32NNL](#) [3992](#) [6T30A2S](#) [T400A1B](#) [BP/HHA-RP](#) [01520900H](#) [BK/HTB-](#)
[68M-R](#) [0101590](#) [15306-2-2-4](#) [LMI7-M-2-LGG1GGG](#) [15402-1-2-1-0A](#) [15600-12-00](#) [3587-20TR](#) [0HBF0001ZXSEALP](#)
[0HBF0001ZXSEALY](#) [0HBF0001ZX3BBAR](#) [485720](#) [354175](#) [485224](#) [485304](#) [485003](#) [485010](#) [485105](#) [485111](#) [485112](#) [485184](#) [485185](#)
[485191](#) [485205](#) [485206](#) [485211](#) [0101470](#) [0101494](#) [0101510](#) [0101660](#) [0101698](#) [LPA-01W-16R](#) [LPA-01W-18R](#) [LPA-02W-12R](#) [LPA-02W-](#)
[16R](#) [LPA-04Y](#) [LPA-05W-12R](#) [LPM-01B-12B](#) [LPR-02B-12OR](#) [LPR-03B-16R](#)