


# MYD-LD25X Development Board Overview

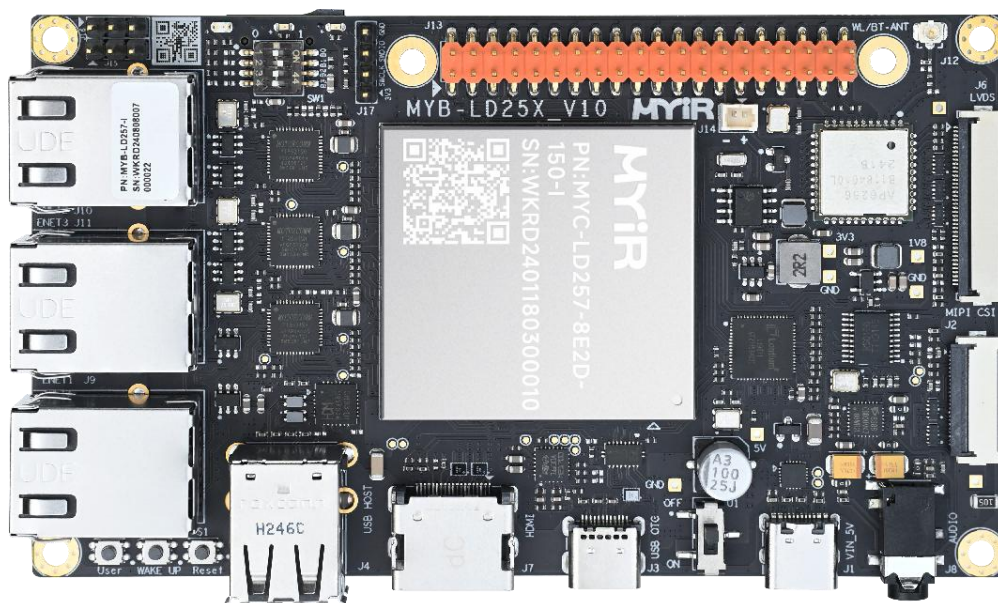


- ✓ MYC-LD25X SOM as Controller Board
- ✓ ST STM32MP257D Processor (STM32MP257DAK3)
- ✓ 1.5GHz Dual ARM Cortex-A35 and 400MHz Cortex-M33 Cores
- ✓ Neural Processing Unit (NPU) with 1.35 TOPS and 3D Graphics Processing Unit (GPU)
- ✓ 1GB/2GB LPDDR4, 8GB eMMC, 256Kbit EEPROM
- ✓ 1x USB2.0 OTG, 2x USB2.0 HOST, 3x Gigabit Ethernet, WiFi/Bluetooth, 1x Micro SD Card Slot
- ✓ LVDS, HDMI, MIPI-CSI, Audio Input/Output
- ✓ Supports for Linux and Debian OS
- ✓ Optional 7-inch LCD Module, Camera Module and RPI Module (RS232/RS485/CAN)

The MYD-LD25X Development Board is a comprehensive evaluation platform tailored for the [ST STM32MP257D](#) processor. This processor is based on dual Arm Cortex-A35 cores operating at up to 1.5 GHz and a Cortex-M33 core running at 400 MHz. It features 3 Ethernet ports, 3 FDCAN interfaces, a 1.35TOPs NPU, a 3D GPU, LVDS/DSI display interfaces, and H.264 encoding/decoding capabilities, making it ideal for Industry 4.0 and advanced edge computing applications that require high-end multimedia capabilities.


The MYD-LD25X Development Board is built around the MYC-LD25X System-On-Module (SOM), leveraging the 252-pin LGA expansion interface to expose the extensive features of the STM32MP257D Processor to its base board. Operating on a 5V/3A USB power supply, the board boasts a rich set of peripherals, including 2x USB 2.0 Host ports, 1x USB 2.0 OTG, 3x Gigabit Ethernet interfaces, a Micro SD card slot, and an integrated WiFi/Bluetooth module. Additionally, it supports LVDS and HDMI display outputs, incorporates a MIPI-CSI interface, and provides an audio interface. Furthermore, the inclusion of a 2\*20-pin Raspberry Pi (RPI) extension interface provides access to additional resources such as GPIO, I2C, UART, SPI, and CAN, enabling users to customize and enhance their development endeavors.

The MYD-LD25X Development Board is capable of supporting both Linux and Debian12 Operating Systems, ensuring stable and efficient performance. MYIR provides abundant software resources, including kernel and driver source code, as well as detailed documentation and tools that facilitate rapid and easy development for users. These resources provide the necessary support to developers, enabling them to focus on creating innovative and exciting applications. It is suitable for a wide range of applications, including high-end industrial HMI, edge computing gateways, new energy charging stations, energy storage EMS systems, industrial automation PLCs, motion controllers, and more.

The MYD-LD25X Development Board comes with a Quick Start Guide and one USB to TTL cable. MYIR also offers MY-LVDS070C 7-inch LCD Module, MY-CAM003M Camera Module and MY-WIREDCOM RPI Module as add-on options for the board.

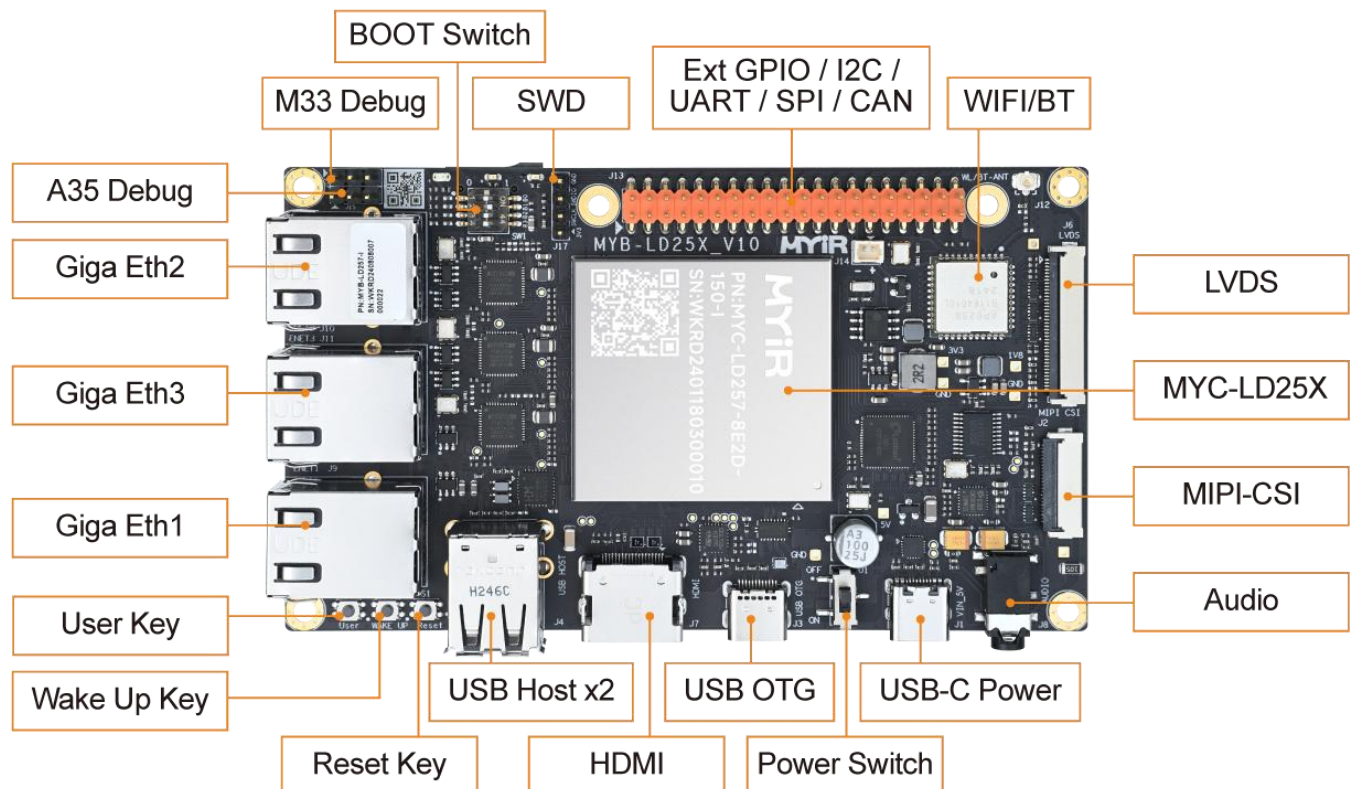


*Top-view of MYD-LD25X Development Board*

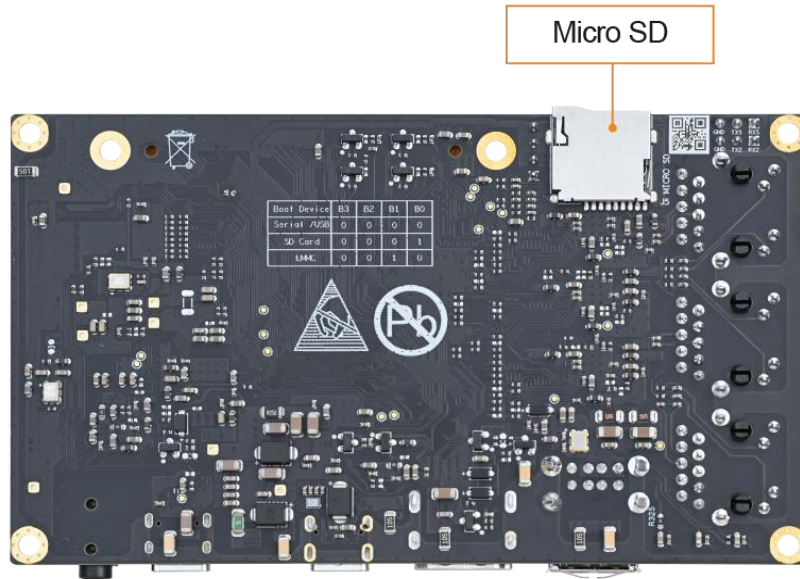

Bottom-view of MYD-LD25X Development Board

## Hardware Specification

The MYC-LD25X System-on-Module (SOM) mounted on the MYD-LD25X Development Board uses the 14 x 14mm, 0.5mm ball pitch, 424-ball VFBGA packaged 1.5 GHz ST STM32MP257D microprocessor (STM32MP257DAK3). This processor belongs to the ST STM32MP25xA/D product line, which features a dual-core Arm Cortex-A35 (operating at up to 1.5 GHz) and a single-core Arm Cortex-M33 (running at up to 400 MHz). Additionally, it includes a neural processing unit (NPU) with 1.35 TOPS and a 3D graphics processing unit (GPU). The processor is further enhanced with an integrated video encoder and decoder. A rich set of interfaces is supported by the processor, such as three Ethernet ports with switch and TSN capabilities, FD-CAN, PCIe/USB3.0, and others. It also supports Parallel and MIPI CSI-2 for camera connections and Parallel, LVDS, and MIPI DSI for display connectivity. These features make STM32MP25xA/D devices well-suited for a wide range of consumer, industrial, white goods and medical applications.

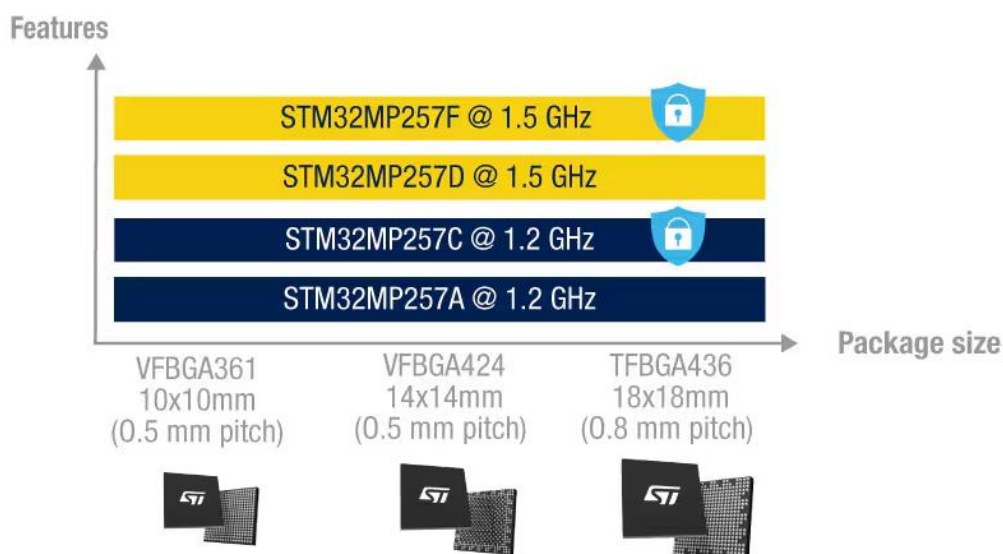

All security features activated.

Note: Packages can support low-cost PCB down to a 4-layer PTH

## STM32MP257 Application Processors






The MYD-LD25X Development Board is using the MYC-LD25X SOM as core controller board. It takes full features of ST STM32MP257D processor and the main features are characterized as below:

#### **Mechanical Parameters**

- Dimensions: 120mm x 70mm (base board), 37mm x 39mm (SOM)
- PCB Layers: 6-layer design (base board), 12-layer design (SOM)
- Power supply: +5V/3A (base board), +5V/3A (SOM)
- Working temperature: -40~85 Celsius (industrial grade)  
(WiFi/BT Module: -30~85 Celsius)

#### **The MYD-LD25X Controller Board (MYC-LD25X SOM)**

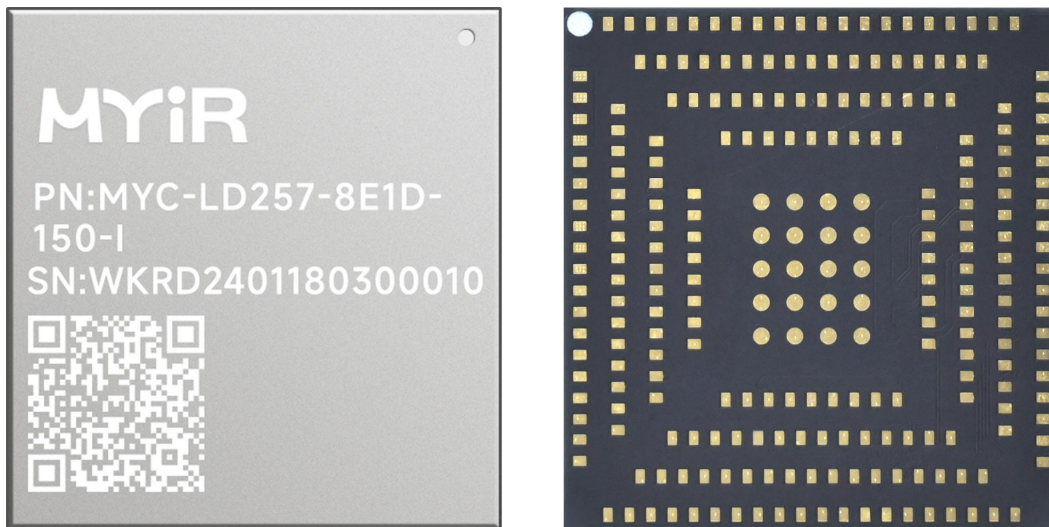

*MYC-LD25X Top-view and Bottom-view*

#### **Processor**

- ST STM32MP257D Processor (STM32MP257DAK3)
  - Dual-core Arm Cortex-A35 64-bit RISC core operating at up to 1.5 GHz
  - A Cortex-M33 32-bit RISC core operating at up to 400 MHz
  - Neural Processing Unit (NPU) operating at up to 1.35 TOPS, 3D GPU
  - H.264 encoding/decoding

#### **Storage**

- 1GB/2GB LPDDR4
- 8GB eMMC
- 256Kbit EEPROM

#### **PMIC**

- Power Management IC: STPMIC25APQR

#### **Peripherals and Signals Routed to Pins**

- 252-pin LGA Expansion Interface
  - 3x RGMII
  - 1x USB 2.0 HOST



- 1x USB 3.0 OTG
- 4x USART
- 5x UART
- 8x SPI
- 7x I2C
- 4x I3C
- 3x CAN FD
- 2x SD/MCC
- 4x SAI
- 1x Parallel RGB
- 1x MIPI DSI
- 2x LVDS
- 1x MIPI CSI
- 1x DCMI
- 1x JTAG
- 1x SWD
- Up to 128x GPIOs


*Note: the peripheral signals brought out to the expansion interface are listed in maximum number. Some signals are reused. Please refer to the processor datasheet and the SOM pinout description file.*

### **The MYD-LD25X Development Board Base Board**


- 5V/3A USB Power Supply (Type-C)
- 1x Power Switch
- 1x BOOT Switch
- 3x Buttons (1x USER, 1x Wake Up, 1x Reset)
- 3x Debug Serial Ports (one for Cortex-A35, one for Cortex-M33 and one for SWD)
- 2x USB 2.0 Host ports
- 1x USB 2.0 OTG port
- 3x 10/100/1000Mbps Ethernet interfaces
- 1x WiFi/BT Module (complies with IEEE 802.11 a/b/g/n/ac standard and supports Bluetooth V5.2)
- 1x Micro SD Card Slot
- 1x LVDS Display Interface
- 1x HDMI Display Interface
- 1x MIPI-CSI Camera Interface
- 1x Audio Input and Output Interface
- 1x 2.54mm 2 x 20-pin male expansion header

(RPI interface, GPIO/I2C/UART/SPI/CAN, compatible with Raspberry PI standard 40-pin extension interface)

*Supports MYiR's **MY-WIREDCOM RPI Module** to extend RS485, RS232 and CAN functions*

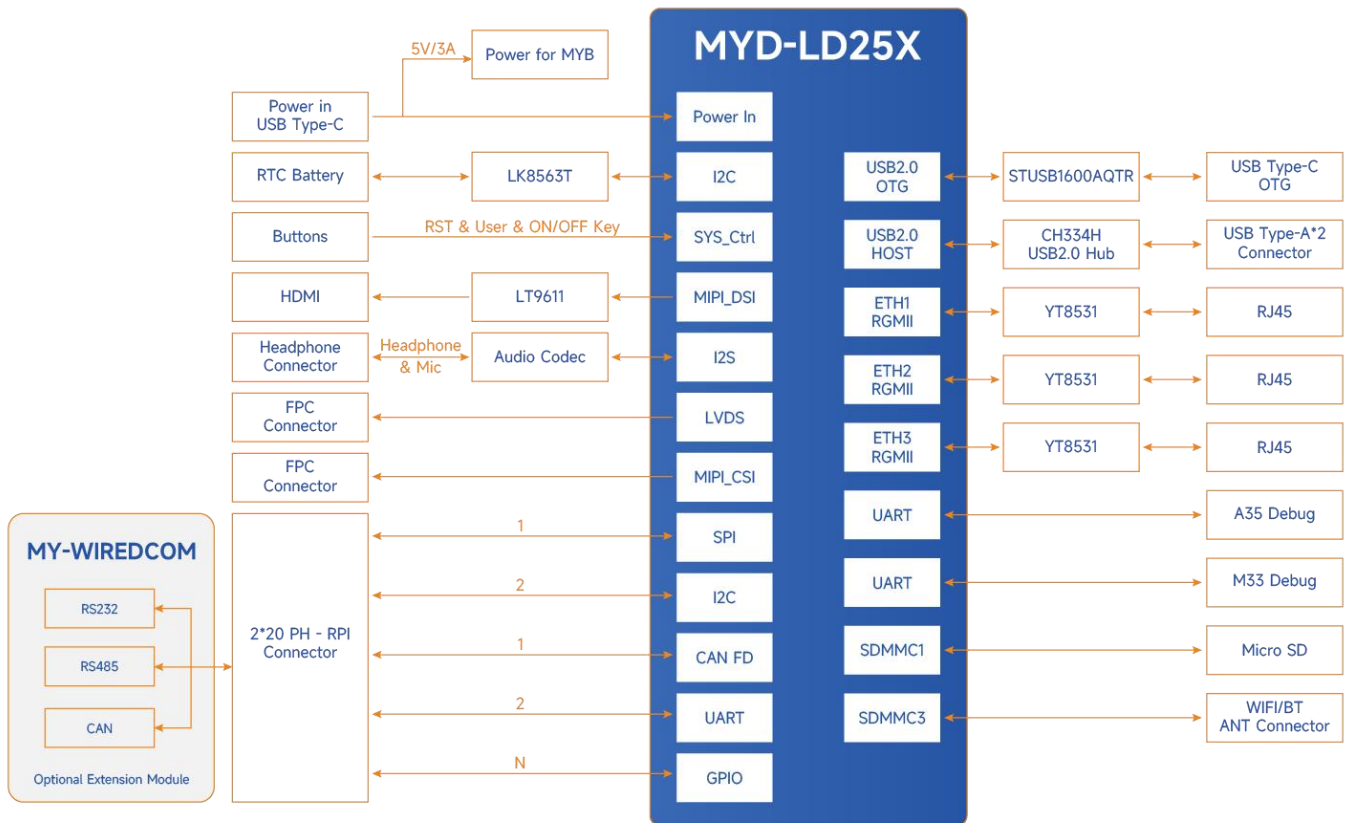

MYD-LD25X Function Block Diagram

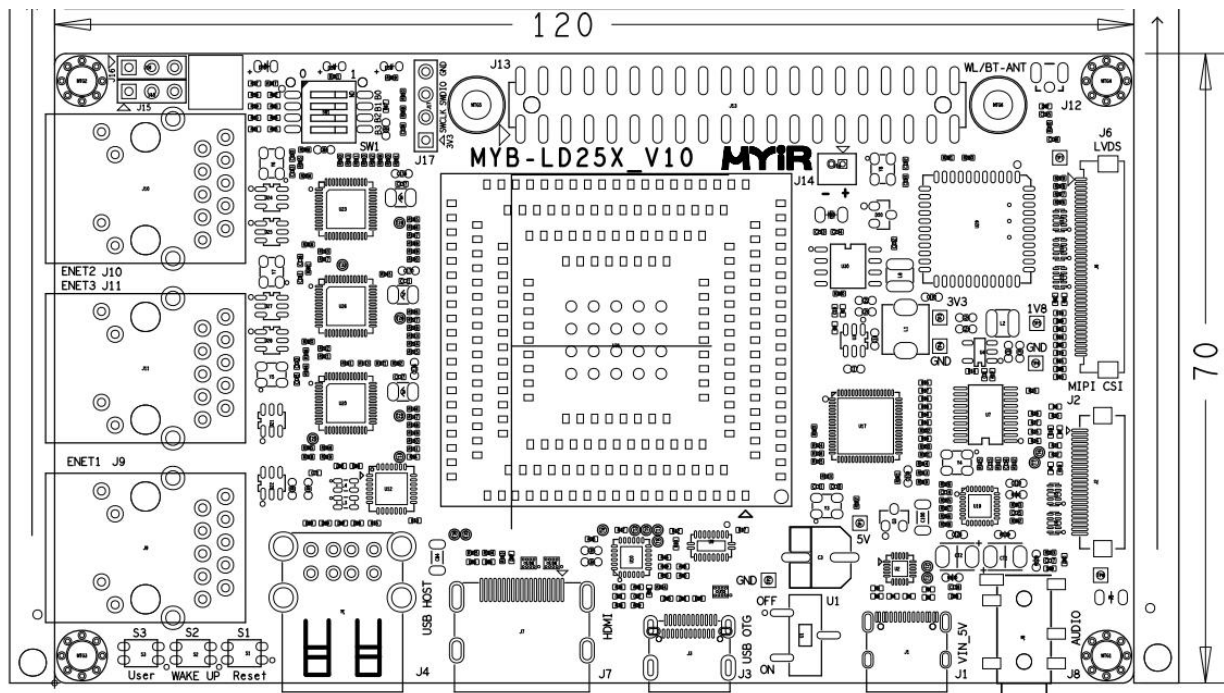

MYD-LD25X Dimensions Chart (Unit: MM)



## Software Features

The MYD-LD25X development board supports Linux 6.1 and Debian 12 OS, and comes with comprehensive software packages. To assist clients in accelerating their projects, the kernel and various peripheral drivers are provided in source code format. Here is a brief overview of the key software features:

| Item          | Features          | Features                                                            | Source Code |
|---------------|-------------------|---------------------------------------------------------------------|-------------|
| Bootloader    | TFA               | First bootloader 2.8.15                                             | YES         |
|               | U-boot            | The second boot program uboot_2022.10                               | YES         |
| Linux kernel  | Linux kernel      | Customized based on official kernel_6.1.82 version                  | YES         |
| Device driver | EEPROM            | BL24C256A driver                                                    | YES         |
|               | USB Host          | USB Host driver                                                     | YES         |
|               | USB OTG           | USB OTG driver                                                      | YES         |
|               | I2C               | I2C bus driver                                                      | YES         |
|               | SPI               | SPI bus driver                                                      | YES         |
|               | Ethernet          | YT8531SH-CA driver                                                  | YES         |
|               | LVDS              | LVDS display driver                                                 | YES         |
|               | HDMI              | LT9611 driver                                                       | YES         |
|               | Audio             | ES8388 Audio Driver                                                 | YES         |
|               | MIPI CSI          | OV5640                                                              | YES         |
|               | RTC               | LK8563T driver                                                      | YES         |
|               | GPIO              | General purpose GPIO driver                                         | YES         |
|               | UART              | RS232/RS485 driver                                                  | YES         |
|               | CAN               | CAN driver                                                          | YES         |
|               | WiFi              | AP6256 driver                                                       | YES         |
|               | BT                | AP6256 driver                                                       | YES         |
| File system   | myir-image-core   | Image without GUI interface built with Yocto that supports rt Linux | YES         |
|               | myir-image-full   | A fully functional QT and HMI image built with Yocto                | YES         |
|               | myir-image-debian | Image built with debian system                                      | YES         |

MYD-LD25X Software Features

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - ARM](#) category:*

*Click to view products by [MYIR](#) manufacturer:*

Other Similar products are found below :

[CY4541](#) [POLYPOD-BGA324](#) [POLYPOD-TQ176](#) [5786](#) [STM3240G-USB/NMF](#) [OM13090UL](#) [ZDSD-Pinboard](#) [081ZYKFB](#)  
[LKS32MC077MBS8-K](#) [LKS32MC038Y6P8B-K](#) [LKS32MC071DOC8T8-K](#) [LKS32MC038Y6P8-k](#) [Ai-WB2-32S-Kit](#) [XDS601](#) [VC-02-Kit\\_EN](#) [Ra-08H-Kit](#) [PB-03M-Kit](#) [Ai-WB2-13-Kit](#) [PB-03F-Kit](#) [Ra-08-Kit](#) [Hi-07SL-Kit](#) [PB-03-Kit](#) [AT-START-F407](#) [FT8132Q-3HALL-FOC+EMF](#) [EPC1EVK-ECGPPG\(FS\)](#) [.ENS1EVKB](#) [HLK-V20-SUIT](#) [JLC-DIG01](#) [JLC-DIG02](#) [LKS32MC057EM6S8-K](#)  
[LKS32MC051DC6T8-K](#) [LKS32MC088C6T8-K](#) [LKS32AT039PXL5G6Q9B-3K](#) [LKS32AT039PXL5G6Q9B-K](#) [LKS32MC086N8Q8-K](#)  
[LKS32MC037QM6Q8-K](#) [LKS32MC074DF8Q8-K](#) [LKS32MC034DF6Q8-k](#) [LKS32MC051C6T8-K](#) [LKS32MC081C8T8-K](#)  
[LKS32MC083C8T8-K](#) [LKS32MC081C8T8-GK](#) [LKS32MC057M6S8-K](#) [LKS32MC037M6S8-K](#) [LKS32MC071C8T8-K](#) [LKS32MC057M6S8-GK](#) [LKS32MC054DF6Q8-K](#) [LKS32AT085C8Q9-K](#) [LKS32MC082K8Q8-K](#) [LKS32MC087M6S8-K](#)