

Product Specification

NHD-4.3-HDMI-HR-RSXP

TFT Liquid Crystal Display

NHD-	Newhaven Display
4.3-	4.3" Diagonal
HDMI-	HDMI Interface
HR-	800x480 Resolution
RSXP-	IPS Display
	No Touch

Table of Contents

Document Revision History	2
Mechanical Drawing	3
Schematics	4
Electrical Characteristics	7
HDMI Receiver Information	7
Technical Resource	7
EDID Array	8
EDID Timing	8
Quality Information	9

Additional Resources


- **Support Forum:** <http://www.nhdforum.newhavendisplay.com>
- **Github:** <https://github.com/newhavendisplay>
- **Example Code:** https://www.newhavendisplay.com/example_code.html
- **Knowledge Center:** https://www.newhavendisplay.com/knowledge_center.html
- **Quality Center:** https://www.newhavendisplay.com/quality_center.html
- **Precautions for using LCDs/LCMs:** <https://www.newhavendisplay.com/specs/precautions.pdf>
- **Warranty / Terms & Conditions:** <https://www.newhavendisplay.com/terms.html>




Document Revision History

Revision	Date	Description	Changed By
0	09/29/2021	Initial Release	ZP
1	1/10/2022	Updated cover page, technical resource section, and mechanical drawing.	CJ


Mechanical Drawing

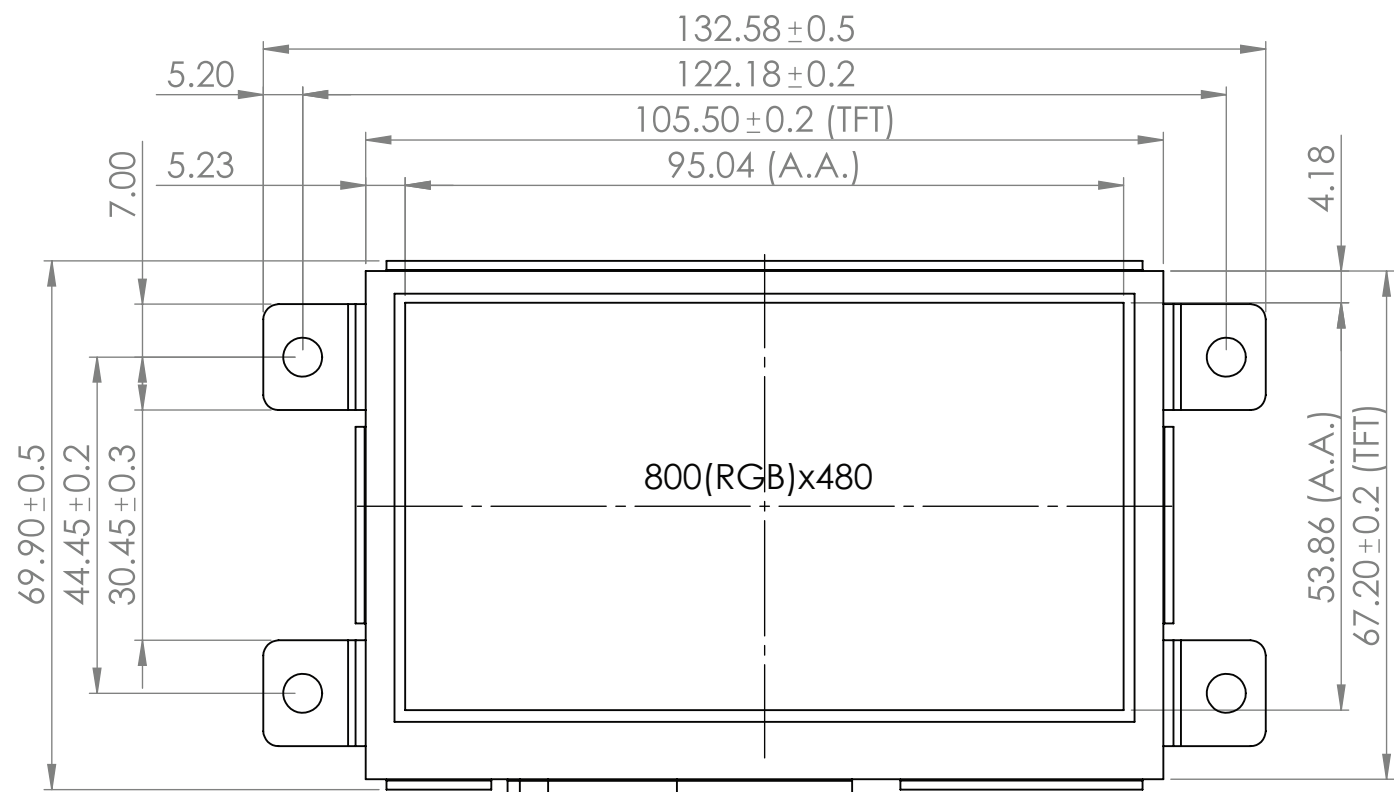

[read caution below]

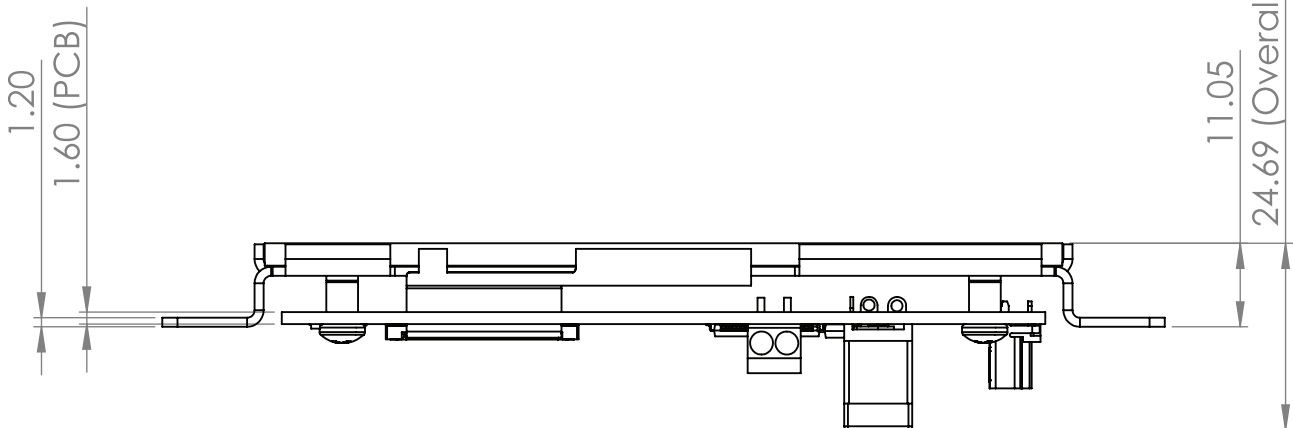

SYMBOL	REVISION	DATE

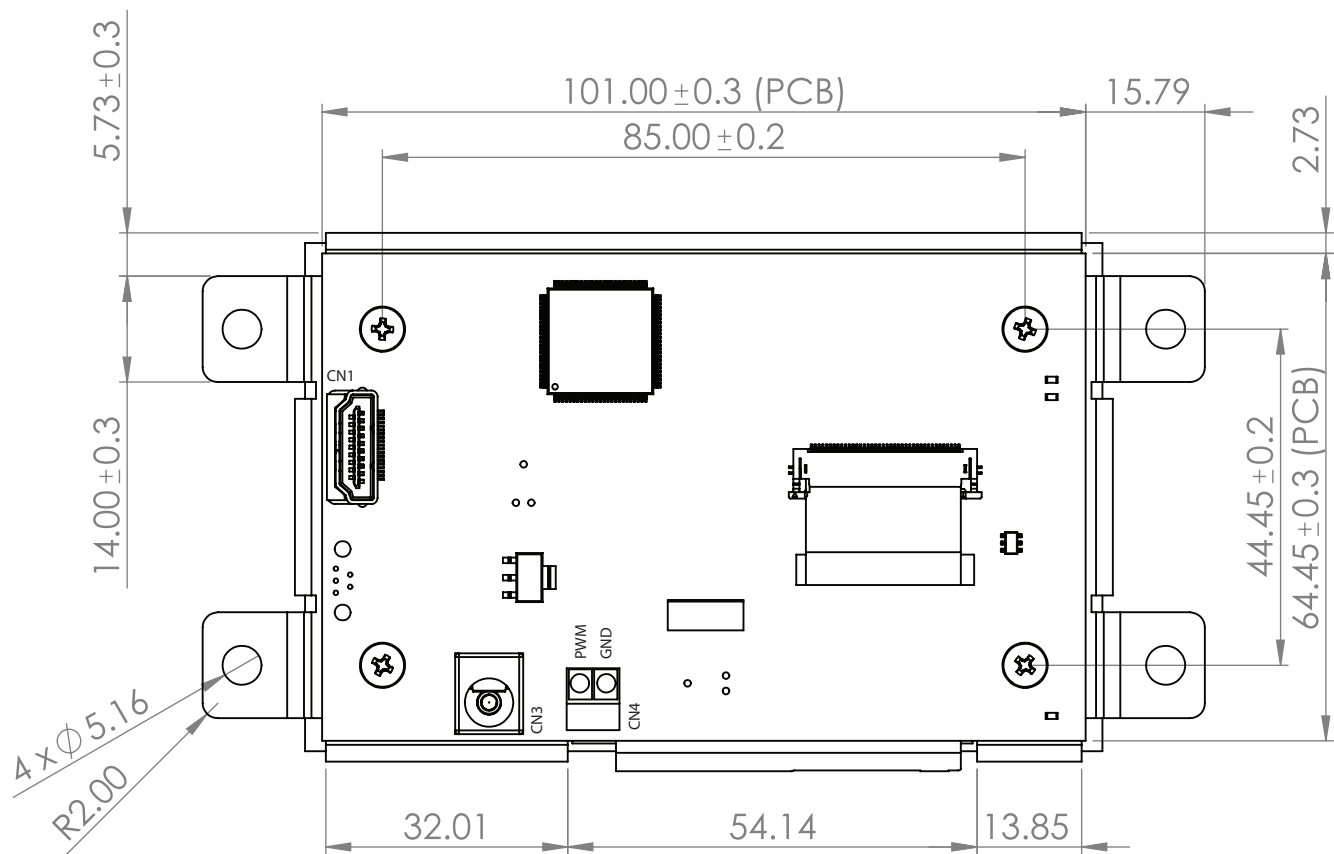

Product Description: 4.3" IPS TFT

1. TFT Driver IC: TFP401A


2. TFT Interface: 24-Bit RGB

3. TFT Power Requirement: 5V 615mA

4. Optical Features: Normally Black, Transmissive, Anti-Glare, 850 cd/m2

⚠ Improper handling of the FPC connection at the bottom edge of this module may cause damage resulting in display failure. Take special care when handling this area of the display module to make sure this connection is never strained nor creased.

STANDARD TOLERANCE: (UNLESS OTHERWISE SPECIFIED)	 NEWHAVEN DISPLAY INTERNATIONAL	
LINEAR: ±0.3mm	DRAWING/PART NUMBER: NHD-4.3-HDMI-HR-RSXP	REVISION: -
UNLESS OTHERWISE SPECIFIED:	DRAWN BY: C. Johnson	APPROVED BY: A. Khan
- DIMENSIONS ARE IN MILLIMETERS	DRAWN DATE: 01/10/22	APPROVED DATE: 1/10/22
- THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	SHEET 1 OF 1
THIS DRAWING IS SOLELY THE PROPERTY OF NEWHAVEN DISPLAY INTERNATIONAL, INC. THE INFORMATION IT CONTAINS IS NOT TO BE DISCLOSED, REPRODUCED OR COPIED IN WHOLE OR PART WITHOUT WRITTEN APPROVAL FROM NEWHAVEN DISPLAY.		

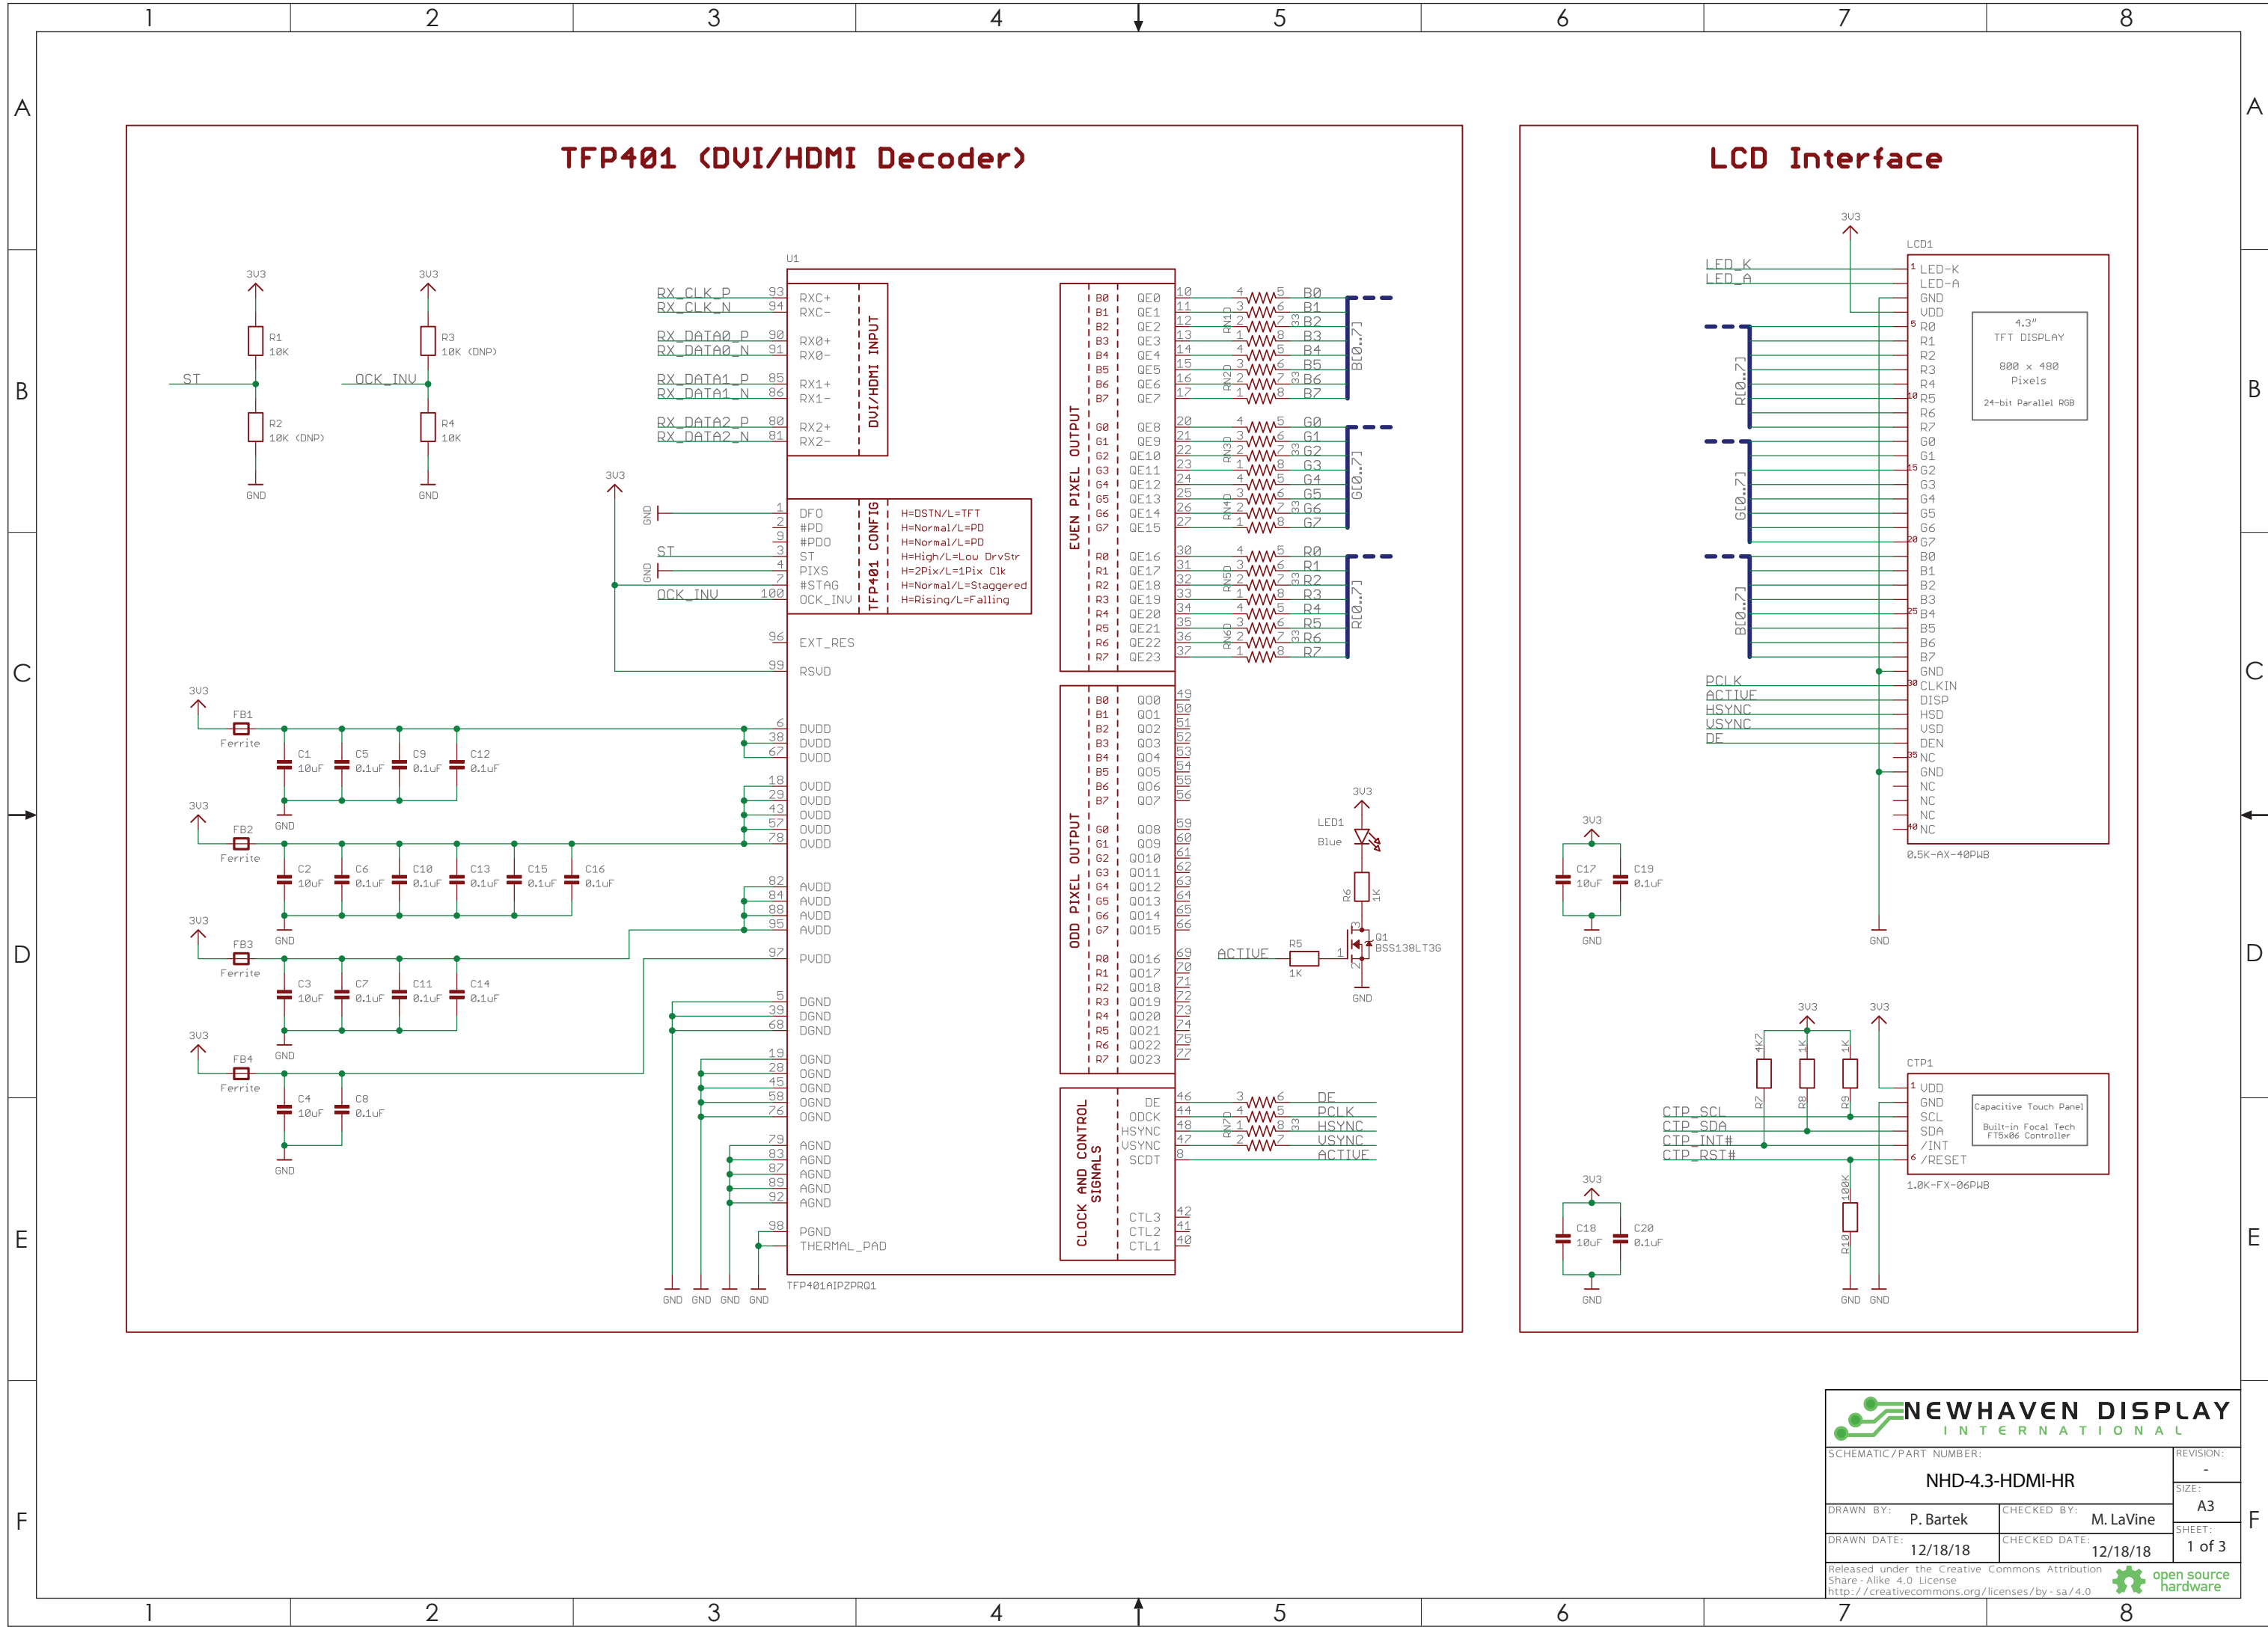

12345678

A

A

B

B

C

C

D

D


E

E


F

F


Backlight LED Driver

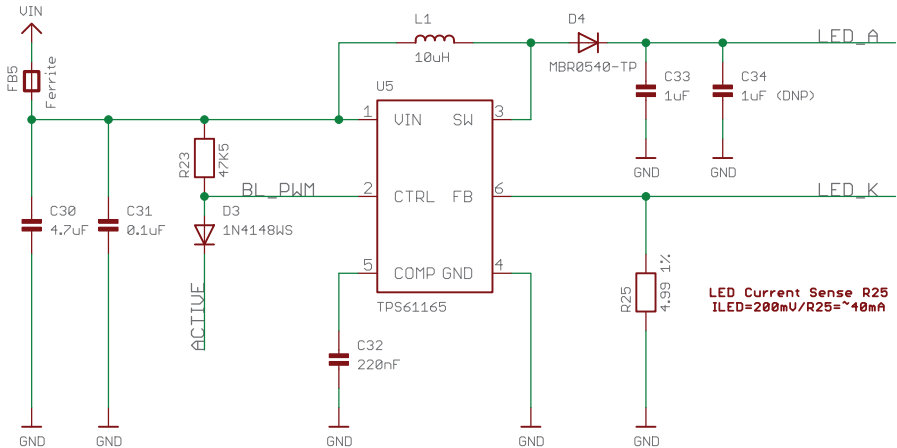


3.3V Regulator 1.2A

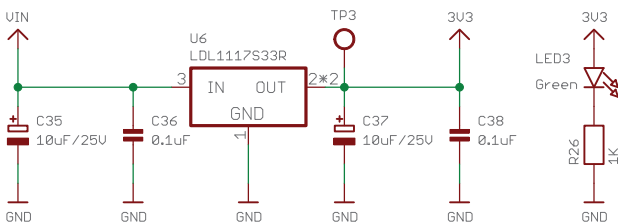

UIN / PWM

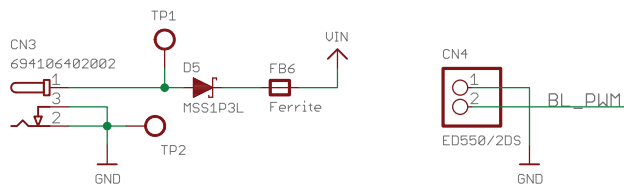

Mounting Holes 3.2mm Plated



BOARD VERSIONS

CTU Version: (DNP) - C21, C23, C34, CN5, CN6, D1, D2, R2, R3, R18, R24, U3

Non-Touch Version: (DNP) - C18, C21, C25, C26, C20, C23, C27, C28, C29, C34, CTP1, CN2, CN5, CN6, D1, D2, LED2, Q2, R2, R3, R17, R7, R10, R16, R19, R20, R24, R18, R8, R9, R21, R22, RN8, U3, U4, Y1

12345678

Electrical Characteristics

Item	Symbol	Condition	Min.	Typical	Max.	Unit
Operating Temperature Range	T _{OP}	Absolute Max	-20	-	+70	°C
Storage Temperature Range	T _{ST}	Absolute Max	-30	-	+80	°C
Backlight PWM Voltage	V _{PWM}	-	2.5	3.3	5.5	V
Backlight PWM Frequency	f _{PWM}	V _{PWM} = 3.3V	5	-	100	kHz
Module Supply Voltage	V _{DD}	-	5.0	-	7.0	V
Module Supply Current	I _{DD}	V _{DD} = 5.0V	-	615	650	mA
		V _{DD} = 7.0V	-	530	560	mA

HDMI Receiver Information

On-board Texas Instruments TFP401A Receiver. To view the full TFP401A specification, please download it by accessing the link: <http://www.ti.com/lit/ds/slids190a/slids190a.pdf>

Technical Resource

3D Model	TFT Panel Used	Display Type	Luminance Rating	Optimal Viewing Angle	Touch Panel
NHD-4.3-HDMI-HR-RSXP	NHD-4.3-800480CF-ASXP	IPS, Sunlight Readable	850 cd/m ²	85° all angles	No Touch

Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	+80°C, 96 hrs.	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C, 96 hrs.	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C, 96 hrs.	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C, 96 hrs.	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+60°C, 90% RH, 96 hrs.	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-20°C, 30min->25°C, 5min -> 70°C, 30min = 1 Cycle 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	10-55Hz, 15mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes	3
Static electricity test	Endurance test applying electric static discharge.	Air: V _s =±8KV, Contact: V _s =±4KV 10 Times	

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TFT Displays & Accessories](#) **category:**

Click to view products by [Newhaven Display](#) **manufacturer:**

Other Similar products are found below :

[HDA430T-3G1H](#) [NB-ATT01](#) [OAI-80038AA-2008-A](#) [315-U004B15300](#) [EA WF050-40S](#) [EA WF050-40ST](#) [DEM 480272G2 VMX-PW-N \(A-TOUCH\)](#) [DEM 1024600N VMX-PW-N \(C-TOUCH\)](#) [SM-RVT50HQHNWCA0](#) [PH240320T068-LAB08](#) [PH480272T005-IAC02](#) [DEM 1024600P VMH-PW-N \(A-TOUCH\)](#) [DEM 800480T1 TMH-PW-N \(C-TOUCH\)](#) [DEM 800480T1 TMH-PW-N \(A-TOUCH\)](#) [SM-RVT50HQHNWC00](#) [PH800480T033-ICB01](#) [RFE430W-AWW-DNN](#) [PH240320T068-LAA06](#) [SM-RVT50HQHNWC00-B](#) [DEM 268800A VMH-PW-N](#) [DEM 320240T2 VMX-PW-N \(A-TOUCH\)](#) [SM-RVT50HQHNWN00](#) [SM-RVT70HSSNWC00-B](#) [PH320240T-023-I03Q](#) [DEM 480480D VMX-PW-N \(A-TOUCH\)](#) [SM-RVT50HQHFWCA0](#) [DEM 480480E VMX-PW-N \(A-TOUCH\)](#) [KDA-070OB-18053S-A](#) [5206](#) [5393](#) [SM-RVT50HQHFWN00](#) [NHD-4.3-480272EF-ASXP-T](#) [PH128800T006-ZHC01](#) [PH176220T062-LAB05](#) [NHD-4.3-480272EF-ASXP](#) [SM-RVT70HSSNWC00](#) [DEM 320240T2 VMX-PW-N \(C1-TOUCH\)](#) [NHD-4.3-480272EF-ASXP-CTP](#) [RVA-SPK2.0W-C150](#) [SM-RVT50HQSFWA01](#) [SM-RVT50HQSNWA01](#) [DEM 240320J4 TMH-PW-N](#) [SM-RVT70HSSNWC00](#) [PH800480T037-ZAA](#) [NHD-5.0-800480AF-ASXP](#) [SM-RVT50HQSFWN01](#) [SM-RVT50HQSNWN01](#) [DEM 1024600P VMH-PW-N](#) [1046667](#) [RFF50YQ-1IW-DBN](#)