

A

B

C

D

E

A

B

C

D

E

**SPECIFICATIONS:**

Current rating:3.0A AC/DC  
 Voltage rating:250V AC/DC  
 Contact resistance:30m ohm MAX  
 Insulation resistance:5000M ohm MIN  
 Withstanding voltage:1000V AC for one minute  
 Operating temperature range:-40°C~+85°C

**MATERIAL AND FINISH**

Insulator:PBT+30%G.F(UL94V-0)  
 Contact:Copper Alloy Nickel Undercoated Selective Gold Plated  
 Finish:Metal Iron With Tin Plated

**PART NO.:**

Z-SUB DB \* M \* 2 \* \* \*

NO. OF CONTACTS  
 A=9PIN  
 B=15PIN  
 C=25PIN  
 E=37PIN

**MOUNTING OPTIONS**

1=RIVETED W/ SHIELD ONLY  
 2=RIVETED W/ FRONT RIVET  
 3=RIVETED W/ REAR RIVET  
 4=RIVETED W/ FRONT RIVET REAR RIVET

**NUT POST HEIGHT(H)**  
 0=5.8mm  
 1=4.8mm

LOGO  
 0=NO LOGO  
 2=NEXTRON LOGO



INSULATOR COLOR  
 0=BLACK  
 6=BLUE  
 9=WHITE

INSULATOR MATERIAL  
 0=PBT  
 2=NYLON

**CONTACT PLATED:(CONTACT AREA)**

1=FULL GOLD 1u"  
 7=FULL LIGHT TIN  
 A=GOLD 1u"/LIGHT TIN  
 B=GOLD 3u"/LIGHT TIN  
 C=GOLD 5u"/LIGHT TIN  
 E=GOLD 15u"/LIGHT TIN

CONTACT MATERIAL  
 2=BRASS

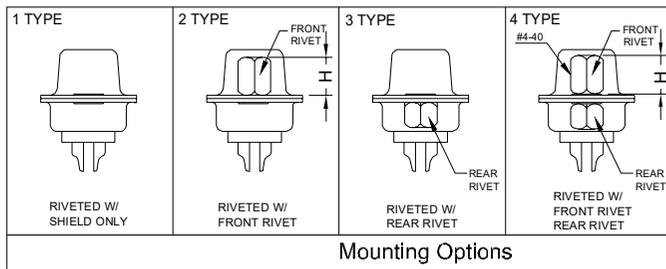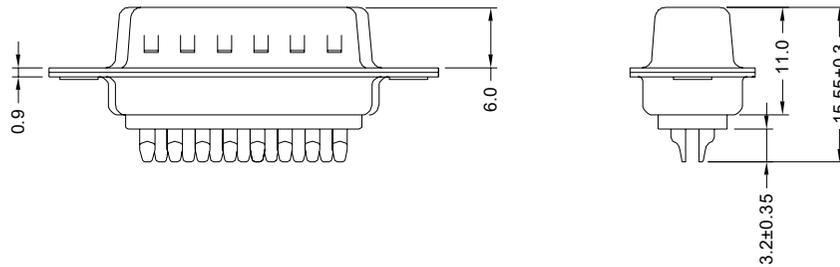

37P	55.42	63.50	69.32	8.38	12.50
25P	38.96	47.04	53.04	8.38	12.50
15P	25.25	33.32	39.14	8.38	12.50
9P	16.92	24.99	30.81	8.38	12.50
POS. NO.	A	B	C	D	E
	DIMENSION				



B	ECN-19105	Δ=1	2019/11/29
A4	ADD LOGO AREA		2017/08/07
REV.	DESCRIPTION		DATE

UNITS: ■ mm □ inch	SIZE A3	NAME: D-SUB 焊接式 PCB 公端	 NEXTRONICS ENGINEERING CORP.	
GENERAL TOLERANCE: (UNLESS SPECIFIED)		PART NO: Z-SUBDBXMX2XXXX	TITLE: CUSTOMER DWG	
4 PLACE	± **	mm	APPD: Linson 曾偉雄	2019/12/02
3 PLACE	± **	inch	CHKD: Linson 曾偉雄	2019/12/02
2 PLACE	± 0.20		DRAW:	
1 PLACE	± 0.30		DESIGN: Lu 陳惠枝	2019/11/29
ANGLES	X° ± 3°		SCALE	SHEET
			1/1	1/1
			REV.	B

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Standard Connectors](#) category:*

*Click to view products by [Nextronics](#) manufacturer:*

Other Similar products are found below :

[56F711-015](#) [LV242999-142T12](#) [015-0339-000](#) [015-0341-000](#) [015-0349-000](#) [015-0350-000](#) [015-0372-008](#) [015-8544-011](#) [017041-0005](#)  
[020419-0104](#) [012-0467-000](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [609-9P](#) [M24308/2-23Z](#) [M24308/2-36Z](#) [CT0-24-10SC](#) [CT06E20-22SS](#)  
[CT0P14S-5SXS](#) [CT0P22-14PS](#) [CT0U22-14PSA206F127](#) [CT1E20-19SS](#) [CT1E20-22SCAU-G9](#) [CT1LA20-22SS](#) [CT2-10SL-3SC](#) [CT2-10SL-](#)  
[4PH](#) [CT2-14S-2PCA34](#) [CT2-16S-17PS](#) [CT2-18-10PS-FMLB-D](#) [CT2-18-11PCAU](#) [CT2-18-1PSAUA34](#) [CT2-22-19SC](#) [CT2-22-19SS-A206](#)  
[CT2-24-2PS](#) [CT2-28-12SC](#) [CT2-28-12SSA232](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6-16-12SC](#) [CT6-18-10PSA206](#) [CT6-18-](#)  
[10PSA232](#) [CT6-18-10SSF127A206](#) [CT6-20-15SSA232](#) [CT6-22-10PS](#) [CT6-28-22SS](#) [CT6E14S-2S0](#) [CT6E14S-2SC-A206](#) [CT6E14S-5SC](#)