

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

LGZ

Snap-in Terminal Type, 105°C Long Life Assurance



NEW

- Long life product of LGR series.
- Contribute to longer life of equipment.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).


LGZ ← Long Life → **LGR**





■ Specifications

Item	Performance Characteristics		
Category Temperature Range	-25 to +105°C		
Rated Voltage Range	450V		
Rated Capacitance Range	82 to 330μF		
Capacitance Tolerance	±20% at 120Hz, 20°C		
Leakage Current	After 5 minutes' application of rated voltage at 20°C, leakage current is not more than $3\sqrt{CV}(\mu A)$ or 5 mA, whichever is smaller (at 20°C) [C : Rated Capacitance (μF), V : Voltage (V)]		
Tangent of loss angle (tan δ)	0.20MAX. 120Hz at 20°C		
Stability at Low Temperature	Rated voltage (V)	450	
	Impedance ratio ZT/Z20(MAX.)	Z -25°C / Z+20°C 8	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 20000 hours at 105°C, the peak voltage shall not exceed the rated voltage.	Capacitance change	Within ±25% of the initial capacitance value
		tan δ	250% or less than the initial specified value
		Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right.	Capacitance change	Within ±15% of the initial capacitance value
		tan δ	150% or less than the initial specified value
		Leakage current	Less than or equal to the initial specified value
Marking	Printed with white color letter on black sleeve.		

■ Drawing

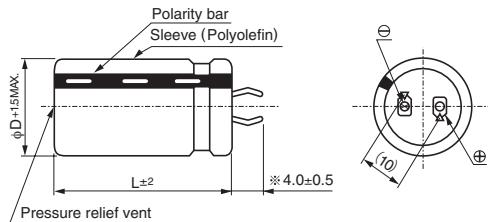

Type numbering system (Example : 450V 82μF)

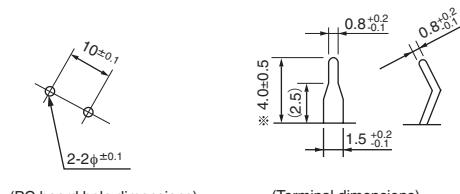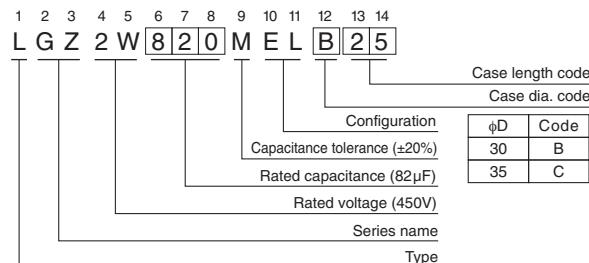

(PC board hole dimensions)

(Terminal dimensions)

* The other terminal is also available upon request.
Please refer page 346 for schematic of dimensions.

■ Dimensions

450V (2W)				
Cap. (μF)	Size φD × L(mm)	Rated ripple (mArms)	Leakage Current (mA)	Code
82	30 × 25	560	0.57	LGZ2W820MELB25
100	30 × 30	640	0.63	LGZ2W101MELB30
120	30 × 35	720	0.69	LGZ2W121MELB35
	35 × 25	720	0.69	LGZ2W121MELC25
150	30 × 40	790	0.77	LGZ2W151MELB40
	35 × 30	790	0.77	LGZ2W151MELC30
180	30 × 45	870	0.85	LGZ2W181MELB45
	35 × 35	870	0.85	LGZ2W181MELC35
220	30 × 50	1000	0.94	LGZ2W221MELB50
	35 × 40	1000	0.94	LGZ2W221MELC40
270	35 × 45	1190	1.04	LGZ2W271MELC45
330	35 × 50	1380	1.15	LGZ2W331MELC50

Rated ripple current (mArms) at 105°C 120Hz

● Frequency coefficient of rated ripple current

Frequency (Hz)	50	60	120	300	1 k	10k	50k or more
Coefficient	0.77	0.82	1.00	1.16	1.30	1.41	1.43

Minimum order quantity : 50pcs.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Snap In category:

Click to view products by Nichicon manufacturer:

Other Similar products are found below :

[NRLF103M25V35X20F](#) [EET-XB2W221LA](#) [419-2066-400](#) [B41231C4229M](#) [B43508C5337M062](#) [MAL215969181E3](#)
[383LX332M250N082V](#) [LGZ2W101MELB30](#) [LGZ2W151MELB40](#) [LGZ2W271MELC45](#) [LGZ2W221MELC40](#) [LGZ2W331MELC50](#)
[LGZ2W121MELC25](#) [HFE102M35070FVA](#) [KN821M40035x50A](#) [EHP337M2DO25SW](#) [EKMM451VSN471MA45S](#)
[EKMW451VSN331MR30S](#) [ELXS601VSN121MA30S](#) [ESMH101VNN682MA50U](#) [KN471M20022*36A](#) [ELH2GM221P30KT](#)
[CK221MOH40B](#) [CK103MGI45B](#) [CL221KPI30B](#) [CL271MPI40B](#) [CL471MVJ50B](#) [EKMR451VSN471MA35S](#) [EKMR451VSN151MP35S](#)
[ELXS421VSN221MP45S](#) [KN331M40030*35A](#) [ELG229M016AS3AA](#) [B43541A6397M000](#) [B43541B6227M000](#) [B43544A7227M000](#)
[B43544C6227M000](#) [B43630B5477M067](#) [B43630F2827M000](#) [B43640E9477M000](#) [B43644J6477M000](#) [MAL215757331E3](#)
[MAL229956561E3](#) [MAL229966182E3](#) [MAL229967471E3](#) [MAL229967821E3](#) [ALC70A821EF400](#) [ALC70A102EH400](#) [MAL205658102E3](#)
[MAL205855103E3](#) [MAL209436471E3](#)