

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UCN

Chip Type, High Reliability.
Low ESR, Long Life Assurance.



For SMD




Long Life

NEW

- Chip type, low temperature ESR/Long life products.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.

UCN ← Long Life **UCH**

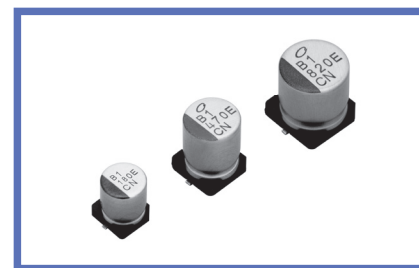


Specifications

Item	Performance Characteristics				
Category Temperature Range	-40 to +125°C				
Rated Voltage Range	25 to 35V				
Rated Capacitance Range	150 to 820μF				
Capacitance Tolerance	±20% at 120Hz, 20°C				
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV (μA). After 5 minutes' application of 16V at 20°C, leakage current is not more than 0.001CV (μA).				
Tangent of loss angle (tan δ)	Rated voltage (V)	25	35	Measurement frequency : 120Hz at 20°C	
	tan δ (max.)	0.18	0.16		
Stability at Low Temperature	Rated voltage (V)		25	35	Measurement frequency : 120Hz
	Impedance ratio ZT / Z20 (max.)	Z(-40°C) / Z(+20°C)	3	3	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 3000 hours at 125°C.			Capacitance change	Within ±30% of the initial capacitance value
				tan δ	300% or less than the initial specified value
				Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 125°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.				
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.			Capacitance change	Within ±10% of the initial capacitance value
				tan δ	Less than or equal to the initial specified value
				Leakage current	Less than or equal to the initial specified value
Marking	Black print on the case top.				


※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

Chip Type


(φ6.3)

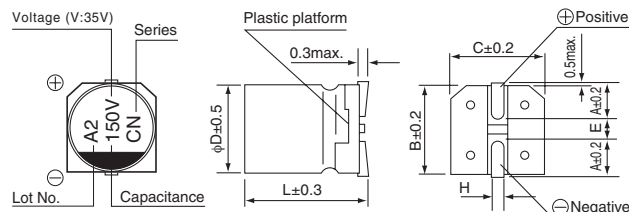

(φ8, φ10)

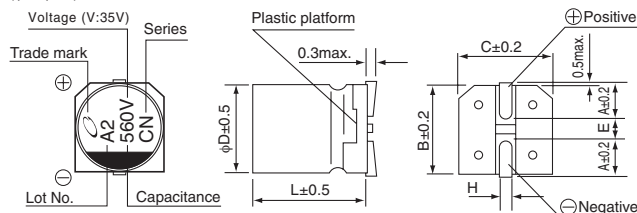

Type numbering system (Example : 35V 150μF)

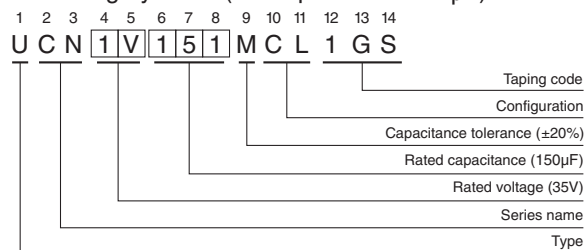

Voltage			(mm)		
V	25	35	φ6.3	8×10	10×10
Code	E	V	A	B	C
			2.4	2.9	3.2
			6.6	8.3	10.3
			6.6	8.3	10.3
			2.2	3.1	4.5
			7.7	10	10
			0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Frequency coefficient of rated ripple current

Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

• Dimension table in next page.

CAT.81000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD](#) ***category:***

Click to view products by [Nichicon](#) ***manufacturer:***

Other Similar products are found below :

[ULV2H1R8MNL1GS](#) [EMZA500ARA221MJA0G](#) [UCX1V471MNQ1MS](#) [10SVP120M](#) [DV100M050C055ETR](#) [AEH1012471M016R](#)
[EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMK1AM102GB0D00R](#) [DV221M025E077ETR](#) [CK1E100M0405](#) [GVM1E331M0607](#)
[VT10UF100V167RV0127](#) [VT100UF16V167RV0124](#) [CS100UF35V167RV0155](#) [VT22UF35V167RV0131](#) [CS470UF10V167RV0150](#)
[CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#) [RVT330UF25V167RV0055](#) [126RV0017](#) [VT47UF35V167RV0137](#)
[VT220UF16V167RV0088](#) [126RV0012](#) [126RV0011](#) [126RV0015](#) [126RV0021](#) [126RV0006](#) [126RV0007](#) [126RV0019](#) [126RV0005](#)
[VT100UF10V167RV0123](#) [CS100UF25V167RV0154](#) [CS100UF50V167RV0146](#) [CS220UF10V167RV0157](#) [CS47UF50V167RV0158](#)
[CK100UF25V167RV0139](#) [CS100UF16V167RV0145](#) [CS220UF16V167RV0147](#) [RVT330UF50V167RV085](#) [CK100UF35V167RV0140](#)
[RV102M010G105ETR](#) [CK1E4R7M0405](#) [VT470UF10V167RV0134](#) [CK0J101M0605](#) [CK0J221M0605](#) [EMK2GM2R2EB0D00R](#)
[RVT1A330M0405](#) [CK1C221M0607](#) [RVE1V100M0405](#)