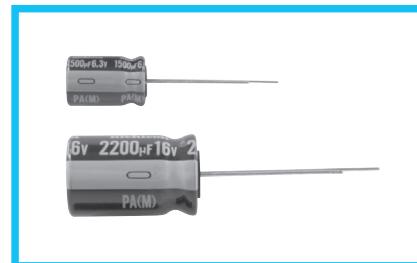


**UPA**

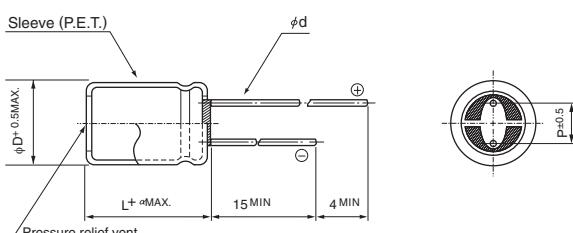
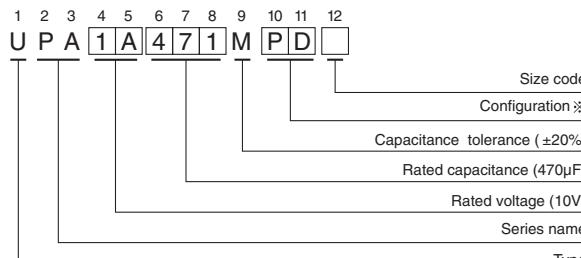
Miniature Sized, Low Impedance,  
High Reliability For  
Switching Power Supplies



- Lower impedance than UPW.
- Smaller case size and high ripple current.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

**■ Specifications**

Item	Performance Characteristics										
Category Temperature Range	-55 to +105°C										
Rated Voltage Range	6.3 to 35V										
Rated Capacitance Range	180 to 10000μF										
Capacitance Tolerance	±20% at 120Hz, 20°C										
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.										
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35					
	tan δ (MAX.)	0.22	0.19	0.16	0.14	0.12					
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF.											
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35					
	Impedance ratio (MAX.) Z-55°C / Z+20°C	3	3	3	3	3					
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 5000 hours (3000 hours for φD=8, 4000 hours for φD=10) at 105°C, the peak voltage shall not exceed the rated voltage.										
	Capacitance change	Within ±20% of the initial capacitance value (6.3V, 10V : ±30%)									
	tan δ	200% or less than the initial specified value (6.3V, 10V : 300%)									
Shelf Life	Leakage current	Less than or equal to the initial specified value									
	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										
	Marking										
Printed with white color letter on dark brown sleeve.											

**■ Radial Lead Type****Type numbering system (Example : 10V 470μF)**

## ※ Configuration

φD	Pb-free leadwire Pb-free PET sleeve
8-10	PD
12.5 to 18	HD

※ : In case L > 25 for the φ12.5 dia. unit, lead dia. φ d = 0.8mm.

α	(L < 20) 1.5	(L ≥ 20) 2.0
P	3.5	5.0
φd	0.6	0.6

φD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	*0.6	0.8	0.8

• Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

**● Frequency coefficient of rated ripple current**

Cap. (μF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
180 to 330	0.55	0.65	0.75	0.85	1.00	
390 to 1000	0.70	0.75	0.80	0.90	1.00	
1200 to 10000	0.80	0.85	0.90	0.95	1.00	

## UPA

## ■ Dimensions

Cap.(μF)	Code	Item	V (Code)	6.3 (0J)			10 (1A)			16 (1C)				
			Case size ΦD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size ΦD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size ΦD × L (mm)	Impedance (Ω) MAX.		
				20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
330	331										8 × 11.5	0.090	0.180	630
390	391										8 × 11.5	0.090	0.180	630
470	471						8 × 11.5	0.090	0.180	630	10 × 12.5	0.063	0.126	900
560	561	8 × 11.5	0.090	0.180	630	8 × 11.5	0.090	0.180	630		8 × 15	0.062	0.124	860
680	681	8 × 11.5	0.090	0.180	630					▲10 × 12.5	0.063	0.126	900	
820	821					8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220	
						▲10 × 12.5	0.063	0.126	900	▲10 × 16	0.049	0.098	1240	
1000	102	8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220	10 × 16	0.049	0.098	1240	
		▲10 × 12.5	0.063	0.126	900	▲10 × 12.5	0.063	0.126	900	●10 × 16	0.049	0.098	1240	
		●10 × 16	0.049	0.098	1240	●10 × 16	0.049	0.098	1240	●10 × 20	0.035	0.070	1490	
1200	122	10 × 12.5	0.063	0.126	900	8 × 20	0.044	0.088	1220	10 × 20	0.035	0.070	1490	
		●10 × 16	0.049	0.098	1240	▲10 × 16	0.049	0.098	1240					
1500	152	8 × 20	0.044	0.088	1220					10 × 20	0.035	0.070	1490	
		▲10 × 16	0.049	0.098	1240					10 × 25	0.033	0.066	1680	
		●10 × 20	0.035	0.070	1490									
1800	182					10 × 20	0.035	0.070	1490					
						▲10 × 25	0.033	0.066	1680					
2200	222	10 × 20	0.035	0.070	1490	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890	
		●10 × 25	0.033	0.066	1680	●12.5 × 20	0.029	0.058	1890	●12.5 × 25	0.022	0.044	2280	
2700	272	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280	
3300	332	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280	12.5 × 31.5	0.018	0.036	2720	
3900	392	12.5 × 25	0.022	0.044	2280	12.5 × 25	0.022	0.044	2280	●16 × 20	0.026	0.052	2330	
4700	472	12.5 × 25	0.022	0.044	2280	12.5 × 31.5	0.018	0.036	2720	12.5 × 35.5	0.016	0.032	2940	
		12.5 × 31.5	0.018	0.036	2720	▲16 × 20	0.026	0.052	2330	16 × 25	0.019	0.038	2760	
5600	562	12.5 × 31.5	0.018	0.036	2720	12.5 × 35.5	0.016	0.032	2940	16 × 31.5	0.017	0.035	2810	
		▲16 × 20	0.026	0.052	2330	▲18 × 25	0.018	0.036		▲18 × 25	0.018	0.036	2850	
6800	682	12.5 × 35.5	0.016	0.032	2940	16 × 25	0.019	0.038	2760	18 × 25	0.018	0.036	2850	
8200	822	16 × 25	0.019	0.038	2760	16 × 31.5	0.017	0.034	2810					
		▲18 × 20	0.025	0.050	2640	▲18 × 25	0.018	0.036	2850					
10000	103	16 × 31.5	0.017	0.034	2810									
		▲18 × 25	0.018	0.036	2850									

Cap.(μF)	Code	Item	V (Code)	25 (1E)			35 (1V)					
			Case size ΦD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size ΦD × L (mm)	Impedance (Ω) MAX.				
				20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz			
180	181						8 × 11.5	0.090	0.180	630		
270	271	8 × 11.5	0.090	0.180	630		8 × 15	0.062	0.124	860		
330	331	8 × 11.5	0.090	0.180	630		▲10 × 12.5	0.063	0.126	900		
390	391	8 × 15	0.062	0.124	860	8 × 20	0.044	0.088	1220			
470	471	8 × 15	0.062	0.124	860	▲10 × 16	0.049	0.098	1240			
560	561	8 × 20	0.044	0.088	1220	10 × 20	0.035	0.070	1490			
680	681	10 × 16	0.049	0.098	1240	10 × 25	0.033	0.066	1680			
820	821	10 × 20	0.035	0.070	1490	12.5 × 20	0.029	0.058	1890			
1000	102	10 × 25	0.033	0.066	1680	12.5 × 20	0.029	0.058	1890			
		●12.5 × 20	0.029	0.058	1890							
1200	122	12.5 × 20	0.029	0.058	1890	12.5 × 25	0.022	0.044	2280			
1500	152					12.5 × 31.5	0.018	0.036	2720			
						▲16 × 20	0.026	0.052	2330			
1800	182	12.5 × 25	0.022	0.044	2280	12.5 × 35.5	0.016	0.032	2940			
						▲16 × 20	0.026	0.052	2330			
2200	222	12.5 × 31.5	0.018	0.036	2720	16 × 25	0.019	0.038	2760			
		▲16 × 20	0.026	0.052	2330	▲18 × 20	0.025	0.050	2640			
2700	272	12.5 × 35.5	0.016	0.032	2940	16 × 31.5	0.017	0.035	2810			
		▲18 × 25	0.018	0.036	2850	▲18 × 25	0.018	0.036	2850			
3300	332	16 × 25	0.019	0.038	2760	18 × 31.5	0.016	0.032	2910			
		▲18 × 20	0.025	0.050	2640							
4700	472	18 × 25	0.018	0.036	2850							

▲: In this case, [6] will be put at 12th digit of type numbering system.

●: In this case, [3] will be put at 12th digit of type numbering system.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#)  
[B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#)  
[EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#)  
[ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [36DA273F050BB2A](#)  
[KME25VB100M-6.3X11](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#)  
[MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#)  
[EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [RGA221M1HBK-1016G](#) [NXH 35V1800 16x20](#)  
[EWH2DM471M40OT](#) [LKFB41E470MF](#) [LKMJ3551H332MF](#) [LKMJ2002E151MF](#) [LKMJ2502G820MF](#) [LKML3502A331MF](#)  
[LKMB0901J180MF](#) [LKMB0901J2R2MF](#)