


KY Series

- Newly innovative electrolyte is employed to minimize ESR
- Endurance with ripple current : 4,000 to 10,000 hours at 105°C
- Non solvent resistant type
- RoHS2 Compliant




SPECIFICATIONS

Items	Characteristics										
Category	-40 to +105℃										
Temperature Range											
Rated Voltage Range	6.3 to 100V _{dc}										
Capacitance Tolerance	± 20% (M) (at 20℃, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20℃ after 2 minutes)										
Dissipation Factor (tan δ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	
	tan δ (Max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08	
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20℃, 120Hz)										
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	80V	100V	
	Z(-25℃)/Z(+20℃)	4	3	2	2	2	2	2	2	2	
	Z(-40℃)/Z(+20℃)	8	6	4	3	3	3	3	3	3	(at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for the specified period of time at 105℃.										
	Time	6.3 to 10V _{dc}	φ 5 & 6.3 : 4,000hours			φ 8 & 10 : 6,000hours			φ 12.5 to 18 : 8,000hours		
		16 to 100V _{dc}	φ 5 & 6.3 : 5,000hours			φ 8 & 10 : 7,000hours			φ 12.5 to 18 : 10,000hours		
	Capacitance change		≤ ± 25% of the initial value								
	D.F. (tan δ)		≤ 200% of the initial specified value								
	Leakage current		≤ The initial specified value								
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 500 hours at 105℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
	Capacitance change		≤ ± 25% of the initial value								
	D.F. (tan δ)		≤ 200% of the initial specified value								
	Leakage current		≤ The initial specified value								


DIMENSIONS [mm]

- Terminal Code : E

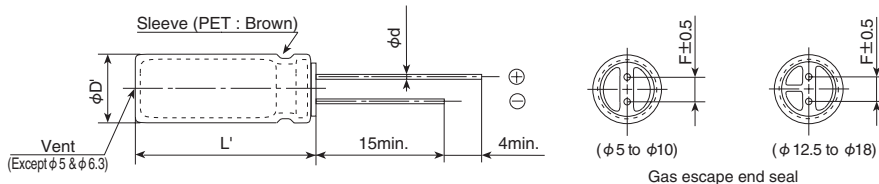

φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φD'	φD+0.5max.						
L'	L+1.5max.						

PART NUMBERING SYSTEM

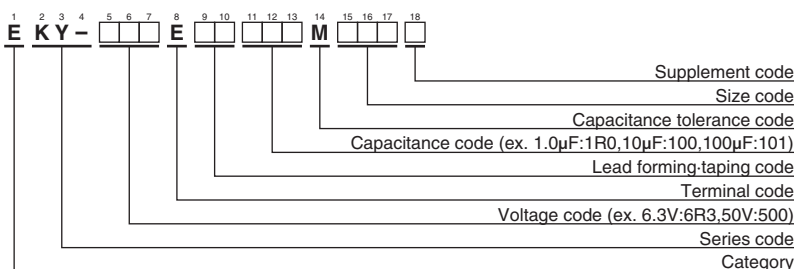

Please refer to "Product code guide (radial lead type)"

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA rms/ 105°C, 100kHz)	Part No.
			20°C	-10°C		
6.3	150	5×11	0.58	2.3	210	EKY-6R3E□□151ME11D
	330	6.3×11	0.22	0.87	340	EKY-6R3E□□331MF11D
	680	8×11.5	0.13	0.52	640	EKY-6R3E□□681MHB5D
	820	10×12.5	0.080	0.32	865	EKY-6R3E□□821MJC5S
	1,000	8×15	0.087	0.35	840	EKY-6R3E□□102MH15D
	1,200	8×20	0.069	0.27	1,050	EKY-6R3E□□122MH20D
	1,200	10×16	0.060	0.24	1,210	EKY-6R3E□□122MJ16S
	1,500	10×20	0.046	0.18	1,400	EKY-6R3E□□152MJ20S
	1,800	12.5×15	0.049	0.16	1,450	EKY-6R3E□□182MK15S
	2,200	10×25	0.042	0.17	1,650	EKY-6R3E□□222MJ25S
	2,700	10×30	0.031	0.12	1,910	EKY-6R3E□□272MJ30S
	2,700	16×15	0.042	0.12	1,940	EKY-6R3E□□272ML15S
	3,300	12.5×20	0.035	0.12	1,900	EKY-6R3E□□332MK20S
	3,900	12.5×25	0.027	0.089	2,230	EKY-6R3E□□392MK25S
	3,900	18×15	0.043	0.11	2,210	EKY-6R3E□□392MM15S
	4,700	12.5×30	0.024	0.078	2,650	EKY-6R3E□□472MK30S
	5,600	12.5×35	0.020	0.065	2,880	EKY-6R3E□□562MK35S
	5,600	16×20	0.027	0.078	2,530	EKY-6R3E□□562ML20S
	6,800	12.5×40	0.017	0.056	3,350	EKY-6R3E□□682MK40S
	6,800	16×25	0.021	0.060	2,930	EKY-6R3E□□682ML25S
	6,800	18×20	0.026	0.067	2,860	EKY-6R3E□□682MM20S
8,200	16×31.5	0.017	0.050	3,450	EKY-6R3E□□822MLN3S	
10,000	16×35.5	0.015	0.044	3,610	EKY-6R3E□□103MLP1S	
10,000	18×25	0.019	0.049	3,140	EKY-6R3E□□103MM25S	
12,000	16×40	0.013	0.038	4,080	EKY-6R3E□□123ML40S	
12,000	18×31.5	0.015	0.040	4,170	EKY-6R3E□□123MMN3S	
15,000	18×35.5	0.014	0.038	4,220	EKY-6R3E□□153MMP1S	
18,000	18×40	0.012	0.032	4,280	EKY-6R3E□□183MM40S	
10	100	5×11	0.58	2.3	210	EKY-100E□□101ME11D
	220	6.3×11	0.22	0.87	340	EKY-100E□□221MF11D
	470	8×11.5	0.13	0.52	640	EKY-100E□□471MHB5D
	680	8×15	0.087	0.35	840	EKY-100E□□681MH15D
	680	10×12.5	0.080	0.32	865	EKY-100E□□681MJC5S
	1,000	8×20	0.069	0.27	1,050	EKY-100E□□102MH20D
	1,000	10×16	0.060	0.24	1,210	EKY-100E□□102MJ16S
	1,200	10×20	0.046	0.18	1,400	EKY-100E□□122MJ20S
	1,500	10×25	0.042	0.17	1,650	EKY-100E□□152MJ25S
	1,500	12.5×15	0.049	0.16	1,450	EKY-100E□□152MK15S
	2,200	10×30	0.031	0.12	1,910	EKY-100E□□222MJ30S
	2,200	12.5×20	0.035	0.12	1,900	EKY-100E□□222MK20S
	2,200	16×15	0.042	0.12	1,940	EKY-100E□□222ML15S
	2,700	18×15	0.043	0.11	2,210	EKY-100E□□272MM15S
	3,300	12.5×25	0.027	0.089	2,230	EKY-100E□□332MK25S
	3,900	12.5×30	0.024	0.078	2,650	EKY-100E□□392MK30S
	3,900	16×20	0.027	0.078	2,530	EKY-100E□□392ML20S
	4,700	12.5×35	0.020	0.065	2,880	EKY-100E□□472MK35S
	5,600	12.5×40	0.017	0.056	3,350	EKY-100E□□562MK40S
	5,600	16×25	0.021	0.060	2,930	EKY-100E□□562ML25S
	5,600	18×20	0.026	0.067	2,860	EKY-100E□□562MM20S
6,800	16×31.5	0.017	0.050	3,450	EKY-100E□□682MLN3S	
6,800	18×25	0.019	0.049	3,140	EKY-100E□□682MM25S	
8,200	16×35.5	0.015	0.044	3,610	EKY-100E□□822MLP1S	
8,200	18×31.5	0.015	0.040	4,170	EKY-100E□□822MMN3S	
10,000	16×40	0.013	0.038	4,080	EKY-100E□□103ML40S	
10,000	18×35.5	0.014	0.038	4,220	EKY-100E□□103MMP1S	
12,000	18×40	0.012	0.032	4,280	EKY-100E□□123MM40S	
16	56	5×11	0.58	2.3	210	EKY-160E□□560ME11D
	120	6.3×11	0.22	0.87	340	EKY-160E□□121MF11D
	330	8×11.5	0.13	0.52	640	EKY-160E□□331MHB5D
	470	8×15	0.087	0.35	840	EKY-160E□□471MH15D
	470	10×12.5	0.080	0.32	865	EKY-160E□□471MJC5S
	680	8×20	0.069	0.27	1,050	EKY-160E□□681MH20D
	680	10×16	0.060	0.24	1,210	EKY-160E□□681MJ16S
	1,000	10×20	0.046	0.18	1,400	EKY-160E□□102MJ20S
	1,000	12.5×15	0.049	0.16	1,450	EKY-160E□□102MK15S
	1,200	10×25	0.042	0.17	1,650	EKY-160E□□122MJ25S
	1,500	10×30	0.031	0.12	1,910	EKY-160E□□152MJ30S
	1,500	12.5×20	0.035	0.12	1,900	EKY-160E□□152MK20S
	1,500	16×15	0.042	0.12	1,940	EKY-160E□□152ML15S
	1,500	18×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	20×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	25×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	30×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	35×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	40×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	45×15	0.043	0.11	2,210	EKY-160E□□152MM15S
	1,500	50×15	0.043	0.11	2,210	EKY-160E□□152MM15S
1,500	55×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	60×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	65×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	70×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	75×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	80×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	85×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	90×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	95×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	100×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	105×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	110×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	115×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	120×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	125×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	130×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	135×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	140×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	145×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	150×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	155×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	160×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	165×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	170×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	175×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	180×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	185×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	190×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	195×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	200×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	205×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	210×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	215×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	220×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	225×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	230×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	235×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	240×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	245×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	250×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	255×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	260×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	265×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	270×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	275×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	280×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	285×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	290×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	295×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	300×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	305×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	310×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	315×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	320×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	325×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	330×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	335×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	340×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	345×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	350×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	355×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	360×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	365×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	370×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	375×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	380×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	385×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	390×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	395×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	400×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	405×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	410×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	415×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	420×15	0.043	0.11	2,210	EKY-160E□□152MM15S	
1,500	425×15	0.043	0.11	2,210	EKY-160E□□152MM1	

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	Impedance (Ω max./100kHz)		Rated ripple current (mA rms/ 105°C, 100kHz)	Part No.
			20°C	-10°C		
35	2,200	18×25	0.019	0.049	3,140	EKY-350E□□222MM2S
	2,700	16×35.5	0.015	0.044	3,610	EKY-350E□□272MLP1S
	2,700	18×31.5	0.015	0.040	4,170	EKY-350E□□272MMN3S
	3,300	16×40	0.013	0.038	4,080	EKY-350E□□332ML40S
	3,300	18×35.5	0.014	0.038	4,220	EKY-350E□□332MMP1S
	3,900	18×40	0.012	0.032	4,280	EKY-350E□□392MM40S
50	1.0	5×11	4.0	16.0	30	EKY-500E□□1R0ME11D
	2.2	5×11	2.5	10.0	43	EKY-500E□□2R2ME11D
	3.3	5×11	2.2	8.8	53	EKY-500E□□3R3ME11D
	4.7	5×11	1.9	7.6	88	EKY-500E□□4R7ME11D
	10	5×11	1.5	6.0	100	EKY-500E□□100ME11D
	22	5×11	0.70	2.8	180	EKY-500E□□220ME11D
	56	6.3×11	0.30	1.2	295	EKY-500E□□560MF11D
	100	8×11.5	0.17	0.68	555	EKY-500E□□101MHB5D
	120	8×15	0.12	0.48	730	EKY-500E□□121MH15D
	150	10×12.5	0.12	0.48	760	EKY-500E□□151MJC5S
	180	8×20	0.091	0.36	910	EKY-500E□□181MH20D
	220	10×16	0.084	0.34	1,050	EKY-500E□□221MJ16S
	270	10×20	0.060	0.24	1,220	EKY-500E□□271MJ20S
	270	12.5×15	0.061	0.20	1,260	EKY-500E□□271MK15S
	330	10×25	0.055	0.22	1,440	EKY-500E□□331MJ25S
	470	10×30	0.043	0.17	1,690	EKY-500E□□471MJ30S
	470	12.5×20	0.045	0.15	1,660	EKY-500E□□471MK20S
	470	16×15	0.055	0.17	1,690	EKY-500E□□471ML15S
	560	12.5×25	0.034	0.11	1,950	EKY-500E□□561MK25S
	560	18×15	0.054	0.15	1,930	EKY-500E□□561MM15S
	680	12.5×30	0.030	0.10	2,310	EKY-500E□□681MK30S
	820	12.5×35	0.025	0.083	2,510	EKY-500E□□821MK35S
	820	16×20	0.034	0.10	2,210	EKY-500E□□821ML20S
	1,000	12.5×40	0.021	0.069	2,920	EKY-500E□□102MK40S
	1,000	16×25	0.025	0.075	2,555	EKY-500E□□102ML25S
	1,000	18×20	0.036	0.097	2,490	EKY-500E□□102MM20S
63	1,200	16×31.5	0.022	0.066	3,010	EKY-500E□□122MLN3S
	1,200	18×25	0.026	0.070	2,740	EKY-500E□□122MM2S
	1,500	16×35.5	0.019	0.057	3,150	EKY-500E□□152MLP1S
	1,800	16×40	0.016	0.048	3,710	EKY-500E□□182ML40S
	1,800	18×31.5	0.021	0.057	3,635	EKY-500E□□182MMN3S
	2,200	18×35.5	0.017	0.046	3,680	EKY-500E□□222MMP1S
	2,700	18×40	0.014	0.038	3,800	EKY-500E□□272MM40S
	15	5×11	0.88	3.5	165	EKY-630E□□150ME11D
	33	6.3×11	0.35	1.4	265	EKY-630E□□330MF11D
	56	8×11.5	0.22	0.88	500	EKY-630E□□560MHB5D
	82	8×15	0.16	0.64	665	EKY-630E□□820MH15D
	82	10×12.5	0.11	0.44	690	EKY-630E□□820MJC5S
63	120	8×20	0.12	0.48	820	EKY-630E□□121MH20D
	120	10×16	0.076	0.31	950	EKY-630E□□121MJ16S
	180	10×20	0.056	0.23	1,150	EKY-630E□□181MJ20S
	180	12.5×16	0.072	0.29	1,150	EKY-630E□□181MK16S
	220	10×25	0.046	0.19	1,350	EKY-630E□□221MJ25S
	270	12.5×20	0.041	0.13	1,500	EKY-630E□□271MK20S
	390	12.5×25	0.031	0.093	1,900	EKY-630E□□391MK25S
	470	12.5×30	0.028	0.084	2,300	EKY-630E□□471MK30S
	470	16×20	0.032	0.096	2,000	EKY-630E□□471ML20S
	560	12.5×35	0.024	0.072	2,500	EKY-630E□□561MK35S
	680	12.5×40	0.021	0.063	2,800	EKY-630E□□681MK40S
	680	12.5×40	0.021	0.063	2,800	EKY-630E□□681MK40S
63	680	16×25	0.025	0.075	2,600	EKY-630E□□681ML25S
	680	18×20	0.030	0.090	2,500	EKY-630E□□681MM20S
	820	16×31.5	0.021	0.063	2,850	EKY-630E□□821MLN3S
	820	18×25	0.024	0.072	2,800	EKY-630E□□821MM25S
	1,000	16×35.5	0.019	0.057	2,900	EKY-630E□□102MLP1S
	1,200	16×40	0.018	0.054	3,400	EKY-630E□□122ML40S
	1,200	18×31.5	0.020	0.060	3,300	EKY-630E□□122MMN3S
	1,500	18×35.5	0.018	0.054	3,400	EKY-630E□□152MMP1S
	1,800	18×40	0.017	0.051	3,500	EKY-630E□□182MM40S
	68	10×12.5	0.17	0.66	480	EKY-800E□□680MJC5S
	100	10×16	0.11	0.47	600	EKY-800E□□101MJ16S
	120	10×20	0.084	0.34	800	EKY-800E□□121MJ20S
80	150	10×25	0.069	0.28	900	EKY-800E□□151MJ25S
	150	12.5×16	0.11	0.34	750	EKY-800E□□151MK16S
	220	12.5×20	0.062	0.18	1,100	EKY-800E□□221MK20S
	330	12.5×25	0.047	0.14	1,250	EKY-800E□□331MK25S
	330	16×20	0.048	0.15	1,350	EKY-800E□□331ML20S
	390	12.5×30	0.042	0.13	1,500	EKY-800E□□391MK30S
	470	12.5×35	0.036	0.11	1,650	EKY-800E□□471MK35S
	470	16×25	0.038	0.12	1,700	EKY-800E□□471ML25S
	470	18×20	0.045	0.14	1,500	EKY-800E□□471MM20S
	560	12.5×40	0.032	0.095	1,800	EKY-800E□□561MK40S
	680	16×31.5	0.032	0.095	1,850	EKY-800E□□681MLN3S
	680	18×25	0.036	0.11	1,750	EKY-800E□□681MM25S
80	820	16×35.5	0.029	0.086	2,000	EKY-800E□□821MLP1S
	820	18×31.5	0.030	0.090	1,900	EKY-800E□□821MMN3S
	1,000	16×40	0.027	0.081	2,200	EKY-800E□□102ML40S
	1,000	18×35.5	0.027	0.081	2,200	EKY-800E□□102MMP1S
	1,200	18×40	0.026	0.077	2,700	EKY-800E□□122MM40S
	6.8	5×11	1.4	5.6	125	EKY-101E□□6R8ME11D
	15	6.3×11	0.57	2.3	205	EKY-101E□□150MF11D
	27	8×11.5	0.36	1.4	355	EKY-101E□□270MHB5D
	39	8×15	0.25	1.0	450	EKY-101E□□390MH15D
	47	10×12.5	0.17	0.66	480	EKY-101E□□470MJC5S
	56	8×20	0.19	0.76	565	EKY-101E□□560MH20D
	68	10×16	0.11	0.47	600	EKY-101E□□680MJ16S
100	82	10×20	0.084	0.34	800	EKY-101E□□820MJ20S
	100	12.5×16	0.11	0.34	750	EKY-101E□□101MK16S
	120	10×25	0.069	0.28	900	EKY-101E□□121MJ25S
	150	12.5×20	0.062	0.18	1,100	EKY-101E□□151MK20S
	220	12.5×25	0.047	0.14	1,250	EKY-101E□□221MK25S
	220	16×20	0.048	0.15	1,350	EKY-101E□□221ML20S
	270	12.5×30	0.042	0.13	1,500	EKY-101E□□271MK30S
	330	12.5×35	0.036	0.11	1,650	EKY-101E□□331MK35S
	330	16×25	0.038	0.12	1,700	EKY-101E□□331ML25S
	330	18×20	0.045	0.14	1,500	EKY-101E□□331MM20S
	390	12.5×40	0.032	0.095	1,800	EKY-101E□□391MK40S
	470	16×31.5	0.032	0.095	1,850	EKY-101E□□471MLN3S
100	470	18×25	0.036	0.11	1,750	EKY-101E□□471MM25S
	560	16×35.5	0.029	0.086	2,000	EKY-101E□□561MLP1S
	560	18×31.5	0.030	0.090	1,900	EKY-101E□□561MMN3S
	680	16×40	0.027	0.081	2,200	EKY-101E□□681ML40S
	680	18×35.5	0.027	0.081	2,200	EKY-101E□□681MMP1S
	820	18×40	0.026	0.077	2,700	EKY-101E□□821MM40S

□ □ : Enter the appropriate lead forming or taping code.

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Capacitance(μF)	Frequency(Hz)	120	1k	10k	100k
1.0 to 180		0.40	0.75	0.90	1.00
220 to 560		0.50	0.85	0.94	1.00
680 to 1,800		0.60	0.87	0.95	1.00
2,200 to 3,900		0.75	0.90	0.95	1.00
4,700 to		0.85	0.95	0.98	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) **category:**

Click to view products by [Nippon Chemi-Con](#) **manufacturer:**

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-](#)
[6.3X11](#) [VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#)