



WILL ACCEPT 26-20 AWG WIRE

	DIMENSIONS							
No. OF PINS	Α	В	C	D	Е	F	G	н
9	1.213	0.984	0.642	0.311	0.236	0.756	0.496	0.427
	30.80	24.99	16.30	7.90	5.99	19.20	12.60	10.85
15	1.541	1.312	0.970	0.311	0.236	1.091	0.496	0.427
	39.15	33.32	24.65	7.90	5.99	27.70	12.60	10.85
25	2.083	1.852	1.512	0.311	0.236	1.630	0.496	0.427
	52.91	47.04	38.41	7.90	5.99	41.40	12.60	10.85





MATERIAL:

SHELL: STEEL, NICKEL OR TIN PLATED INSULATOR: UL 94V-O RATED PBT-WHITE

PROCESS TEMP.: 260° C

CONTACT: BRASS

SEALING MATERIAL: F04 FLEXABLE ADHESIVE

±0.015

ELECTRICAL:

CURRENT RATING: 5 AMPS CONTACT RESISTANCE: 15 mOhms Max. INSULATION RESISTANCE: 1,000 MOhms min. VOLTAGE: **500VAC FOR 1 MINUTE**

TEMPERATURE: -50° C TO 100° C

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION

DRAWN: DATE: C. SMITH 03-26-09 CHECKED: DATE:

MEETS IP67 STANDARDS

(SEE PAGE 2 FOR SEALING DETAILS)

NorComp


SCALE: SHEET OF REV 2 1:1


4

RoHS COMPLIANT

DWG NO. 772-EYY-20YRYY1

DESCRIPTION: IP67 - FEMALE - SOLDER CUP - MACHINED - ECONOMY - SEALING PROCESS




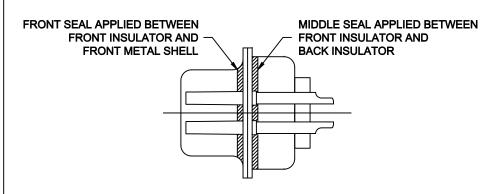

DETAIL A-A

HARDWARE OPTION

01X 0.065" (BOARD SIDE) - CN1



DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: DATE: 03-26-09
CHECKED: DATE:

NorComp

SCALE: SHEET OF REV 2.5:1 2 2 4

DWG NO. 772-EYY-20YRYY1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Standard Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below:

56F711-015 LV242999-142T12 015-0341-000 015-0372-005 015-0372-008 015-8755-001 020419-0104 012-0467-000 012-9507-034 012-9507-114 020745-0008 609-25P CT2-14S-2PCA34 CT2-18-11PCAU CT6-10SL-3SC CT6-10SL-4SC CT6-14S-2SC CT6E14SA7SC M83513/01-FC M83723/76W24619 L/C M85049/48-3-2F 6STD09PCM99B70X 6STD09SCM99B30X 6STD09SCT99S40X 6STD15PCT99S40X 6STD15SCM99B30X 6STD15SCT99S40X 6STF09PCM05B70X 7-135760-9 MC11E-10-6SN 747552-3 MD1-21PS MDM-15SCBRM7-F222 MDM96517-699 MDM96521-744 MDVB1-21SL1 MIK0-1-7SH003 MIKQ6-7SH076 MIKQ7-7PH077 MIKQ7-7PH11 MIKQ7-7PH32 MJSV-28SL61 MKJ4A1F14-55S 8-135760-3 8STD09PCM99B30X PG-KV/PV-16-GROM-SEALING GDA15P GDAY15PB 980-0000-170 980-0000-171