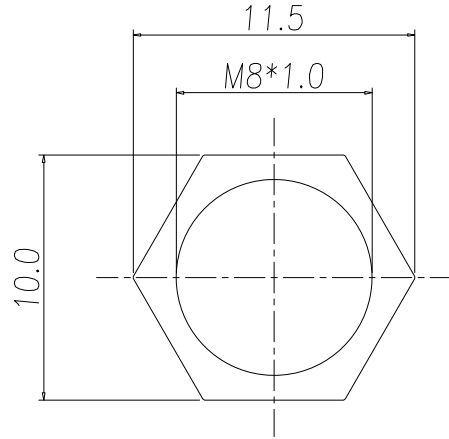
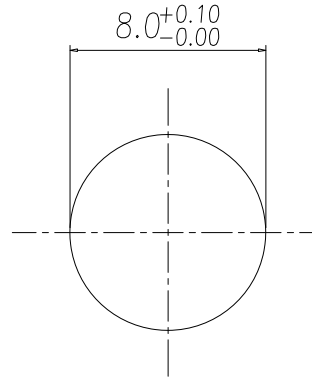


NUTRECOMMEND PANEL CUT-OUT

NOTE:

MATERIAL

HOUSING

PA, UL94V-0, BLACK

CONTACT

BRASS, 10u" GOLD

NUT

BRASS, NICKEL

SHELL

BRASS, NICKEL

O-RING

NBR

ELECTRICAL

RATED CURRENT

1.5A

VOLTAGE

30V

INSULATION RESISTANCE

100 MOhms MIN.

CONTACT RESISTANCE

10 mOhms MAX.

WATER PROOF

IP67

ENVIRONMENT

OPERATION TEMPERATURE

-40°C TO +85°C



ASSEMBLY

PANEL THICKNESS

1.5mm (min) & 2.0mm (max)

MAX WIRE AWG

24AWG

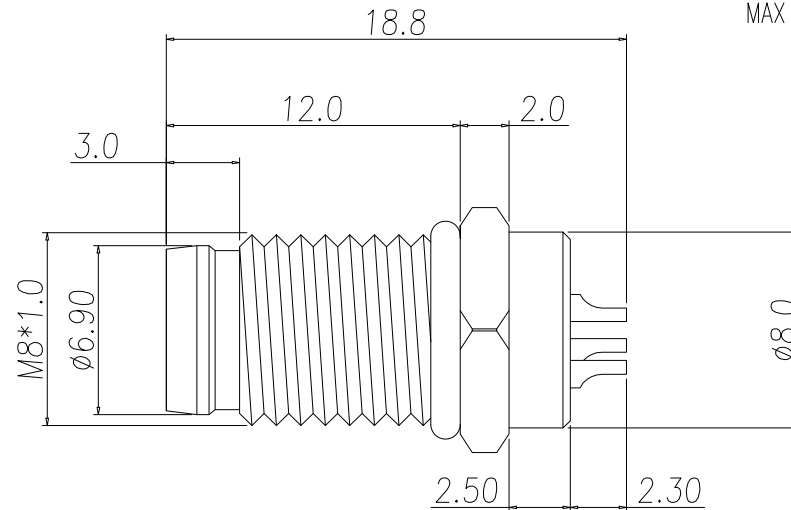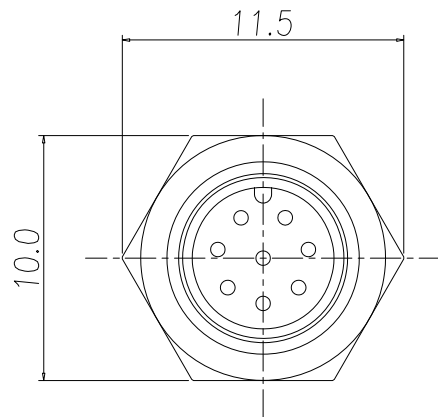

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

04/07/2021

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

2

DWG NO.

855-008-103R004

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [NorComp](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [6STD09SAM99B70X](#) [1-3637-600-5205](#) [1545399](#) [1R3006A20M005](#) [1R3006A20M030](#) [41-01016](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#) [1406328](#) [XS2R-D426-1](#) [XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#) [MA1LKE1700](#) [1400943](#) [1201010003](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [BEDC854NN0000052A000](#) [BKUA854NN0086155A000](#) [60.312.11](#) [1302010338](#) [BAE00010129](#) [1426186](#) [1612166](#) [1628138](#) [1597940](#) [1415374](#) [1413539](#) [1605969](#) [1416742](#) [7000-88601-0000000](#) [7000-P4421-0000000](#) [WY16K2BZM1](#) [SA1211/S2IB](#) [SA2010/P12IB](#) [SA2010/P2IS](#) [SA2010/P9IB](#) [SA2011/P2IB](#) [SA2013/S12B](#) [SA2013/S9B](#) [SA2810/P2IS](#) [SA610/S3B](#)