

NOTE:

MATERIAL

HOUSING:

PA66 UL94V-0, BLACK

CONTACT:

BRASS

NUT:

BRASS

SHELL:

BRASS

ORING:

EPDM

FINISH

CONTACT:

10μ" GOLD PLATED
OVER NICKEL

NUT:

NICKEL PLATED

SHELL:

NICKEL PLATED

ELECTRICAL

RATED CURRENT:

3A

RATED VOLTAGE:

60V

INSULATION RESISTANCE:

100 MΩhms MIN.

CONTACT RESISTANCE:

10 mΩhms MAX.




WATER PROOF:

IP67


ENVIRONMENT

OPERATION TEMPERATURE:


-40°C TO +85°C

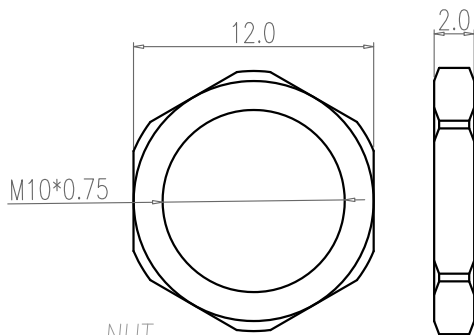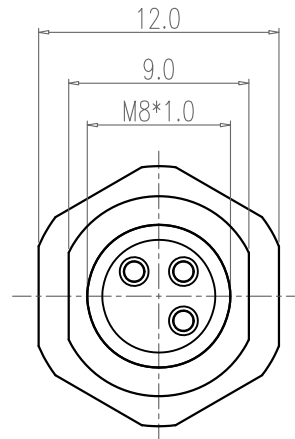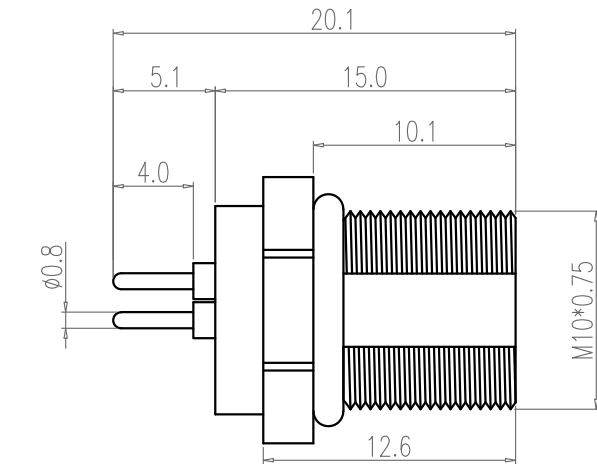

NUT

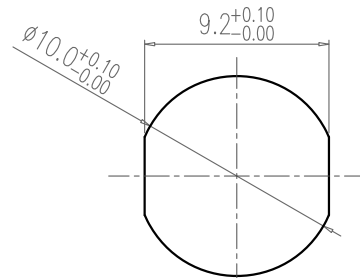

RECOMMEND PANEL CUT-OUT



RECOMMEND PCB LAYOUT

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

12/09/2020

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

1

OF

1

REV

1

DWG NO.

856-003-213R004

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [NorComp](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [8R5000A16M005](#) [1-3637-600-5205](#) [1545399](#) [1A4000-348](#) [8R5006A18A120](#) [1R3006A20M005](#) [1R3006A20M030](#) [RF-](#)
[12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [XS3P-M421-2](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [7A3006-32](#) [1R3004A20A1201](#) [N03FA03144](#) [1406328](#) [XS2RD4265](#) [080804EMF00000](#) [XS2R-D426-1](#)
[XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#) [MA1LKE1700](#) [1400943](#) [8R4006A16M020](#) [WR8U26E02C300](#)
[8R5000A16M020](#) [1R3000A20M050](#) [884A30K05M006](#) [1200910005](#) [1201010003](#) [2168083-2](#) [RC-Z2062](#) [SACC-MSQ-M12MS-25-3 2 SCO](#)
[SACC-E-FSB-5CON-M16/0 5 SC](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [SACC-1/2 NPT-LOCKNUT](#) [BEDC854NN0000052A000](#)
[BKUA854NN0086155A000](#) [T4145515021-002](#)