
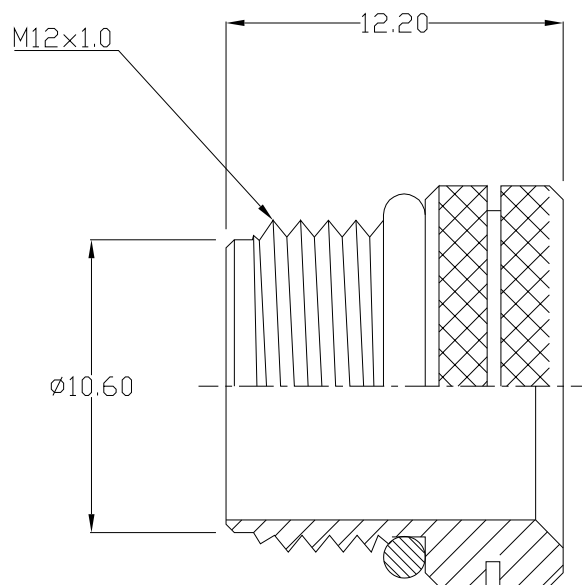
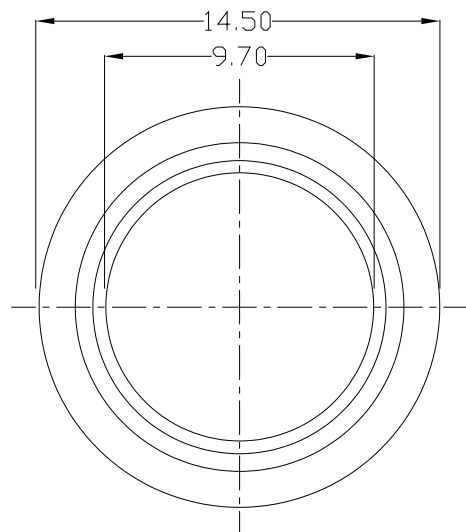
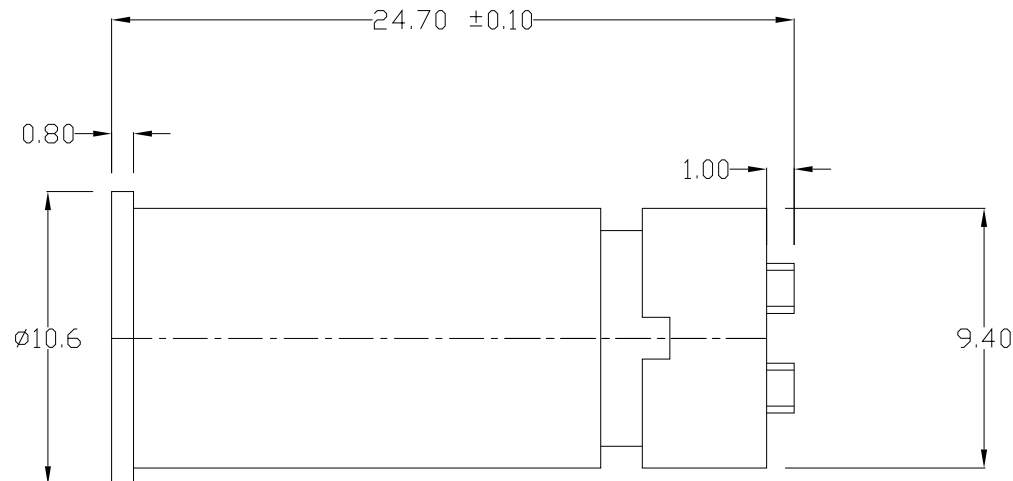


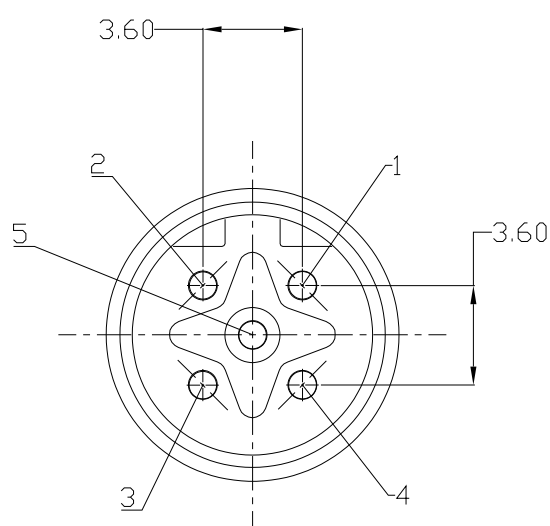

Nut

NOTE:

MATERIAL

Housing: PBT UL94V-0, BLACK
Contact: BRASS
Nut: BRASS
O-Ring: EPDM, BLACK

FINISH

Contact: 10u" GOLD PLATED
Under Plate: NICKEL
Nut: NICKEL

ELECTRICAL

Rated Current: 4A
Rated Voltage: 60V
Insulator Resistance: 100 MΩhms MIN.
Contact Resistance: 10 mΩhms MAX.
Water Proof: IP67

ENVIRONMENT

Operating Temp: -40°C TO +85°C

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

A. Joyner

DATE:

10/30/2020

Tolerance

.X ±0.20

.XX ±0.10

.XXX ±0.05

UNITS = mm

NorComp

DO NOT SCALE FROM DRAWING

SCALE:

NTS

SHEET

OF

1

1

REV

2

DWG NO.

858-B05-103RLU4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [NorComp](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [8R5000A16M005](#) [1-3637-600-5205](#) [1545399](#) [1A4000-348](#) [8R5006A18A120](#) [1R3006A20M005](#) [1R3006A20M030](#) [RF-](#)
[12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [XS3P-M421-2](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [7A3006-32](#) [1R3004A20A1201](#) [N03FA03144](#) [1406328](#) [XS2RD4265](#) [080804EMF00000](#) [XS2R-D426-1](#)
[XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#) [MA1LKE1700](#) [1400943](#) [8R4006A16M020](#) [WR8U26E02C300](#)
[8R5000A16M020](#) [1R3000A20M050](#) [884A30K05M006](#) [1200910005](#) [1201010003](#) [2168083-2](#) [RC-Z2062](#) [SACC-MSQ-M12MS-25-3 2 SCO](#)
[SACC-E-FSB-5CON-M16/0 5 SC](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [SACC-1/2 NPT-LOCKNUT](#) [BEDC854NN0000052A000](#)
[BKUA854NN0086155A000](#) [T4145515021-002](#)