



NOTE:

MATERIAL

HOUSING:	PBT UL94V-0, BLACK
CONTACT:	10 μ " GOLD PLATED BRASS
SHELL:	NICKEL PLATED BRASS
NUT:	ALUMINUM ALLOY
ORING:	EPDM, BLACK
GROUND:	NICKEL PLATED BRASS
XSHELL:	NICKEL PLATED ZINC ALLOY
MAIN BODY:	ALUMINUM ALLOY
GLAND:	SILICONE, BLACK
GLAND CAGE:	POM, WHITE
GLAND NUT:	ALUMINUM ALLOY

ELECTRICAL

RATED CURRENT:	0.5A
RATED VOLTAGE:	50VAC/60VDC
INSULATION RESISTANCE:	100 M Ω hms MIN.
CONTACT RESISTANCE:	10 m Ω hms MAX.
WATER PROOF:	IP67
ENVIRONMENT	
OPERATION TEMPERATURE:	-40°C TO +85°C

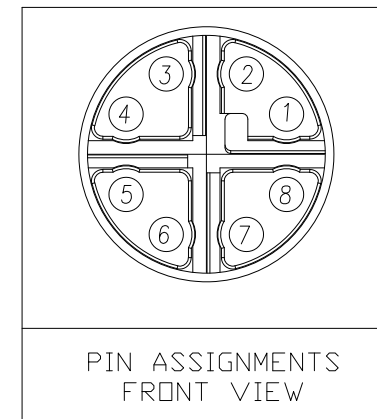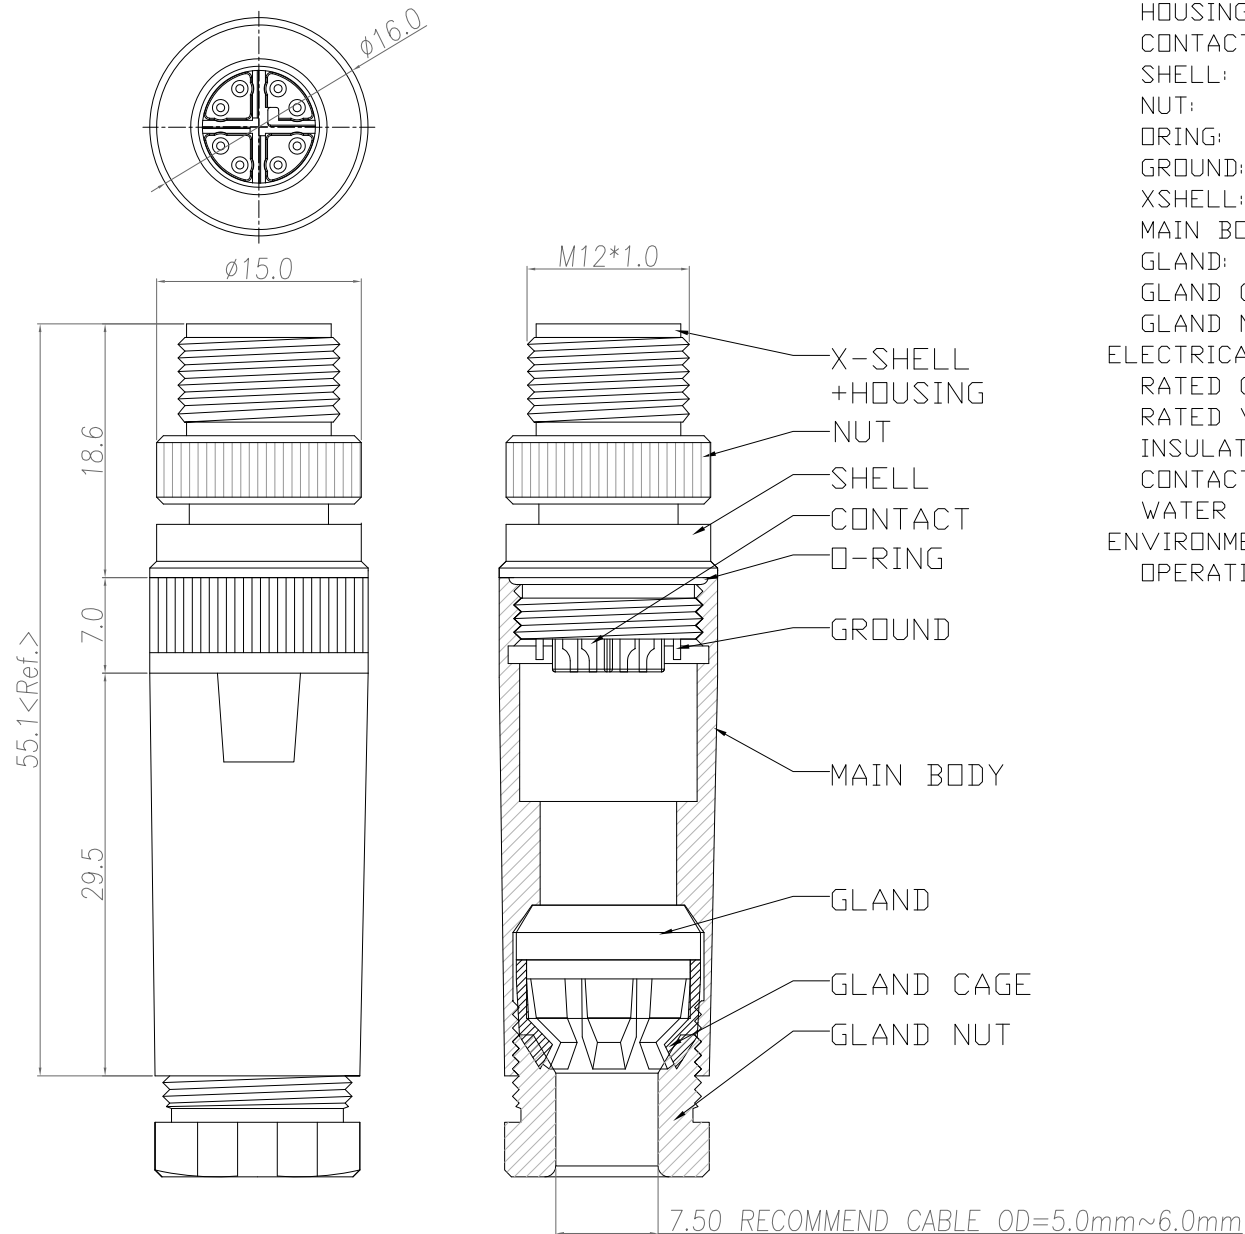

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

02/18/2022

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

0

DWG NO.

858-X08-103RKT4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [NorComp](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [8R5000A16M005](#) [1-3637-600-5205](#) [1545399](#) [1A4000-348](#) [8R5006A18A120](#) [1R3006A20M005](#) [1R3006A20M030](#) [RF-](#)
[12P1N8A80DU](#) [RF-12P1N8A90DU](#) [41-01016](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [XS3P-M421-2](#) [SACC-DSI-FS-5P-PG9-L180 SC](#)
[8R5006A16M020](#) [8R5006A16M005](#) [7A3006-32](#) [1R3004A20A1201](#) [N03FA03144](#) [1406328](#) [XS2RD4265](#) [080804EMF00000](#) [XS2R-D426-1](#)
[XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#) [MA1LKE1700](#) [1400943](#) [8R4006A16M020](#) [WR8U26E02C300](#)
[8R5000A16M020](#) [1R3000A20M050](#) [884A30K05M006](#) [1200910005](#) [1201010003](#) [2168083-2](#) [RC-Z2062](#) [SACC-MSQ-M12MS-25-3 2 SCO](#)
[SACC-E-FSB-5CON-M16/0 5 SC](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [SACC-1/2 NPT-LOCKNUT](#) [BEDC854NN0000052A000](#)
[BKUA854NN0086155A000](#) [T4145515021-002](#)