



PANEL CUT-OUT

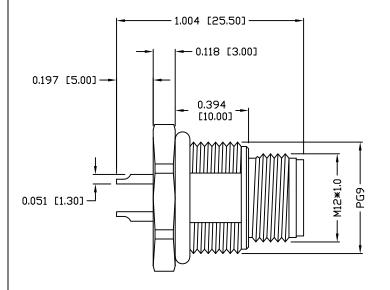



NOTE:

MATERIAL

HOUSING:

CONTACT: SHELL NUT: □-RING:

BRASS BRASS EPDM, BLACK

BRASS

FINISH

CONTACT:

GOLD PLATED

SHELL:

□VER 50u" NICKEL NICKEL PLATED

PBT UL94V-0, BLACK

NUT

60u" T□ 100u" NICKEL PLATED

60u" T□ 100u"

ELECTRICAL:

RATED CURRENT: RATED VOLTAGE:

250V

INSULATION RESISTANCE: CONTACT RESISTANCE:

100 MOhms MIN. 10 mOhms MAX.

WATER PROOF:

ENVIRONMENT:

OPERATIION TEMPERATURE:

-40°C TD +85°C 22

IP67

4A

MAX WIRE AWG:

859RD04-103R00Y

3 = BRASS/NICKEL SHELL & NUT-

S = STAINLESS STEEL SHELL & NUT

1 = GOLD FLASH -4 = 10u'' GDLD

RoHS COMPLIANT

UNITS = INCHES [MM]

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. DRAWN: DATE: M. SIGMON 07-26-16

NorComp

SCALE: REV SHEET OF NTS 3 DWG NO.

859RD04-103R00Y

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below:

600X518037X 6STD15PCR99B70A 8R4000A16M020 8R5000A16M005 1200910002 1203580030 1200910008 1200910011 1300140094 130203-0054 1300140026 1300150099 RF-12S1N8A90DU 1-3637-600-5205 1612618 21036836414 8R4006A16M010 1604232 1R3006A20M005 RF-12P1N8A90DU 41-40011 42-00006 42-01015 4-22279-4 4-22281-1 4-22284-9 43-00113 43-01088 43-01203 41-40013 42-00008 43-00343 43-01026 43-01162 43-01173 43-10000 XS3P-M421-2 600X518050X SACC-DSI-FS-5P-PG9-L180 SC 8R5006A16M020 8R5006A16M005 8R4000A16M010 6-22279-3 1605332 N03FA03144 1300140077 43-16213 43-01338 XS2RD4265 XS2R-D426-1