

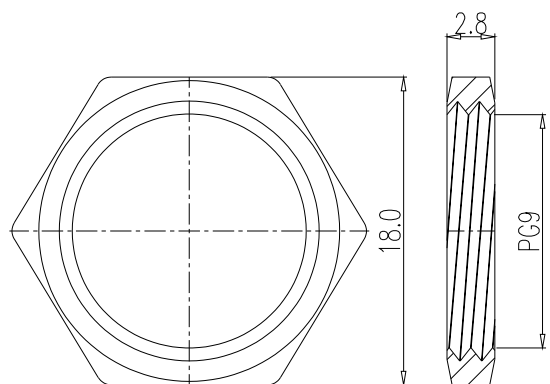
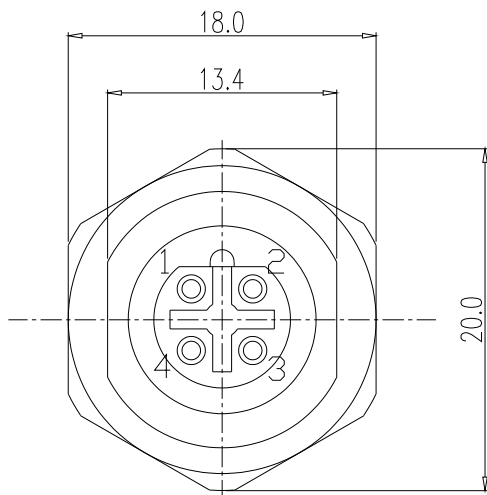


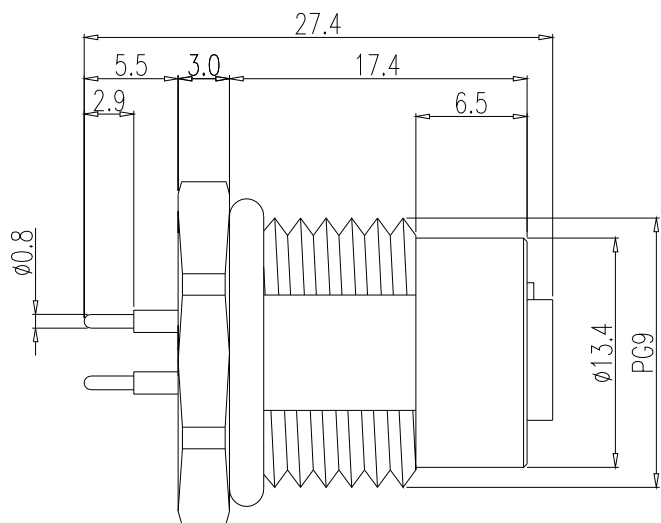


NUT

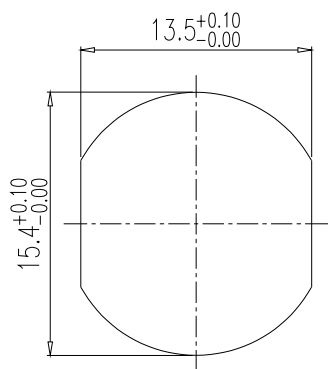

RECOMMEND PANEL CUT-OUT

NOTE:

MATERIAL	
HOUSING:	PBT UL94V-0, BLACK
CONTACT:	BRASS
SHELL:	BRASS
NUT:	BRASS
O-RING:	EPDM, BLACK
FINISH	
CONTACT:	10u" GOLD PLATED
NUT:	NICKEL
SHELL:	NICKEL
ELECTRICAL	
RATED CURRENT:	4A
RATED VOLTAGE:	250V
INSULATOR RESISTANCE:	100 MΩhms MIN.
CONTACT RESISTANCE:	10 mΩhms MAX.
WATER PROOF:	IP67
ENVIRONMENT	
OPERATION TEMPERATURE:	-40°C TO +85°C



RECOMMENDED P.C.B LAYOUT (TOP VIEW)

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
J. KADEL
DATE:
06/12/2019

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE: NTS	SHEET 1	OF 1	REV 1
DWG NO.	860-B04-213R004		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) ***category:***

Click to view products by [NorComp](#) ***manufacturer:***

Other Similar products are found below :

[600X518037X](#) [6STD09SAM99B70X](#) [1-3637-600-5205](#) [1545399](#) [1R3006A20M005](#) [1R3006A20M030](#) [41-01016](#) [4-22281-1](#) [4-22284-9](#) [41-40005](#) [600X518050X](#) [SACC-DSI-FS-5P-PG9-L180 SC](#) [8R5006A16M020](#) [1406328](#) [XS2R-D426-1](#) [XS8A-0441](#) [2273142-2](#) [41-50000](#) [41-50002](#) [ASB 8-S3064/5 M](#) [43-02534](#) [MA1LKE1700](#) [1400943](#) [1201010003](#) [SACC-DSI-FS-4CON-PG9/2 0UL](#) [BEDC854NN0000052A000](#) [BKUA854NN0086155A000](#) [60.312.11](#) [1302010338](#) [BAE00010129](#) [1426186](#) [1612166](#) [1628138](#) [1597940](#) [1415374](#) [1413539](#) [1605969](#) [1416742](#) [7000-88601-0000000](#) [7000-P4421-0000000](#) [WY16K2BZM1](#) [SA1211/S2IB](#) [SA2010/P12IB](#) [SA2010/P2IS](#) [SA2010/P9IB](#) [SA2011/P2IB](#) [SA2013/S12B](#) [SA2013/S9B](#) [SA2810/P2IS](#) [SA610/S3B](#)