



NOTE: **MATERIAL** HOUSING PBT UL94V-0, BLACK FLANGE PBT UL94V-0, BLACK CONTACT BRASS, PLATING P/N KEY BELOW SHELL STEEL, NICKEL O-RING SILICONE **EPOXY** SEALING COMPOUND HARDWARE BRASS; NICKEL PLATED ELECTRICAL POWER CONTACT RATED CURRENT P/N KEY BELOW VOLTAGE 1000 VAC 1 MIN INSULATOR RESISTANCE 5 G0hms MIN. POWER CONTACT RESISTANCE 1.0 m0hms MAX. WATER PROOF **IP67** ENVIRONMENT

-25°C TO +85°C

REV

CDFS3W3203LYYY

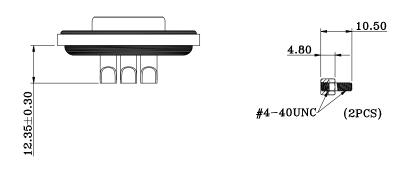

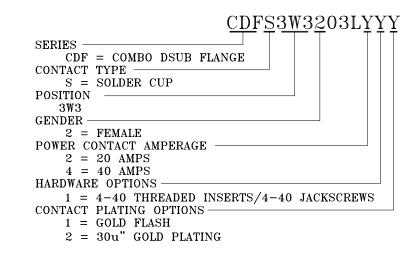

OPERATION TEMPERATURE



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. DRAWN: J. KADEL DATE:

04/07/2020

TOLERANCES ± 0.40 X. ± 0.30 .XX ± 0.20 .XXX ± 0.10

DO NOT SCALE FROM DRAWING UNITS = mmSCALE: SHEET NTS NorComp DWG NO.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Mixed Contact Connectors category:

Click to view products by NorComp manufacturer:

Other Similar products are found below:

790-025SF-5P5NMN 790-025SJ-7P7NML DAM-7W2PC L717TWB5W5P3R L717TWB5W5PRM84 L717TWP3W3P
3003W3PXX56N40X 3005W5PXX99E40X 3005W5SXX99A30X 3005W5SXX99E40X 3013W6SCM99A10X 3036W4PCM41A10X
3036W4SCM99A10X FCE17-E2W2SS-2N0 212522-7 3003W3PXX43A10X 3003W3SXX56N40X 3005W5PXX88N40X
3008W8SXX57A30X 3009W4PCT57P20X 3011W1SXK99A10X 3017W2SAR69C40X 321WA4PXK99A60X 3F3SSC22S41A30X
L717TWA7W2PP2SY3R DBM-17W2S-1A8N-A190-A197-1 421WA4PCR50E20X 09691009009 09691100022500 09693009176
09692009147 09693909015 6017W2PCM41B30X 790-061SH-36W2NMNA 790-044SE-7P3MNPB 790-043PE-11P2MPA 790-043PB2P2MPB 790-029SB-2P2MEPA 790-028PK-9P9MPA 790-028PH-54P2MGA 790-028PH-36P2MNA 790-028PB-2P2MPA 790-027SH5W5MTEP 790-026PH-54P2ZNUG 790-026PH-54P2MP 790-026PH-36P2ZNUG 790-026PH-36P2MG 790-026PD-3P3MP 790-025SJ7P7EMS 790-025SH-36W2NMT