



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE30065 thru NTE30071 Super Bright LED Indicators, 10mm

Features:

- RoHS Compliant
- All Plastic Mold Type w/Water Clear Lens:
 NTE30065 (Yellow Green, AlInGaP/GaAs)
 NTE30066 (Light Green, InGaN/GaN)
 NTE30067 (Orange, AlInGaP/GaAs)
 NTE30068 (Light Red, AlInGaP/GaAs)
 NTE30069 (Deep Red, GaAlAs/GaAlAs)
 NTE30070 (Blue, INGaN/GaN)
 NTE30071 (Super White, GaInN/GaN)

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Reverse Voltage, V_R	NTE30066, NTE30070	4V
	NTE30065, NTE30067, NTE30068, NTE30069, NTE30071	5V
Continuous Forward Current, I_F	All Devices	25mA
	NTE30066 Only	30mA
Peak Forward Current (1.10 Duty Cycle, 0.1ms Pulse Width), I_{FM}	NTE30065, NTE30067, NTE30068, NTE30069	50mA
	NTE30066, NTE30070, NTE30071	100mA
Electrostatic Discharge (HBM, NTE30071 Only), ESD	150V
Power Dissipation, P_D	NTE30065, NTE30067, NTE30068	100mW
	NTE30069	110mW
	NTE30066, NTE30070	120mW
	NTE30071	80mW
LED Junction Temperature, T_j	+100°C
Operating Temperature Range, T_{opr}	All Devices	-25°C to +85°C
	NTE30071 Only	-20°C to +80°C
Storage Temperature Range, T_{stg}	NTE30067 Only	-25°C to +100°C
	NTE30071 Only	-30°C to +100°C
	All Other Devices	-40°C to +100°C
Lead Temperature (During Soldering, .063 (1.6mm) from body, 5sec max), T_L	+260°C

Electro-Optical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage NTE30065	V_F	$I_F = 20\text{mA}$	-	2.2	2.5	V
NTE30066, NTE30070			-	3.5	4.0	V
NTE30067, NTE30068			-	2.0	2.5	V
NTE30069			-	1.86	2.5	V
NTE30071			3.0	3.3	3.6	V


Rev. 11-20



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Current All Devices NTE30066, NTE30070	I _R	V _R = 5V	–	–	10	µA
		V _R = 4V	–	–	60	µA
Luminous Intensity NTE30065 NTE30066 NTE30067 NTE30068 NTE30069 NTE30070 NTE30071	I _V	I _F = 20mA, Note 1	600	1300	–	mcd
			1800	3500	–	mcd
			1200	2000	–	mcd
			1400	2000	–	mcd
			1500	3000	–	mcd
			600	1200	–	mcd
			10000	–	12000	mcd
Peak Emission Wave Length NTE30065 NTE30066 NTE30067 NTE30068 NTE30069 NTE30070 NTE30071	λ _P	I _F = 20mA	–	575	–	nm
			–	523	–	nm
			–	592	–	nm
			–	620	–	nm
			–	660	–	nm
			–	468	–	nm
			CIE Coordinates, Typ	X: 0.30; Y: 0.30		
Dominant Wave Length NTE30065 NTE30066 NTE30067 NTE30068 NTE30069 NTE30070	λ _d (HUE)	I _F = 20mA, Note 2	–	572	–	nm
			520	525	540	nm
			–	590	–	nm
			–	615	–	nm
			–	645	–	nm
			463	470	479	nm
Correlative Color Temp (NTE30071 Only)	T _c	I _F = 20mA	7000	–	9000	K
Spectral Line Half Width NTE30065 NTE30066 NTE30067, NTE30068 NTE30069 NTE30070	Δλ	I _F = 20mA	–	15	–	nm
			–	45	–	nm
			–	25	–	nm
			–	20	–	nm
			–	35	–	nm
Viewing Angle All Devices NTE30071	2θ ^{1/2}	I _F = 20mA	–	40	–	deg.
			–	30	–	deg.
Terminal Capacitance NTE30065 NTE30067 NTE30068 NTE30069	C _t	V = 0V, f = 1MHz	–	35	–	pF
			–	14	–	pF
			–	20	–	pF
			–	22	–	pF
Response Frequency NTE30065, NTE30067, NTE30068, NTE30069	F _c		–	4	–	MHz
Optic Rise Time (NTE30066 Only)	τ	I _F = 20mA	–	30	–	ns

Note 1. Luminous intensity is measured with an Exeltron 2001.

Note 2. The dominate wavelength, λ_d, is derived from the CIE Chromaticity Diagram and represents the color of the device.

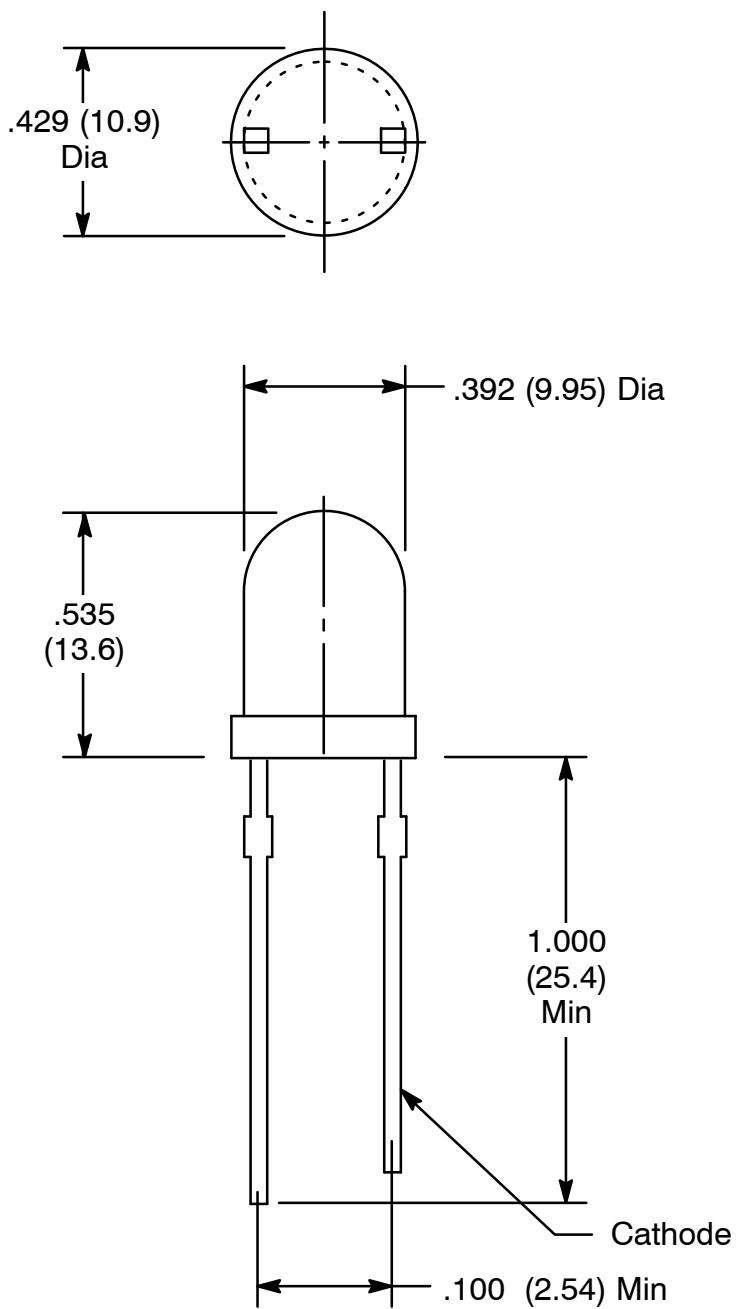

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole category:

Click to view products by NTE manufacturer:

Other Similar products are found below :

[LTL-10234W](#) [LTL-10254W](#) [LTL-1214A](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-433P](#) [LTL-5234](#) [LTL87HTBK](#) [LTW-87HD4B](#)
[HLMP-3507-D00B1](#) [HLMP-EL30-PS0DD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [NTE30036](#) [NTE30044](#) [NTE30059](#) [LD CQDP-1U3U-W5-1-K](#) [LO566UHR3-70G-A3](#) [LP379PPG1C0G0300001](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSS-LX4673ID-410B](#) [1L0532Y24I0TD001](#) [264-7SYGD/S530-E2](#) [HLMP1385](#) [LTL-10224W](#) [LTL-1224A](#) [LTL-1234A](#) [LTL-1BEHJ-012](#) [LTL-2251AT](#) [LTL-307YE-012](#) [LTL-403HR](#) [LTL-4222](#) [LU7-E-B](#) [4380H1](#) [TLHY44K1L2](#) [HLMP-3962-F0002](#) [HLMP-GG15-R0000](#) [323-2SURD/S530-A3](#)
[L53SRC/E-Z](#) [L-7679C1ZGC](#) [4302T1-5V](#) [4306D23](#) [4363D1/5](#) [WP1503SRC/J4](#) [WP153GDT](#) [WP153YDT](#)