

Technical data sheet

Cap nut cable gland, metric thread, silver grey

Item no. 2022849



The quickest and most convenient way of providing strain relief and tightness with cable glands on junction boxes and housings is with the tried-and-trusted V-TEC VM cable glands from OBO. With the integrated sealing lip and the special OBO lamella technology, protection class IP68 is achieved. Strain relief and tightness have been tested to DIN EN 62444.

The connecting threads of the cable glands are metric or PG and are therefore suitable for universal use. Once screwed in place, the installation is there forever, as the optimum thread adjustment with the right pitch ensures permanent resistance to shaking.

Applications: From private housing with junction boxes up to industrial applications in the distributor cabinet.

Temperature range: -20 °C to +65 °C.




PA Polyamide

Master data

Item no.	2022849
Type	V-TEC VM25 SGR
Description 1	Cable gland
Description 2	fully metric
Dimension	M25
Colour	Silver grey
RAL number	7001
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	25 Piece
Weight	1,36 kg/100 pc.

Technical data

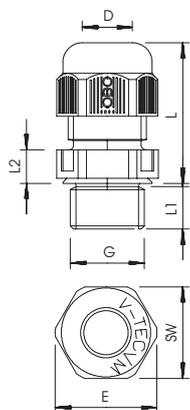

Dimension E	32,00 mm
Dimension L min.	26,00 mm
Dimension L max.	35,00 mm
Dimension L1	10,00 mm
Dimension L2	6,00 mm
WAF	29,00 mm
Version	Straight
Type of seal	Sealing ring
Bend protection	<input type="checkbox"/>
Sealing range D	9,00 - 17,00 mm
Sealing range D	0,35 - 0,67 in
explosion-proof	<input type="checkbox"/>
Flat cable threaded connection	<input type="checkbox"/>
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Thread	M25 x 1,5
Thread type	Metric
Thread length	10,00 mm
Thread increase	1,50 mm
Nominal thread size	25

Technical data sheet

Cap nut cable gland, metric thread, silver grey

Item no. 2022849



Technical data

Fibre-glass reinforced	<input type="checkbox"/>
Halogen-free	<input checked="" type="checkbox"/>
Installation torque	5,00 Nm
Multiple sealing insert	<input type="checkbox"/>
With locknut	<input type="checkbox"/>
Impact-resistant	<input type="checkbox"/>
Hexagonal corner dimension	32,00 mm
Protection rating	IP68
Splittable gland	<input type="checkbox"/>
max. permitted ambient temperature	-20,00 - 65,00 °C
Strain relief option	<input checked="" type="checkbox"/>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:

Click to view products by [OBO BETTERMANN](#) manufacturer:

Other Similar products are found below :

[DBZM-6828](#) [1498](#) [1.587.3400.71](#) [300623](#) [CD21NS-01](#) [5525](#) [35882](#) [M4340GAE](#) [NG-9516 Gasket](#) [52006157](#) [BM4963L](#) [53629556](#)
[53629570](#) [53629675](#) [52025230](#) [52015833](#) [52024853](#) [52103160](#) [52115810](#) [52115820](#) [52115830](#) [53017640](#) [53017810](#) [53019051](#) [53019071](#)
[53019081](#) [53019090](#) [53019091](#) [53019290](#) [53111457](#) [53111477](#) [53112055](#) [53112165](#) [53112270](#) [53112330](#) [53112360](#) [53112665](#) [53112689](#)
[53112690](#) [53112755](#) [53112775](#) [53112840](#) [53112860](#) [53112879](#) [53112886](#) [53112925](#) [53112926](#) [53119063](#) [54110844](#) [54110845](#)