


G3VM-□WR

MOS FET Relays

P-SON 4-pin, High-Current and Low-ON-Resistance Type

New Non-Leaded, High-Current P-SON Package

- Load voltages 30 V/60 V/100 V/200 V.
- 30 V relay: Continuous load current of 4.5 A max.
- 60 V relay: Continuous load current of 3 A max.
- 100 V relay: Continuous load current of 2 A max.
- 200 V relay: Continuous load current of 0.35 A max.
- High ambient operating temperature: -40°C to +110°C

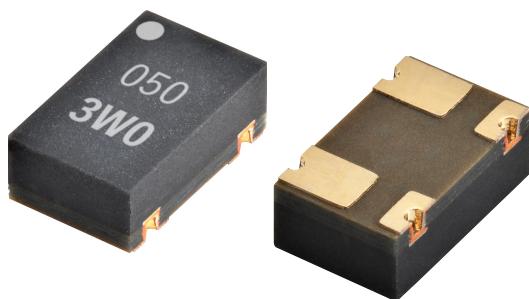

Note: The actual product is marked differently from the image shown above.


RoHS Compliant

■ Application Examples

- | | |
|--------------------------------|--------------------------------|
| • Semiconductor test equipment | • Test & measurement equipment |
| • Communication equipment | • Data loggers |

■ Package (Unit : mm, average)

P-SON 4-pin



Note: The actual product is marked differently from the image shown above.

■ Model Number Legend

G3VM-□ □ □ □
1 2 3 4

1. Load voltages

- 3: 30 V
- 6: 60 V
- 10: 100 V
- 20: 200 V

2. Contact form

- 1: 1a (SPST-NO)

3. Package type

- W: P-SON 4-pin

4. Additional function

- R: Low on-resistance

■ Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
P-SON4	1a (SPST-NO)	Surface-mounting Terminals	30 V	4.5 A	G3VM-31WR	1 pc.	G3VM-31WR (TR05)	500 pcs.
			60 V	3 A	G3VM-61WR		G3VM-61WR (TR05)	
			100 V	2 A	G3VM-101WR		G3VM-101WR (TR05)	
			200 V	0.35 A	G3VM-201WR		G3VM-201WR (TR05)	

* The AC peak and DC values are given for the load voltage and continuous load current.

Note: When ordering tape packing, add "(TR05)" (500 pcs/reel) to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut P-SON is packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

G
3
V
M
I
□
W
R

P
I
S
O
N

■Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-31WR	G3VM-61WR	G3VM-101WR	G3VM-201WR	Unit	Measurement conditions
Input	LED forward current	I_F		30		mA	
	LED forward current reduction rate	$\Delta I_F/\text{°C}$		-0.3		$\text{mA/}^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	V_R		6		V	
	Junction temperature	T_J		125		$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	V_{OFF}	30	60	100	200	V
	Continuous load current (AC peak/DC)	I_o	4.5	3	2	0.35	A
	ON current reduction rate	$\Delta I_o/\text{°C}$	-45	-30	-20	-3.5	$\text{mA/}^\circ\text{C}$
	Pulse ON current	I_{op}	10	9	6	1.05	A
Junction temperature		T_J		125		$^\circ\text{C}$	
Dielectric strength between I/O *		V_{i-o}		500		Vrms	AC for 1 min
Ambient operating temperature		T_a		-40 to +110		$^\circ\text{C}$	
Ambient storage temperature		T_{stg}		-40 to +125		$^\circ\text{C}$	With no icing or condensation
Soldering temperature		-		260		$^\circ\text{C}$	10 s


Note: The product structure is sensitive to static electricity. When handling it, be sure to take measures against static electricity for the workbench, workers, soldering iron, and soldered mounted devices.

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-31WR	G3VM-61WR	G3VM-101WR	G3VM-201WR	Unit	Measurement conditions	
Input	V_F	Minimum	1.1			V	$I_F=10 \text{ mA}$	
		Typical	1.22					
		Maximum	1.4					
Reverse current	I_R	Maximum		10		μA	$V_R=5 \text{ V}$	
Capacitance between terminals	C_T	Typical		70		pF	$V=0 \text{ V}, f=1 \text{ MHz}$	
Trigger LED forward current	I_{FT}	Typical	1	0.9	1	mA	$I_o=1 \text{ A} (\text{G3VM-31WR/61WR/101WR})$ $I_o=0.35 \text{ A} (\text{G3VM-201WR})$	
		Maximum		3				
Release LED forward current	I_{FC}	Minimum	0.1			mA	$I_{OFF}=10 \mu\text{A}$	
		Typical	0.9	0.8	0.9			
Output	R_{ON}	Typical	25	45	130	$m\Omega$	$I_o=\text{Continuous load current rated value}$ $I_F=5 \text{ mA}, t<1 \text{ s}$	
		Maximum	50	100	200			
Current leakage when the relay is open	I_{LEAK}	Maximum	1000 (10)		10	nA	$V_{OFF}=\text{Load voltage rated value}$ 31WR : ($V_{OFF}=20 \text{ V}$) 61WR : ($V_{OFF}=40 \text{ V}$) 101WR : ($V_{OFF}=80 \text{ V}$)	
Capacitance between terminals	C_{off}	Typical	450	250	170	75	pF	$V=0 \text{ V}, f=1 \text{ MHz}$
Capacitance between I/O terminals	C_{i-o}	Typical		1		pF	$f=1 \text{ MHz}, V_s=0 \text{ V}$	
Insulation resistance between I/O terminals	R_{i-o}	Typical		10^8		MΩ	$V_{i-o}=500 \text{ VDC}, RoH \leq 60\%$	
Turn-ON time	t_{ON}	Typical	3	2	0.5	ms	$I_F=5 \text{ mA}, R_L=200 \Omega,$ $V_{DD}=10 \text{ V} (\text{G3VM-31WR})$ $V_{DD}=20 \text{ V}$ (G3VM-61WR/101WR/201WR) *	
		Maximum	5	3	1			
Turn-OFF time	t_{OFF}	Typical	0.04	0.03	0.04			
		Maximum		1				

* Turn-ON and Turn-OFF Times

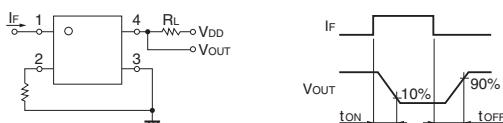

■Recommended Operating Conditions

For high reliability usage, Recommended Operation Conditions are measures that take into account the derating of Absolute Maximum Ratings and Electrical Characteristics.


Each item on this list is an independent condition, so it is not simultaneously satisfying several conditions.

Item	Symbol		G3VM-31WR	G3VM-61WR	G3VM-101WR	G3VM-201WR	Unit
Load voltage (AC peak/DC)	V_{DD}	Maximum	24	48	80	160	V
Operating LED forward current	I_F	Typical		5			mA
		Maximum		20			
		Minimum		-20			
Continuous load current (AC peak/DC)	I_o	Maximum	4.5	3	2	0.35	A
Ambient operating temperature	T_a	Minimum					$^\circ\text{C}$
		Maximum		85			


G
3
V
M
I
W
RP
I
S
O
N

■Engineering Data


● LED forward current vs.
ambient temperature

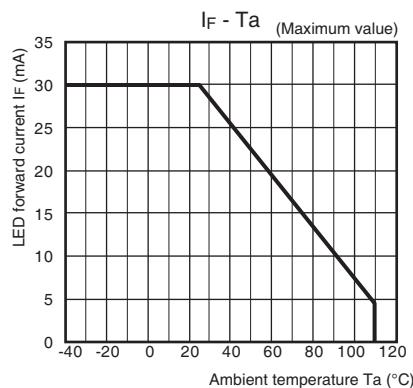


● Continuous load current vs.
ambient temperature

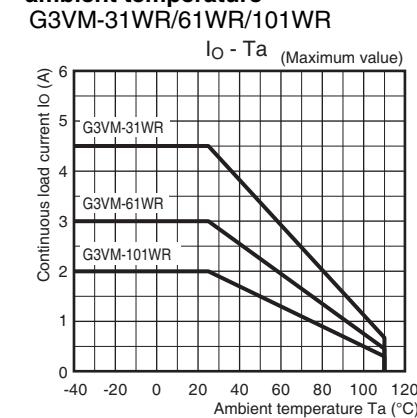


G3VM-201WR

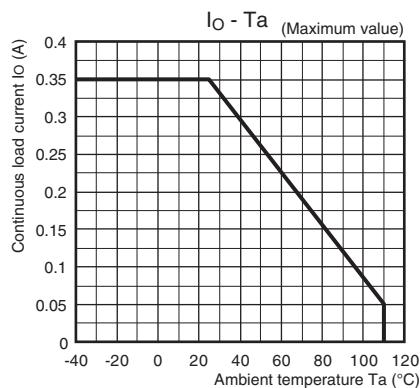


● LED forward current vs.
LED forward voltage

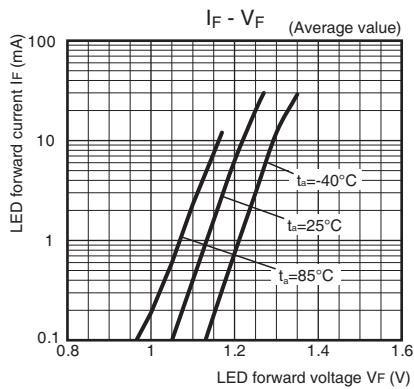


● Continuous load current vs.
on-state voltage

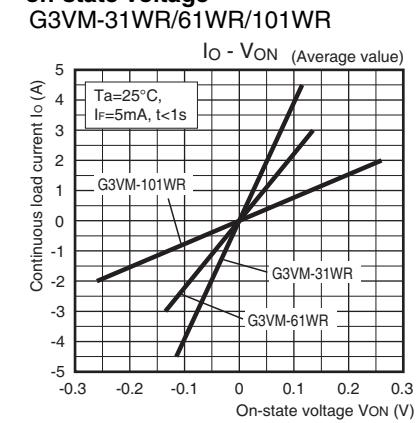


G3VM-201WR

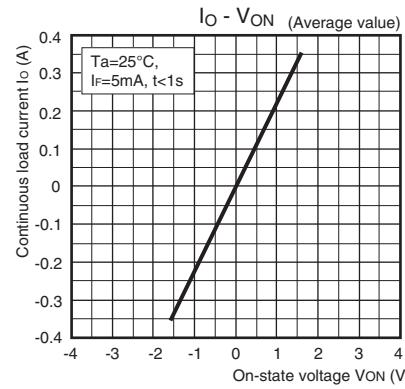


● On-state resistance vs.
ambient temperature

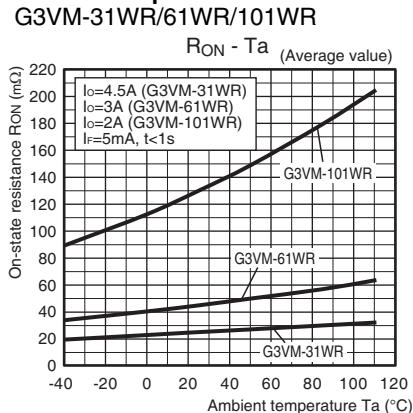


G3VM-201WR

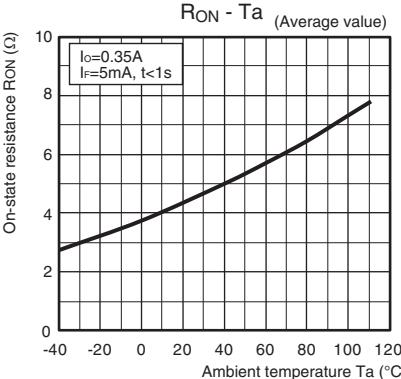

● Trigger LED forward current vs.
ambient temperature

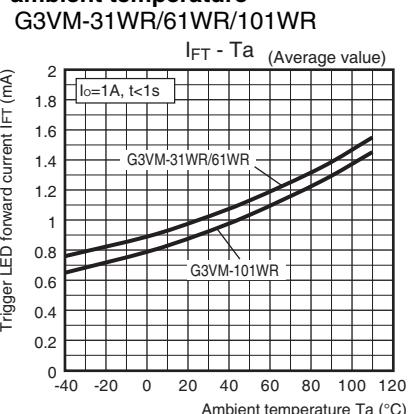

G3VM-201WR

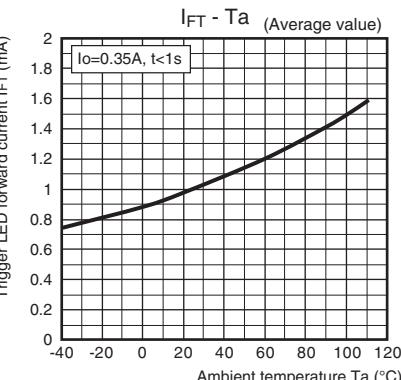

G
3
V
M
I
W
R


P
I
S
O
N

■Engineering Data


● Turn ON, turn OFF time vs.

LED forward current

G3VM-31WR/61WR/101WR

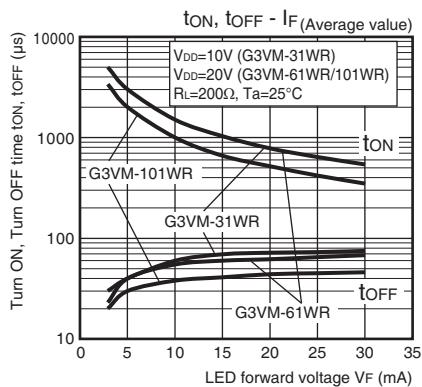


G3VM-201WR

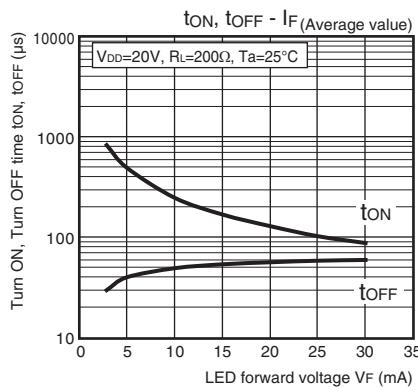


● Turn ON, turn OFF time vs. ambient temperature

G3VM-31WR/61WR/101WR

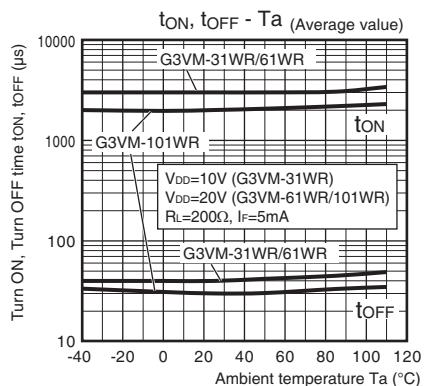


G3VM-201WR

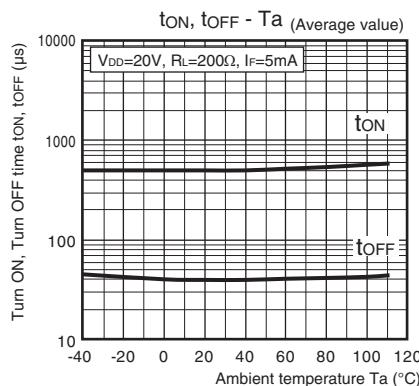


● Current leakage vs. load voltage

G3VM-31WR/61WR/101WR

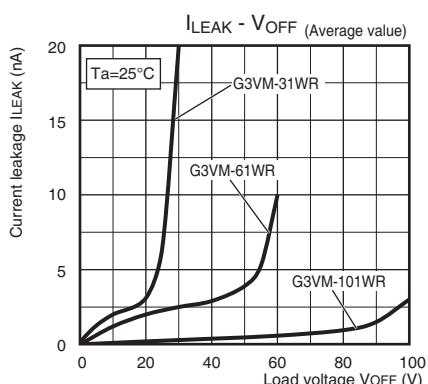


G3VM-201WR

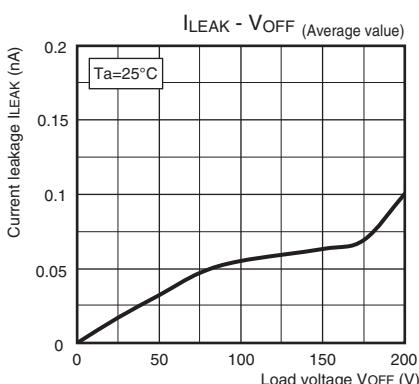


● Current leakage vs. ambient temperature

I_{LEAK} - Ta (Average value)

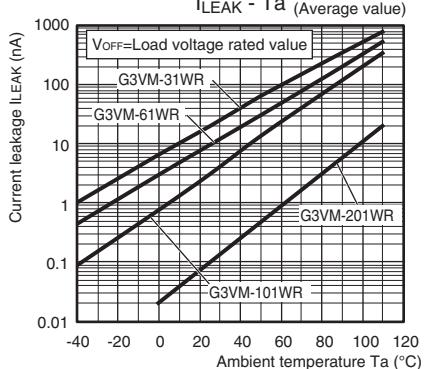

● Output terminal capacitance vs. load voltage

C_{OFF} - V_{OFF} (Average value)

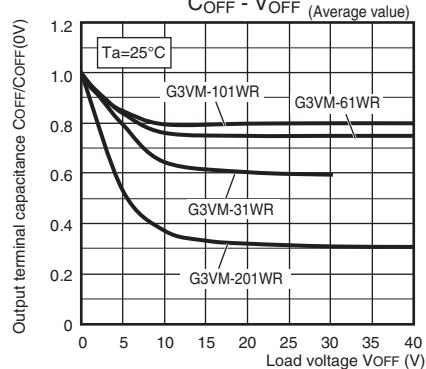

G
3
V
M
I
W
R


P
I
S
O
N

■Appearance / Terminal Arrangement / Internal Connections

■Appearance

P-SON (Power - Small Outline Non-Leaded)


P-SON 4-pin



* Actual model name marking for each model

Model	Marking
G3VM-31WR	3W0
G3VM-61WR	6W0
G3VM-101WR	AW0
G3VM-201WR	BW0

■Terminal Arrangement/Internal Connections (Top View)





Note 1. The actual product is marked differently from the image shown above.
2. "G3VM" does not appear in the model number on the relay.

■Dimensions (Unit: mm)

Surface-Mounting Terminals


Weight: 0.02 g

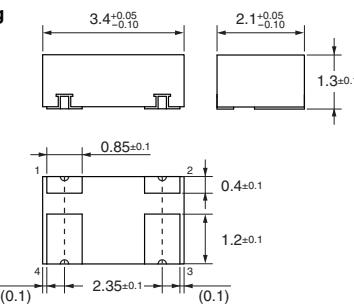

Note: The actual product is marked differently from the image shown here.

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

G
3
V
M
I
□
W
R

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Solid State Relays - PCB Mount category:

Click to view products by Omron manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#) [G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#) [3-1617776-2](#)
[CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#) [X4IDC15D](#)