

IGBT – Power, Single, N-Channel, Field Stop VII (FS7), SCR, TO247-3L 1200 V, 1.67 V, 40 A

AFGHL40T120RW-STD

Description

Using the novel field stop 7th generation IGBT technology in TO247 3-lead package, this device offers good performance with low on state voltage and low switching losses for both hard and soft switching topologies in automotive applications.

Features

- Extremely Efficient Trench with Field Stop Technology
- Maximum Junction Temperature – $T_J = 175^{\circ}\text{C}$
- Short Circuit Rated and Low Saturation Voltage
- Fast Switching and Tightened Parameter Distribution
- AEC-Q101 Qualified, PPAP Available Upon Request
- This Device is Pb-Free, Halogen Free/BFR Free and is RoHS Compliant

Applications

- Automotive E-compressor / Automotive EV PTC Heater / OBC

MAXIMUM RATINGS ($T_J = 25^{\circ}\text{C}$ unless otherwise noted)



Parameter		Symbol	Value	Unit
Collector-to-Emitter Voltage		V_{CE}	1200	V
Gate-to-Emitter Voltage		V_{GE}	± 20	
Transient Gate-to-Emitter Voltage			± 30	
Collector Current	$T_C = 25^{\circ}\text{C}$	I_C	80	A
	$T_C = 100^{\circ}\text{C}$		40	
Power Dissipation	$T_C = 25^{\circ}\text{C}$	P_D	468	W
	$T_C = 100^{\circ}\text{C}$		234	
Pulsed Collector Current	$T_C = 25^{\circ}\text{C}$, $t_p = 10 \mu\text{s}$ (Note 1)	I_{CM}	120	A
Short Circuit Withstand Time		T_{SC}	6	μs
Operating Junction and Storage Temperature ($V_{GE} = 15 \text{ V}$, $V_{CC} = 800 \text{ V}$, $T_C = 150^{\circ}\text{C}$)		T_J, T_{stg}	-55 to +175	$^{\circ}\text{C}$
Lead Temperature for Soldering Purposes		T_L	260	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. Repetitive rating: Pulse width limited by max. junction temperature

BV_{CES}	$V_{CE(sat)}$ TYP	I_C MAX
1200 V	1.67 V	40 A

PIN CONNECTIONS



MARKING DIAGRAM



$\$Y$ = onsemi Logo
 $\&Z$ = Assembly Plant Code
 $\&3$ = 3-Digit Date Code
 $\&K$ = 2-Digit Lot Traceability Code
 AFGHL40120RWSTD = Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping
AFGHL40T120RW-STD	TO-247-3L (Pb-Free)	30 Units / Tube

AFGHL40T120RW-STD

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case for IGBT	$R_{\theta JC}$	0.32	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	40	

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

OFF CHARACTERISTICS

Collector-to-Emitter Breakdown Voltage	BV_{CES}	$V_{GE} = 0\text{ V}, I_C = 1\text{ mA}$	1200	–	–	V
Zero Gate Voltage Collector Current	I_{CES}	$V_{GE} = 0\text{ V}, V_{CE} = V_{CES}$	–	–	40	μA
Gate-to-Emitter Leakage Current	I_{GES}	$V_{GE} = \pm 20\text{ V}, V_{CE} = 0\text{ V}$	–	–	± 400	nA

ON CHARACTERISTICS

Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 40\text{ mA}$	5.1	6	6.9	V
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE} = 15\text{ V}, I_C = 40\text{ A}, T_J = 25^\circ\text{C}$	–	1.67	2.00	V
		$V_{GE} = 15\text{ V}, I_C = 40\text{ A}, T_J = 175^\circ\text{C}$	–	2.1	–	

DYNAMIC CHARACTERISTICS

Input Capacitance	C_{IES}	$V_{CE} = 30\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$	–	3057	–	pF
Output Capacitance	C_{OES}		–	94.2	–	
Reverse Transfer Capacitance	C_{RES}		–	16.2	–	
Total Gate Charge	Q_G	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}, I_C = 40\text{ A}$	–	113	–	nC
Gate-to-Emitter Charge	Q_{GE}		–	29.6	–	
Gate-to-Collector Charge	Q_{GC}		–	51.7	–	

SWITCHING CHARACTERISTICS (Note: Si Diode Applied)

Turn-On Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V},$ $I_C = 20\text{ A}, R_G = 4.7\ \Omega,$ $T_J = 25^\circ\text{C}$	–	35.6	–	ns
Turn-Off Delay Time	$t_{d(off)}$		–	188	–	
Rise Time	t_r		–	29.2	–	
Fall Time	t_f		–	145	–	
Turn-On Switching Loss	E_{on}	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V},$ $I_C = 40\text{ A}, R_G = 4.7\ \Omega,$ $T_J = 25^\circ\text{C}$	–	1.11	–	mJ
Turn-Off Switching Loss	E_{off}		–	0.99	–	
Total Switching Loss	E_{ts}		–	2.1	–	
Turn-On Delay Time	$t_{d(on)}$		–	40.1	–	ns
Turn-Off Delay Time	$t_{d(off)}$		–	152	–	
Rise Time	t_r		–	55.4	–	
Fall Time	t_f		–	90.6	–	
Turn-On Switching Loss	E_{on}	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V},$ $I_C = 40\text{ A}, R_G = 4.7\ \Omega,$ $T_J = 25^\circ\text{C}$	–	3.27	–	mJ
Turn-Off Switching Loss	E_{off}		–	1.27	–	
Total Switching Loss	E_{ts}		–	4.54	–	

AFGHL40T120RW-STD

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

SWITCHING CHARACTERISTICS (Note: Si Diode Applied)

Turn-On Delay Time	t _{d(on)}	V _{CE} = 600 V, V _{GE} = 15 V, I _C = 20 A, R _G = 4.7 Ω, T _J = 175°C	–	40.5	–	ns
Turn-Off Delay Time	t _{d(off)}		–	256	–	
Rise Time	t _r		–	38.8	–	
Fall Time	t _f		–	282	–	
Turn-On Switching Loss	E _{on}	V _{CE} = 600 V, V _{GE} = 15 V, I _C = 20 A, R _G = 4.7 Ω, T _J = 175°C	–	1.58	–	mJ
Turn-Off Switching Loss	E _{off}		–	1.8	–	
Total Switching Loss	E _{ts}		–	3.38	–	
Turn-On Delay Time	t _{d(on)}	V _{CE} = 600 V, V _{GE} = 15 V, I _C = 40 A, R _G = 4.7 Ω, T _J = 175°C	–	46.8	–	ns
Turn-Off Delay Time	t _{d(off)}		–	199	–	
Rise Time	t _r		–	70.7	–	
Fall Time	t _f		–	167	–	
Turn-On Switching Loss	E _{on}	V _{CE} = 600 V, V _{GE} = 15 V, I _C = 40 A, R _G = 4.7 Ω, T _J = 175°C	–	4.74	–	mJ
Turn-Off Switching Loss	E _{off}		–	2.19	–	
Total Switching Loss	E _{ts}		–	6.93	–	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

AFGHL40T120RW-STD

TYPICAL CHARACTERISTICS

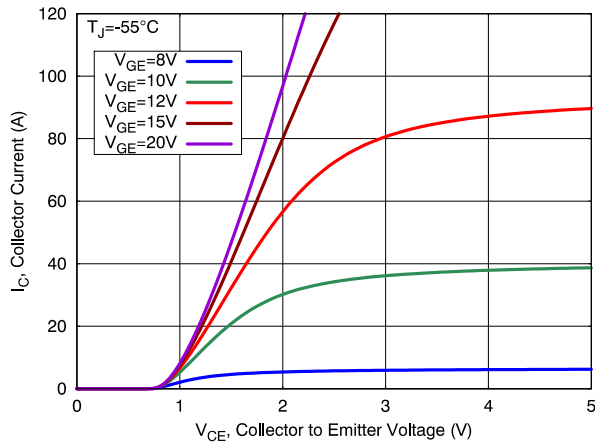


Figure 1. Output Characteristics

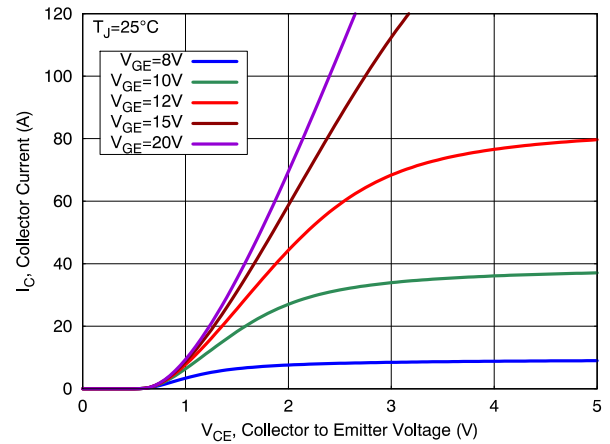


Figure 2. Output Characteristics

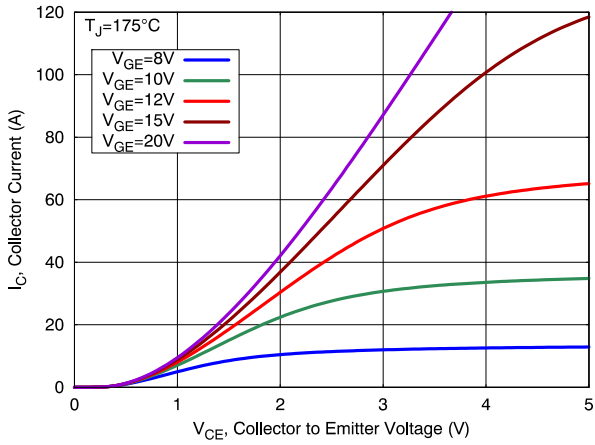


Figure 3. Output Characteristics

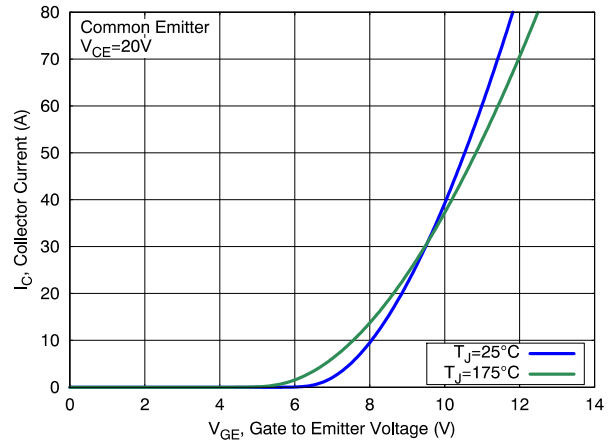


Figure 4. Transfer Characteristics

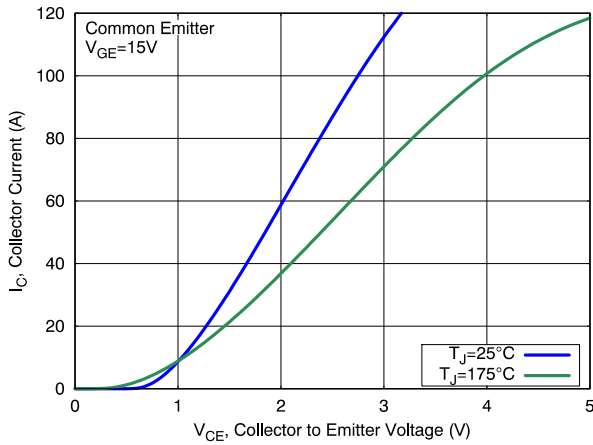


Figure 5. Saturation Characteristics

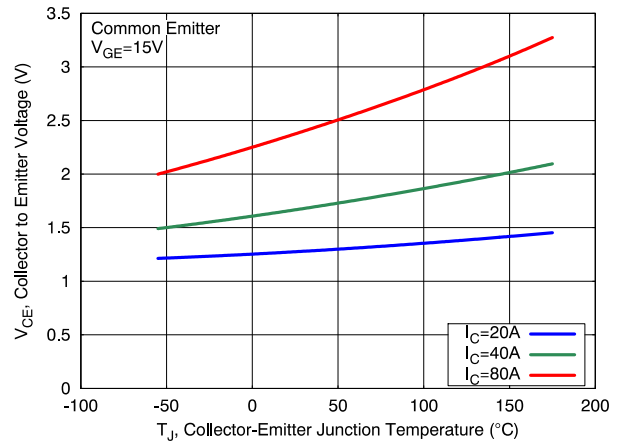


Figure 6. Saturation Voltage vs Junction Temperature

AFGHL40T120RW-STD

TYPICAL CHARACTERISTICS

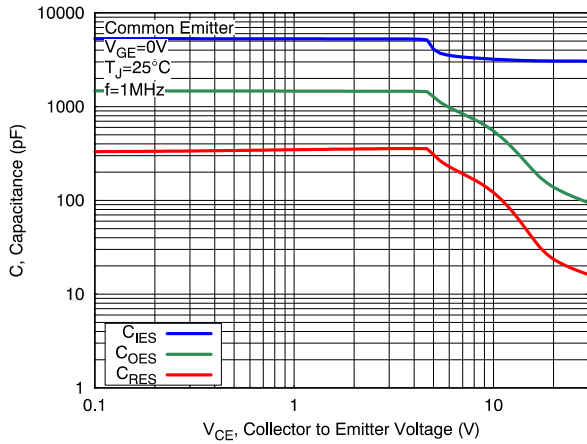


Figure 7. Capacitance Characteristics

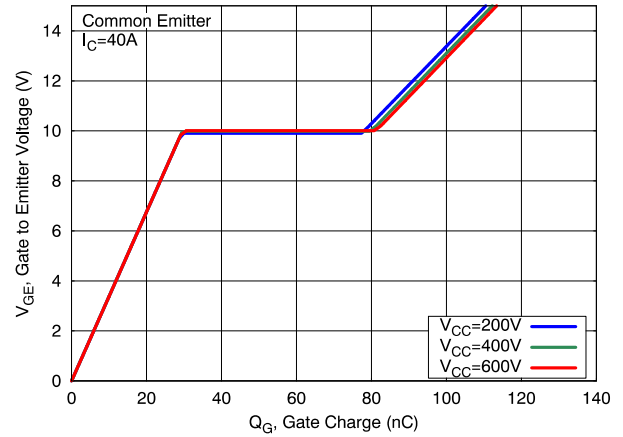


Figure 8. Gate Charge Characteristics

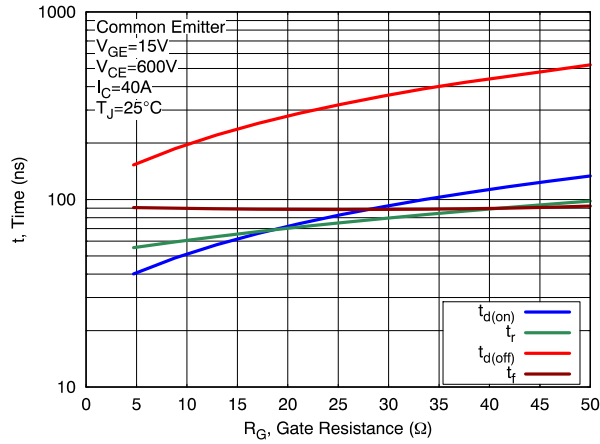


Figure 9. Switching Time vs Gate Resistance

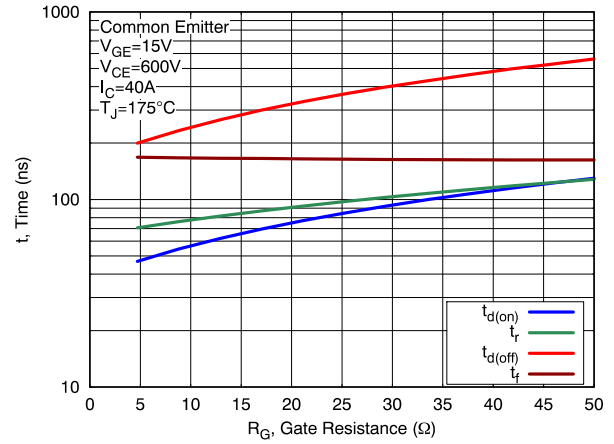


Figure 10. Switching Time vs Gate Resistance

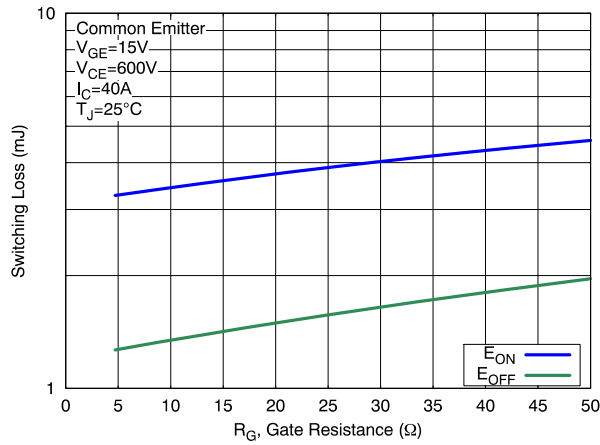


Figure 11. Switching Loss vs Gate Resistance

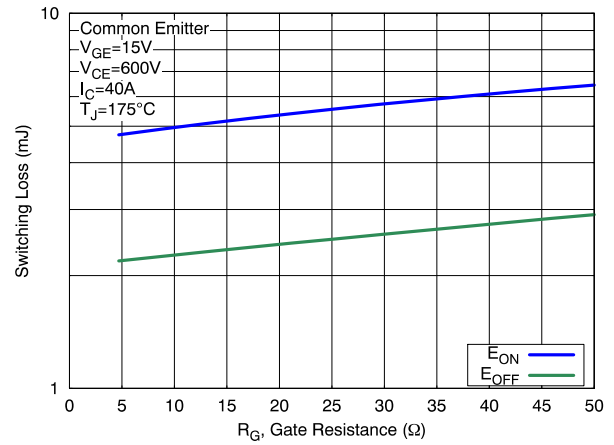


Figure 12. Switching Loss vs Gate Resistance

AFGHL40T120RW-STD

TYPICAL CHARACTERISTICS

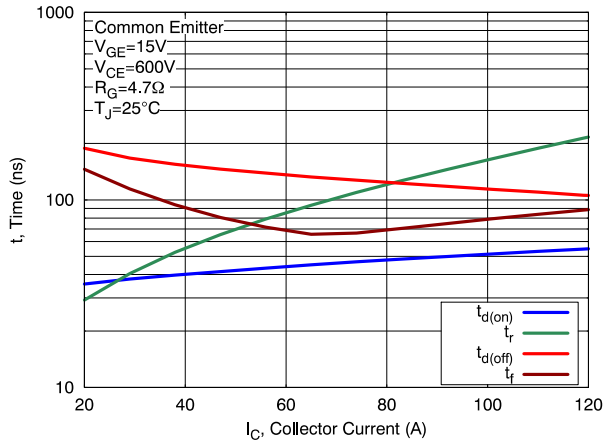


Figure 13. Switching Time vs Collector Current

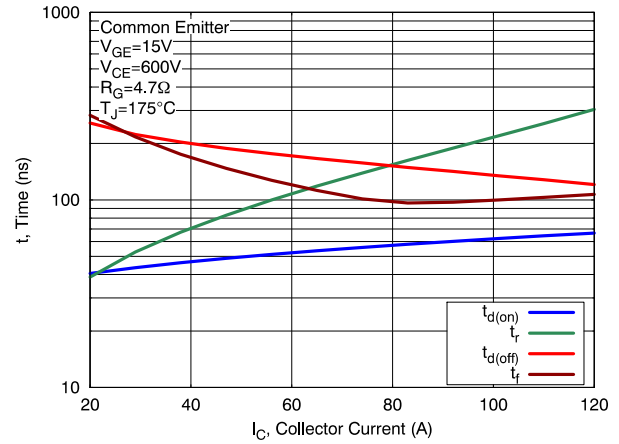


Figure 14. Switching Time vs Collector Current

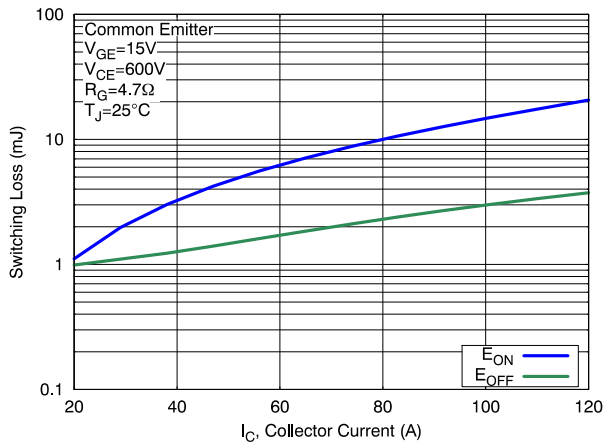


Figure 15. Switching Loss vs Gate Resistance

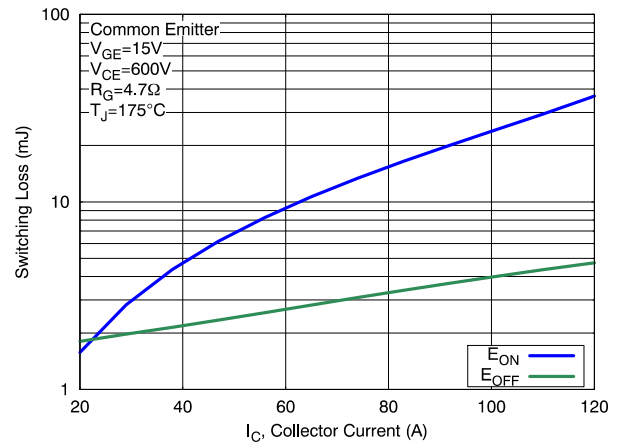


Figure 16. Switching Loss vs Collector Current


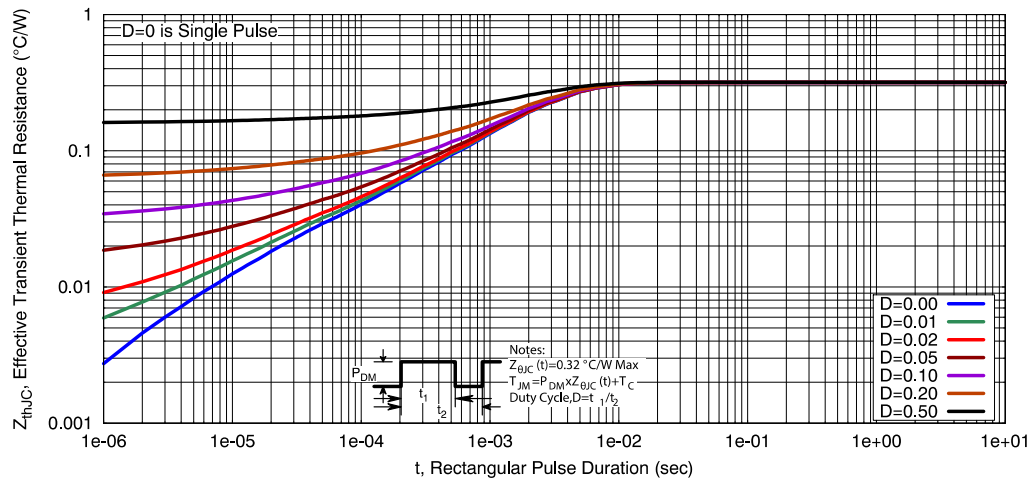


Figure 17. Transient Thermal Impedance of IGBT

TO-247-3LD
CASE 340CX
ISSUE A

DATE 06 JUL 2020

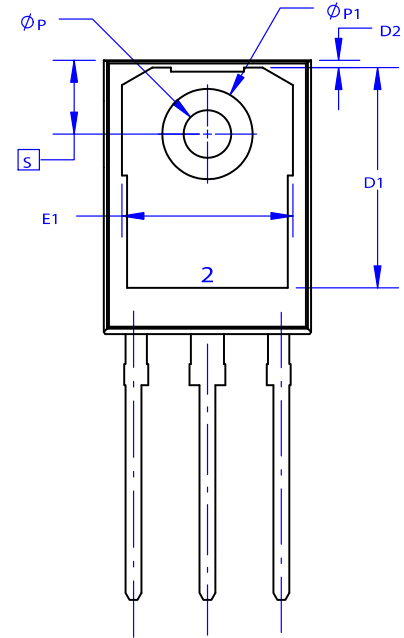

NOTES: UNLESS OTHERWISE SPECIFIED.

- A. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
B. ALL DIMENSIONS ARE IN MILLIMETERS.
C. DRAWING CONFORMS TO ASME Y14.5 - 2009.
D. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
E. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

GENERIC
MARKING DIAGRAM*


XXXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.58	4.70	4.82
A1	2.20	2.40	2.60
A2	1.40	1.50	1.60
D	20.32	20.57	20.82
E	15.37	15.62	15.87
E2	4.96	5.08	5.20
e	~	5.56	~
L	19.75	20.00	20.25
L1	3.69	3.81	3.93
ØP	3.51	3.58	3.65
Q	5.34	5.46	5.58
S	5.34	5.46	5.58
b	1.17	1.26	1.35
b2	1.53	1.65	1.77
b4	2.42	2.54	2.66
c	0.51	0.61	0.71
D1	13.08	~	~
D2	0.51	0.93	1.35
E1	12.81	~	~
ØP1	6.60	6.80	7.00

DOCUMENT NUMBER:	98AON93302G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	TO-247-3LD	PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IGBTs](#) category:

Click to view products by [ON Semiconductor](#) manufacturer:

Other Similar products are found below :

[RGTV00TS65GC13](#) [APT35GP120J](#) [BIDW40N65ES5](#) [BIDW40N65H5](#) [BIDW75N65EH5](#) [BIDW75N65ES5](#) [DIW050F065](#) [DIW030F135](#)
[DIW030M060](#) [DIW040F135](#) [DIW040M120](#) [DIW075M065](#) [AIKBE50N65RF5ATMA1](#) [AIKQB160N75CP2ALSA1](#)
[AIKQB200N75CP2ALSA1](#) [AIKYX120N75CP2ALSA1](#) [AIKYX160N75CP2ALSA1](#) [AIKYX200N75CP2ALSA1](#) [FF1700XTR17IE5DBPSA1](#)
[IGB08N120S7ATMA1](#) [IGB15N120S7ATMA1](#) [IGB03N120S7ATMA1](#) [IKD10N60RC2ATMA1](#) [IKD06N60RC2ATMA1](#)
[IKD04N60RC2ATMA1](#) [IGD03N120S7ATMA1](#) [IGD08N120S7ATMA1](#) [IKD06N65ET6ARMA1](#) [IHW40N65R6XKSA1](#)
[IKQ150N65EH7XKSA1](#) [IKWH100N65EH7XKSA1](#) [IKWH50N65EH7XKSA1](#) [IKWH75N65EH7XKSA1](#) [IKWH40N65EH7XKSA1](#)
[IKWH30N67PR7XKSA1](#) [IKWH70N67PR7XKSA1](#) [IKWH60N67PR7XKSA1](#) [IKWH50N67PR7XKSA1](#) [IKWH40N67PR7XKSA1](#)
[IKY120N75EH7XKSA1](#) [IKY120N65EH7XKSA1](#) [IKY150N65EH7XKSA1](#) [IKY150N75EH7XKSA1](#) [IKZA100N65EH7XKSA1](#)
[IKZA40N65EH7XKSA1](#) [IKZA50N65EH7XKSA1](#) [IKZA75N65EH7XKSA1](#) [IRG4BC10SD-SPBF](#) [IRG4BC20SD-SPBF](#) [IXDN75N120](#)