

Thank you for your interest in **onsemi** products.  
Your technical document begins on the following pages.



## Your Feedback is Important to Us!

Please take a moment to participate in our short survey.  
At **onsemi**, we are dedicated to delivering technical content that best  
meets your needs.

### Help Us Improve – Take the Survey

This survey is intended to collect your feedback, capture any issues you may encounter, and to provide improvements you would like to suggest.

**We look forward to your feedback.**

To learn more about **onsemi**, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

onsemi and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

# 1/4.3-inch 1 MP CMOS Digital Image Sensor with Global Shutter AR0145CS


## Description

The AR0145CS is a 1/4.3-inch CMOS digital image sensor with an active-pixel array of 1280 (H) x 800 (V). It incorporates a new innovative global shutter pixel design optimized for accurate and fast capture of moving scenes. The sensor produces clear, low noise images in both low-light and bright scenes. It includes sophisticated camera functions such as auto exposure control, windowing, row skip mode, column-skip mode, pixel-binning and both video and single frame modes. It is programmable through a simple two-wire serial interface. The AR0145CS produces extraordinarily clear, sharp digital pictures, and its ability to capture both continuous video and single frames makes it the perfect choice for a wide range of applications, including scanning and industrial inspection.

**Table 1. KEY PERFORMANCE PARAMETERS**

Parameter	Typical Value
Optical Format	1/4.3-inch (4.23 mm)
Active Pixels	1280 (H) x 800 (V) not including 8 border pixels on each side
Pixel Size	2.8 $\mu$ m
Color Filter Array	RGB Bayer, Monochrome
Chief Ray Angle	0 or 28°
Shutter Type	Global Shutter
Input Clock Range	10–48 MHz
Output Interface	8/10-bit MIPI, 1/2-lane
Output Data Rate	Maximum Serial Output Data Rate 800 Mbps/lane
Frame Rate Full Resolution	120 fps (10-bit)
Responsivity Monochrome	41.9 ke-/lux*s
SNR <sub>MAX</sub>	37 dB
Dynamic Range	65.3 dB
Supply Voltage I/O Digital Analog	1.8 V 1.2 V 2.8 V
Power Consumption	150 mW (Full Resolution, 120 fps)
Operating Temperature	(-30°C < T <sub>J</sub> < +85 °C)
Optimal Performance Temperature Range	(0°C < T <sub>J</sub> < +60 °C)
Package Options	5.74 x 4.42 mm 47-ball CSP θ <sub>JA</sub> : 31.6 °C/W (Note 1) θ <sub>JB</sub> : 9.5 °C/W Bare Die

1. θ<sub>JA</sub>" is dependent on the customer module design and should not be used for calculating junction temperature.



ODCSP47  
CASE 570CZ

## ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

## Non-NDA Data Sheet

**Interested in what you see?** If you would like more detailed information, please request the full version of our data sheet.

[Request Full Data Sheet](#)

## Features

- Superior Low-light and IR Performance
- 1/2-lane 8/10-bit MIPI
- Automatic Black Level Calibration (ABLC)
- Horizontal and Vertical Mirroring, Windowing and Pixel Binning
- 5 x 5 Statistics Engine for On-chip Auto Exposure Control for Any Programmable Region of Interest (ROI)
- Flexible Control for Row and Column Skip Mode
- On-chip Trigger Mode for Synchronization
- Built in Flash Control
- Two On Chip Phase Lock Loop (PLL)
- Context Switching
- 960 bytes One-time Programmable Memory (OTPM)
- Simple Two-wire Fast-mode + Serial Interface

## Applications

- Bar Code Scanner
- Gesture Recognition
- 3D Scanning
- Positional Tracking
- Iris Scanning
- Augmented Reality
- Virtual Reality
- Biometrics
- Machine Vision

## ORDERING INFORMATION

Table 2. AVAILABLE PART NUMBERS

Part Number	Product Description	Product Attribute Description
AR0145CSSM00SMKA0-CP	Mono, 0° CRA	CSP with Protective Film
AR0145CSSM00SMKAH3-GEVB	Mono, 0° CRA	Demo Board
AR0145CSSM00SMKA0-CP2	Mono, 0° CRA	CSP with Protective Film, MOQ 50 Pieces
AR0145CSSM00SMKA0-CR	Mono, 0° CRA	CSP without Protective Film

AR0145CSSM28SMKA0-CP	Mono, 28° CRA	CSP with Protective Film
AR0145CSSM28SMKA0-CP2	Mono, 28° CRA	CSP with Protective Film, MOQ 50 Pieces
AR0145CSSM28SMKA0-CR	Mono, 28° CRA	CSP without Protective Film
AR0145CSSM28SMKAH3-GEVB	Mono, 28° CRA	Demo Board
PRISM1M-AR0145CSSM130110-GEVB	Mono, 28° CRA	Premier Reference Image Sensor Module (PRISM)

AR0145CS1C00SMKA0-CP-E	RGB, 0° CRA	CSP, with Protective Film, Sample
AR0145CSSC00SMKA0-CP	RGB, 0° CRA	CSP, with Protective Film
AR0145CSSC00SMKA0-CP2	RGB, 0° CRA	CSP, with Protective Film, MOQ 50
AR0145CSSC00SMKA0-CR	RGB, 0° CRA	CSP, without Protective Film
AR0145CSSC00SMKAH3-GEVB	RGB, 0° CRA	Demo Board

AR0145CS1C28SMKA0-CP-E	RGB, 28° CRA	CSP, with Protective Film, Sample
AR0145CSSC28SMKA0-CP	RGB, 28° CRA	CSP, with Protective Film
AR0145CSSC28SMKA0-CP2	RGB, 28° CRA	CSP, with Protective Film, MOQ 50
AR0145CSSC28SMKA0-CR	RGB, 28° CRA	CSP, without Protective Film
AR0145CSSC28SMKAH3-GEVB	RGB, 28° CRA	Demo Board
PRISM1M-AR0145CSSC130110-GEVB	RGB, 28° CRA	Premier Reference Image Sensor Module (PRISM)

NOTE: Refer to AR0145 Die Data Sheet for Die Part Numbers and Ordering Information.

See the **onsemi** Device Nomenclature document ([TND310/D](#)) for a full description of the naming convention used for image sensors. For reference documentation, including information on evaluation kits, please visit our web site at [www.onsemi.com](#).

Table 3. FRAME RATE OF DIFFERENT MODES OF OPERATION

Resolution	Mode	Frame Rate (frames per sec)
Full Resolution 1280 x 800	Master	120
	Slave Integration Start	90
	Slave Integration Time	90
	Slave Integration Start and Readout Start	90
	Slave Integration Start and Integration	depends on exp (not constant frame rate)

Table 3. FRAME RATE OF DIFFERENT MODES OF OPERATION (continued)

Resolution	Mode	Frame Rate (frames per sec)
2x2 Subsampling 640 x 400	Master	230
	Slave Integration Start	160
	Slave Integration Time	160
	Slave Integration Start and Readout Start	160
	Slave Integration Start and Integration	depends on exp (not constant frame rate)



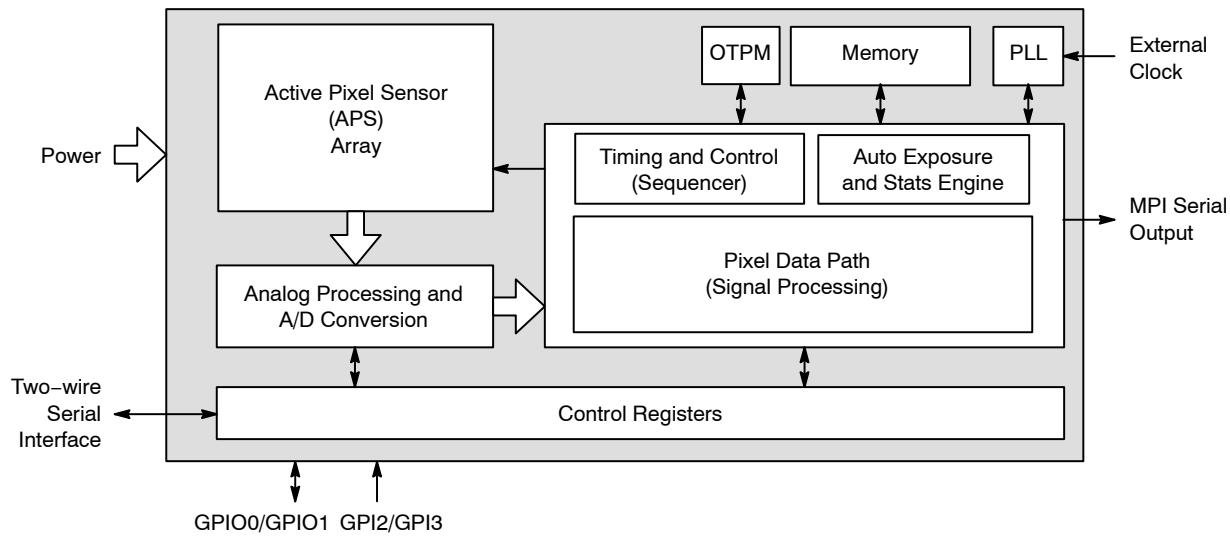


Figure 1. Block Diagram




**ODCSP47 5.74x4.42x0.63, 0.57P**  
CASE 570CZ  
ISSUE B


DATE 20 AUG 2024

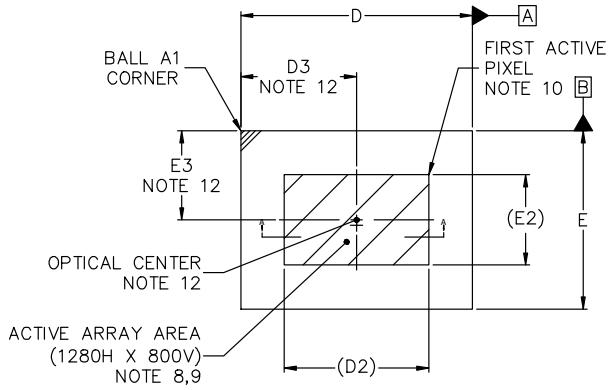


TOP VIEW

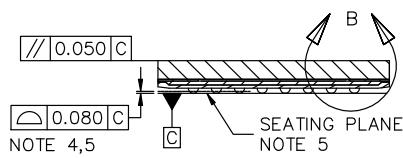

SECTION A-A

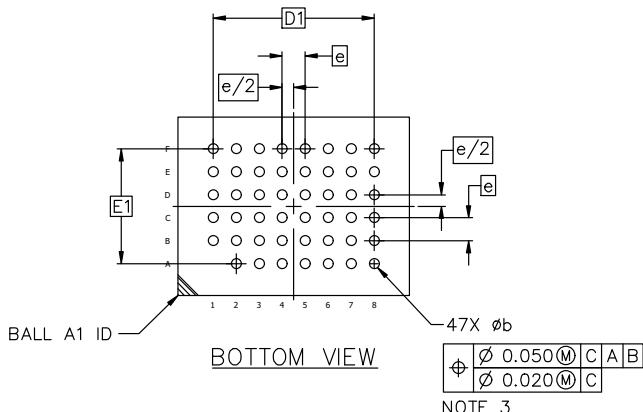


BOTTOM VIEW

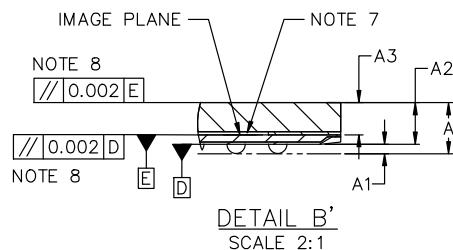

DETAIL B'  
SCALE 2:1

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	-----	-----	0.816
A1	0.100	0.130	0.160
A2	0.581	0.626	0.671
A3	0.420	0.440	0.460
b	0.220	0.250	0.280
D	5.719	5.744	5.769
D1	3.990	BSC	
D2	3.584	REF.	
D3	2.846	2.871	2.896
E	4.391	4.416	4.441
E1	2.850	BSC	
E2	2.240	REF.	
E3	2.050	2.075	2.100
e	0.570	BSC	

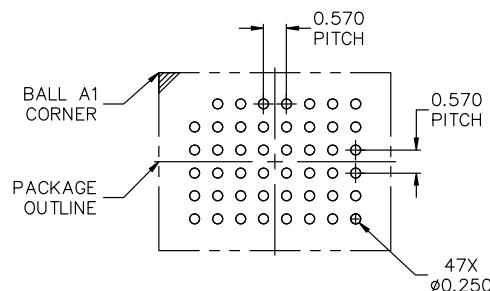

RECOMMENDED MOUNTING FOOTPRINT\*

\*FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOCUMENT NUMBER:	98AON26140H	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	ODCSP47 5.74x4.42x0.63, 0.57P	PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **ONSEMI**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Image Sensors](#) category:***

***Click to view products by [ON Semiconductor](#) manufacturer:***

Other Similar products are found below :

[KAF-4320-AAA-JP-B1](#) [MT9P031I12STM-DR](#) [OV07955-N53V-PE](#) [AP0202AT2L00XPGA0-DR](#) [AR0132AT6M00XPEA0-DPBR](#) [KLI-8023-RAA-ED-AA](#) [NOM02A4-AG01G](#) [NOM02A4-AR03G](#) [AR0130CSSC00SPCA0-DPBR](#) [AR0135CS2C00SUEA0-DRBR](#) [AR0135CS2M00SUEA0-DPBR](#) [AR0144CSSC20SUKA0-CPBR](#) [AR0144CSSM20SUKA0-CPBR](#) [AR0237CSSC12SHRA0-DR](#) [AR0237CSSC12SPRA0-DR](#) [OV10640-N79Y-PF](#) [ASX340AT2C00XPED0-DRBR](#) [AR0144ATSM20XUEA0-DPBR](#) [TCD1209DG\(8Z.W\)](#) [TCD1304DG\(8Z,K\)](#) [TCD1254GFG\(8Z,AA2\)](#) [KAF-0402-ABA-CD-B1](#) [KAF-1603-ABA-CD-B2](#) [AR0330CM1C00SHAA0\\_TP](#) [NOIV1SN1300A-QDC](#) [NOIV2SN1300A-QDC](#) [AR0130CSSC00SPBA0-DR1](#) [DR2X2K7\\_INVAR\\_RGB\\_V6](#) [DR2X4K7\\_INVAR\\_RGB\\_V6](#) [FSM-IMX283C-04G-V2A](#) [FSM-IMX334C-01S-V1A](#) [AP0101AT2L00XPGA0-DR](#) [AR0132AT6C00XPEA0-DRBR1](#) [AR0144CSSC00SUKA0-CPBR2](#) [AR0238CSSC12SHRA0-DP2](#) [AR0330CM1C00SHAA0-DP1](#) [AR0521SR2M09SURA0-DP](#) [AR0521SR2M09SURA0-DP1](#) [ASX340AT2C00XPED0-DPBR2](#) [KAF-50100-AAA-JD-BA](#) [NOIL1SM0300A-QDC](#) [NOIP1FN1300A-QTI](#) [NOIP1SF0480A-STI1](#) [NOIP1SN0300A-QTI](#) [NOIP1SE1300A-QTI](#) [NOIP1SN1300A-QTI](#) [Mira220-2QC1WA 500U FT SE](#) [Mira220-2QI1WA 500U FT SE](#) [Mira220-2QM1WP FT SE](#) [Mira220-2QM1WA FT SE](#)