Type MRCBP4-PM Manual Reset Circuit Breaker Automotive Type III Standard Mini Blade



www.optifuse.com

(619) 593-5050

Specifications:

Mini Blade Manual Reset Type Circuit Breaker

Voltage: 28VDC


Amperage: 5A, 7.5A, 10A, 15A, 20A, 25A, 30A Materials: Thermoplastic – (UL Rated 94-V-0)

Terminals: Tin plated Copper Alloy Testing Standard: SAE J553 Type III Cover is color coded to Amperage Ratings Operating Temperature: -40° C ~ 85° C

Ampere Rated	Interrupt Rating
5A-10A version	100A @ 28 VDC
15A version	150A @ 28 VDC
20A version	200A @ 28 VDC
25A-30A version	300A @ 28 VDC

Part Number	Amperage	Body Color
MRCBP4-PM-5A	5A	Tan
MRCBP4-PM-7.5A	7.5A	Brown
MRCBP4-PM-10A	10A	Red
MRCBP4-PM-15A	15A	Blue
MRCBP4-PM-20A	20A	Yellow
MRCBP4-PM-25A	25A	White
MRCBP4-PM-30A	30A	Green

Mechanical Dimensions: Inches [mm]

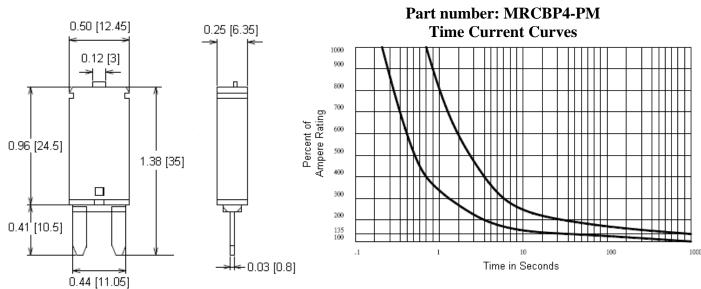

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

-Not intended for submersible water applications.

Note: All specifications subject to change without notice.

Rev A 06/2011 - Page: 1/1 Code B01-01H

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Optifuse manufacturer:

Other Similar products are found below:

FSC-3.5A TSA-250MA BLR-304 BLR-504 BLC-05-GTA BLR-I-504 BLM-304 CBW57-EL4-10A FPK-10A FPK-1A FPK-30A LPM-08 LPX-23B-08R-LOOP FPK-12A FPK-15A FPK-20A FPK-25A FPK-2A FPK-3A FPK-4A FPK-5A FPK-6A FPK-7A FPK-8A FPK-R-1.5A FPK-R-15A FPK-R-1A FPK-R-20A FPK-R-25A FPK-R-2A FPK-R-30A FPK-R-3A FPK-R-4A FPK-R-5A FPK-R-6A FPK-R-8A LPM-01B-12R ACB-12-V-50A LPR-13C-10R ACBP4-PM-5A BLR-306 ACB-12-V-30A CBW57-EL4-5A CBW57-ES-5A CBW57-PS-10A-5X CBW57-PS-3A-1X CBW28-1A FCD-4A