

■ **Features**

- 0.78 Inch Sixty-Four (8x8) Dot Matrix
- Long lifetime operation
- IC compatible
- Low power dissipation
- Black face & white dot


■ **Applications**

- Counting device
- Clock

■ **Absolute Maximum Rating** (Ta=25°C)

Item	Symbol	Value		Unit
		YG/Y/O/R/RA	W/G/B	
DC Forward Current	I _F	20	20	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _t	50	68	mW
Operating Temperature	T _{opr}	-30 ~ +70		°C
Storage Temperature	T _{stg}	-40~ +85		°C
Lead Soldering Temperature(1.6mm from seating plane)	T _{sol}	260°C/5sec		°C

■ **Pictures**



#Pulse width Max.10ms Duty ratio max 1/10

■ **Electrical -Optical Characteristics** (Ta=25°C)

Part Number	Color		V _F (V)			I _R (μA)	I _v (mcd)			λ _D (nm)		
			Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
			I _F =20mA			V _R =5V	I _F =20mA					
OSL640781-AW(BW)	White	W	-	2.9	3.4	20	-	100	-	CCT:8500-18000K		
OSL640781-AB(BB)	Blue	B	-	2.9	3.4	20	-	50	-	460	470	475
OSL640781-AG(BG)	Pure Green	G	-	2.9	3.4	20	-	200	-	515	525	530
OSL640781-AYG(BYG)	Yellow Green	YG	-	2.1	2.5	20	-	12	-	560	570	575
OSL640781-AY(BY)	Yellow	Y	-	2.1	2.5	20	-	60	-	585	590	595
OSL640781-AO(BO)	Orange	O	-	2.1	2.5	20	-	70	-	600	605	610
OSL640781-AR(BR)	Red	R	-	2.1	2.5	20	-	20	-	625	630	640
OSL640781-ARA(BRA)	High Luminance Red	RA	-	2.1	2.5	20	-	100	-	620	625	630



*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of luminous intensity is ±15%



*3 Tolerance of measurements of forward voltage is ±0.1V

■ Package Dimensions and Pin Function

OSL640781-AX

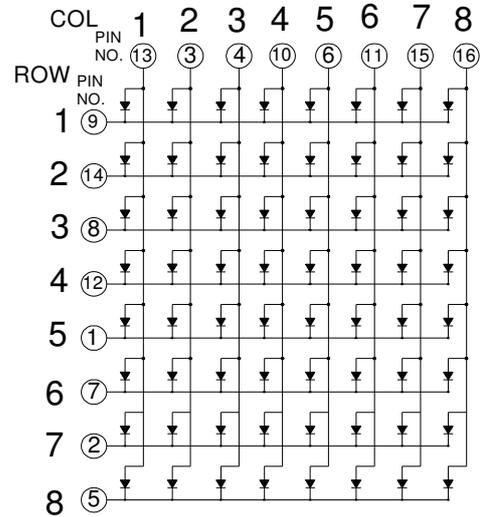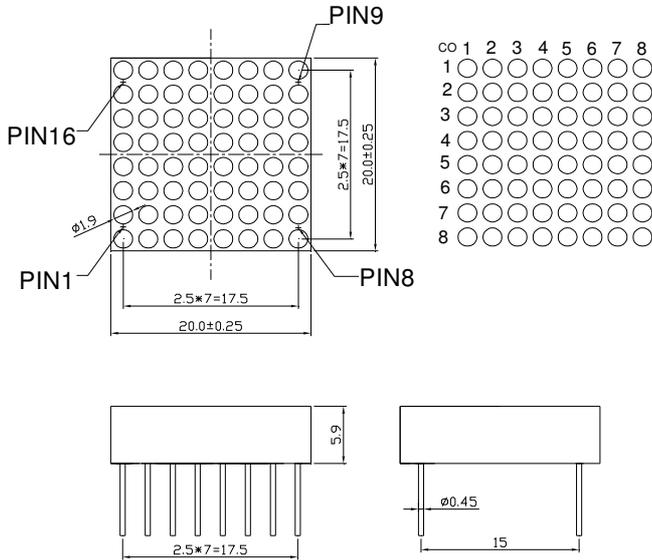

OSL640781-BX

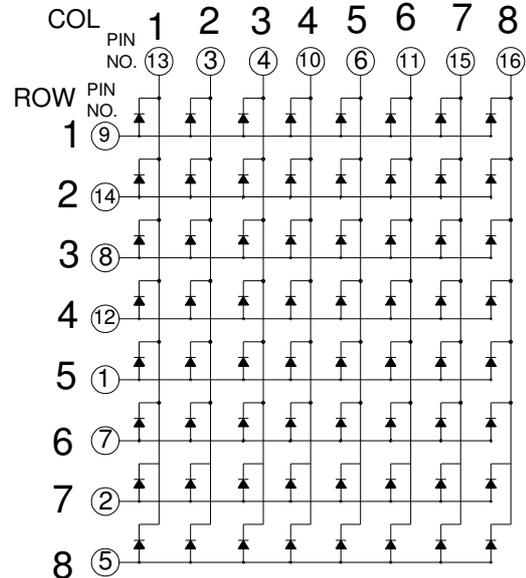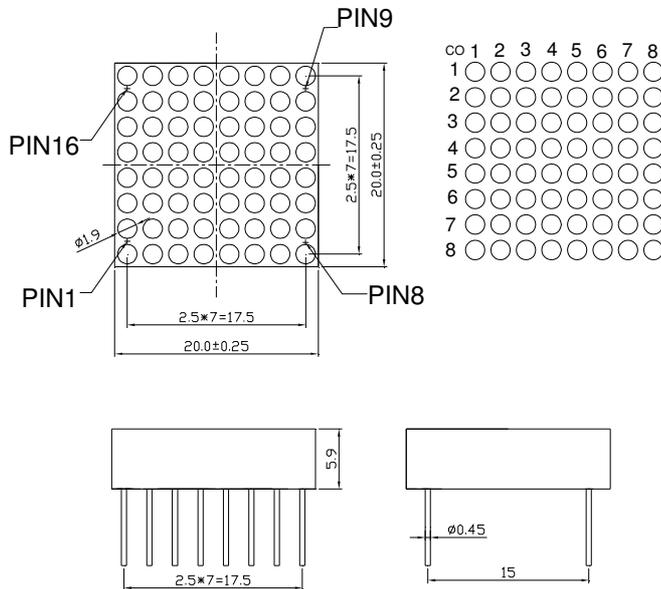

Note:

1, Unit : mm(Tolerance:±0.25mm unless otherwise noted)

2, The slope angle of any PIN may be±5.0°Max

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Displays & Accessories](#) category:

Click to view products by [Optosupply](#) manufacturer:

Other Similar products are found below :

[891-1G02-805](#) [LTC-2721WC](#) [LTM-8522G](#) [SI-B9T151550WW](#) [SI-B9V171550WW](#) [SLDN-32M-G 1624](#) [LTC-4624P](#) [LTP-1057AHR](#) [LTP-3784G-01](#) [LTS-4812SKR-P](#) [LTS-6780P](#) [HV-7W30-6829](#) [DA43-11GWA](#) [LDQ-N3402RI](#) [LDQ-N3606RI](#) [LDS-A3924RI-SI](#) [86004CB830](#)
[LTP-3862JD](#) [LTD-6740P](#) [LTC-4727E](#) [LTS-312AY](#) [LTC-2623E](#) [CC25-12YWA](#) [SLCN-42M-W](#) [LTC-3710G](#) [MHDC2052SRBW](#)
[MHDC4022UBBW](#) [FJ3101DH](#) [FJ3561AH](#) [FJ3104BH](#) [FJ3192AH](#) [FJ5422BH](#) [FJ3121AH red](#) [FJ3191DH](#) [MHDA2551SRBW](#) [A551G1-IN](#)
[B/W](#) [A551LR1-IN B/W](#) [FJ4401DH](#) [FJ2352BH](#) [FJ5121AH](#) [FJ5241BG](#) [FJ5361BB](#) [FJ2481AY 12PIN](#) [FJ8201DH](#) [FJ8201BH](#) [FJ4102DH](#)
[FJ4102AH](#) [FJ4401CH](#) [FJ4102FH](#)