


■Features

- High Luminous LEDs
- 2x4x5mm Rectangular Standard Directivity
- Long Lifetime Operation
- UV Resistant Epoxy
- Water Clear Type

■Applications

- Electronic Signs and Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■Outline Dimension

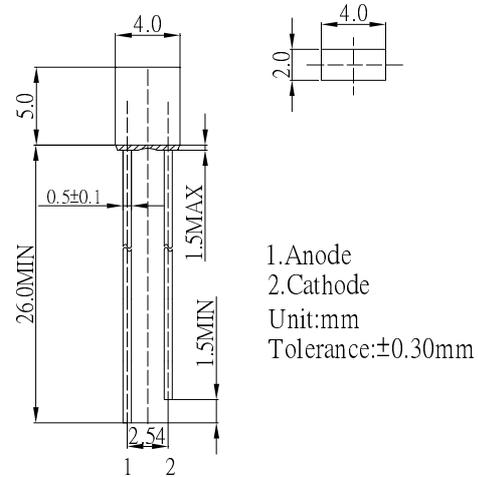

■Absolute Maximum Rating

(Ta=25°C)

Item	Symbo l	Value		Unit
		W/M/B/PG	Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	108	78	mW
Operating Temperature	Topr	-40 ~ +85		°C
Storage Temperature	Tstg	-40~ +85		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-

#Pulse width Max 0.1ms, Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color		V _F (V)*			I _R (μA) Max.	I _v (mcd)*			CCT/λD(nm)*			2θ1/2(deg) Typ.
			Min.	Typ.	Max.		Min.	Typ.	Max.	Min.	Typ.	Max.	
			I _F =20mA			V _R =5V			I _F =20mA				
OSW5DK7YA1B	White	W	-	3.1	3.6	10	1560	2180	-	CCT:8000-18000K			100
OSM5DK7YA1B	Warm White	M	-	3.1	3.6	10	1120	1560	-	CCT:2700-3200K			100
OSB5SA7YA1B	Blue	B	-	3.1	3.6	10	500	750	-	465	470	475	100
OSG5DA7YA1B	Pure Green	PG	-	3.1	3.6	10	1560	2180	-	520	525	530	100
OSY5PA7YA1B	Yellow	Y	-	2.1	2.6	10	750	1120	-	585	590	595	100
OSO5PA7YA1B	Orange	O	-	2.1	2.6	10	750	1120	-	600	605	610	100
OSR5PA7YA1B	Red	R	-	2.1	2.6	10	750	1120	-	620	625	630	100


*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of chromaticity coordinate / CCT is ±10%

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

■Directivity

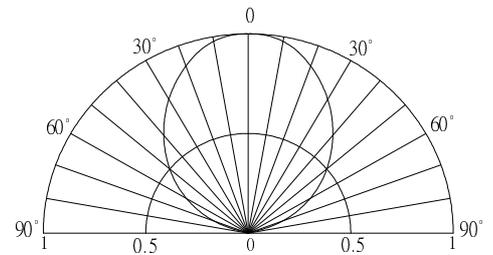

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard LEDs - Through Hole category](#):

Click to view products by [Optosupply manufacturer](#):

Other Similar products are found below :

[LTL-10234W](#) [LTL-10254W](#) [LTL-2231AT](#) [LTL2H3HRKL13](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LW-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [LNX998CKBDA](#) [LP379PPG1C0G0300001](#) [SLR-342DUT32](#) [SLR-342VCT32](#) [SLR-342VCTB7](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [SSS-LX4673ID-410B](#) [1L0532Y24I0TD001](#) [LTL-10224W](#) [LTL-1224A](#) [LTL-403HR](#) [LTL-4231N-0L1](#) [LU7-E-B](#) [4380H1](#) [L53SRC/E-Z](#) [L-7679C1ZGC](#) [4306D23](#) [WP1503SRC/J4](#) [WP153GDT](#) [WP153YDT](#) [WP1543SGC](#) [WP1543SURC](#) [WP7143SEC/H](#) [Z-221A](#) [ZD0172](#) [SLR-332MCT32](#) [SLR-342DU3F](#) [SLR-56MCT32](#) [NSPL500S-F1F2/RS](#) [ZD0154](#) [WP7143ZGC/G](#) [SLA-580LT3F](#) [LTL-4224-032A](#) [LTL-307G-032](#) [LTL1CHKRKP1](#) [LTL-10233WH91](#) [L132XGD](#) [359-8430-0931-502](#) [4302T5-5VLC](#)