


■ Features

- High Luminous LEDs
- 10mm Round Standard Directivity
- Long Lifetime Operation
- UV Resistant Epoxy
- Water Clear Type
- Bi-polar Type

■ Applications

- Electronic Signs And Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ Outline Dimension

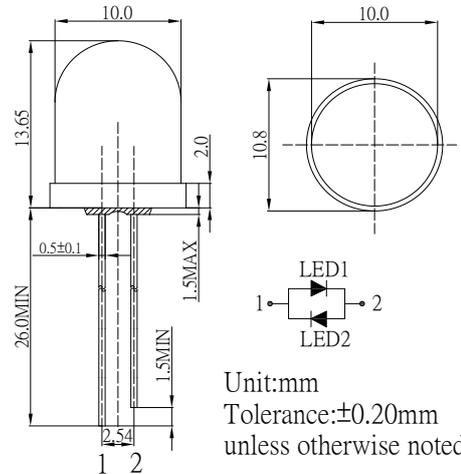


■ Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/BL/PG	O/Y/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	108	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

■ Directivity

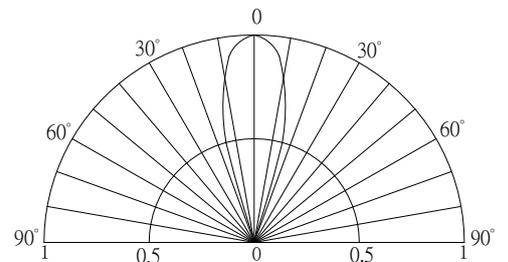

#Pulse width Max.10ms Duty ratio max 1/10

■ Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color		V _F (V)*			I _R (μA)	I _v (mcd)*			Wd(nm)/CCT*			2θ1/2(deg)	
			Min.	Typ.	Max.		Max.	Min.	Typ.	Max.	Min.	Typ.		Max.
			I _F =20mA				V _R =5V	I _F =20mA						
OSWWD2A131A	Pure White	W	-	2.9	3.4	10	8400	10000	-	5500-8500K			30	
OSMMD2A131A	Warm White	M	-	2.9	3.4	10	7000	8400	-	2700-3200K			30	
OSBBS2A131A	Blue	BL	-	2.9	3.4	10	4200	5800	-	465	470	475	30	
OSPPD2A131A	Pure Green	PG	-	2.9	3.4	10	7000	8400	-	520	525	530	30	
OSOOP2A131A	Orange	O	-	2.1	2.6	10	5800	7000	-	6000	605	610	30	
OSYYP2A131A	Yellow	Y	-	2.1	2.6	10	5800	7000	-	585	590	595	30	
OSRRP2A131A	Red	R	-	2.1	2.6	10	5800	7000	-	620	625	630	30	

*1 Tolerance of measurements of chromaticity coordinate/CCT is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Optosupply](#) manufacturer:

Other Similar products are found below :

[OECCDD01-300](#) [OECCDD02-300](#) [OECCDD02-350](#) [OECCDD02-450](#) [OECCDD02-600](#) [OECCDD02-700](#) [OEHW2030GF](#) [OEHW2045GF](#)
[OEHW2060GF](#) [OEHW2090GF](#) [OKLEDT02406A](#) [OKLEDT3050G5V](#) [OKLEDT3050M3V](#) [OKLEDT3050RBV](#) [OKLEDT3050RBW](#)
[OKLEDT3050RPV](#) [OKLEDT3050RPW](#) [OKLEDT3100B5](#) [OKLEDT3100G8](#) [OKLEDT3100M3](#) [OKLEDT3100M4](#) [OKLEDT3100R6](#)
[OKLEDT3100W6](#) [OKLEDT3100WA](#) [OKLEDT3100Y5](#) [OKLEDT31203A](#) [OKLEDT5050G5V](#) [OKLEDT5050G5W](#) [OKLEDT5050RPW](#)
[OKLEDT5050TAV](#) [OKLEDT5050TAW](#) [OKLEDT5050W6P](#) [OKLEDT5050WAV](#) [OKLEDT5050WAW](#) [OKLEDT50606A](#)
[OKLEDT50606B](#) [OKLEDT51005A](#) [OKLEDT5100B5](#) [OKLEDT5100G8](#) [OKLEDT5100M3](#) [OKLEDT5100M4](#) [OKLEDT5100R6](#)
[OKLEDT5100W6](#) [OKLEDT5100WA](#) [OKLEDT5100Y5](#) [OKLEDT51203A](#) [OKLEDT51206A](#) [OKLEDT8050G5W](#) [OKLEDT8050M3V](#)
[OKLEDT8050R5V](#)