



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

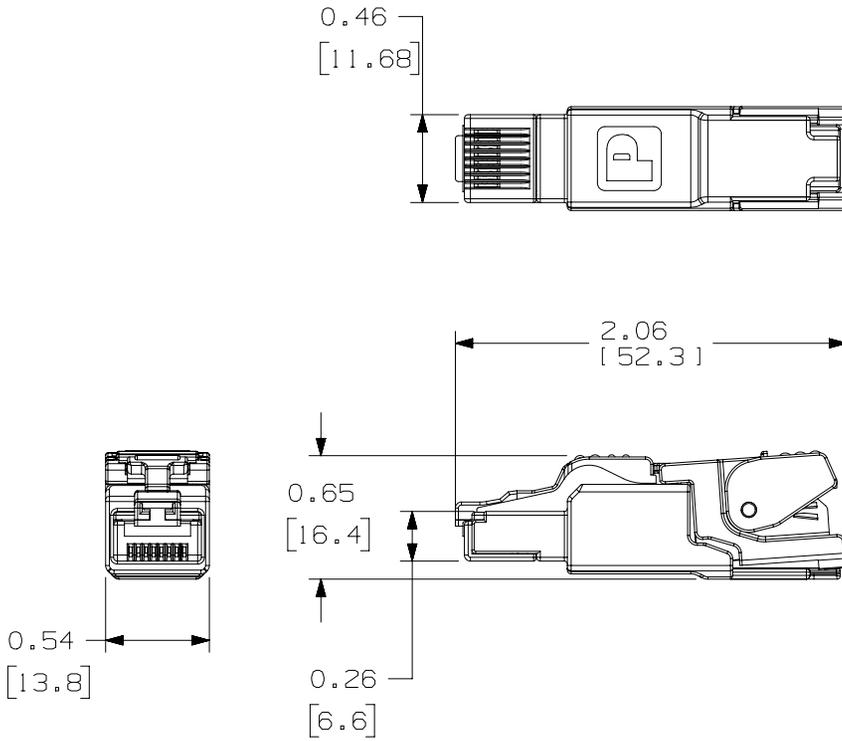

DUST CAP REMOVED  
IN ALL VIEWS

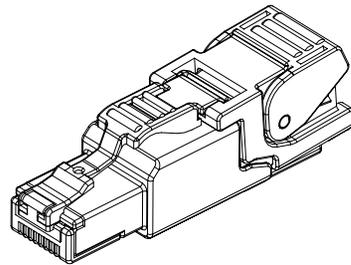

NOTES:


1. CONSTRUCTED TO MEET THE CONNECTOR STANDARD IEC 60603-7.
2. THE TRANSMISSION PERFORMANCE IS 1 GIGABIT ETHERNET AND IS ADEQUATE FOR PoE ACCORDING TO IEEE 802.3af AND PoE ACCORDING TO IEEE 802.3at
3. MEETS THE FOLLOWING CATEGORIES:
  - A. EXCEEDS CHANNEL AND PATCH CORD REQUIREMENTS OF ANSI/TIA-568-C.2 CATEGORY 6 AND CATEGORY 5e, AND ISO 11801 CLASS E AND CLASS D STANDARDS AT SWEPT FREQUENCIES UP TO 250 MHz & 100 MHz RESPECTIVELY AND MEETS ODVA ETHERNET/IP ELECTRICAL AND MECHANICAL PERFORMANCE WHEN INSTALLED WITH OTHER PANDUIT COMPONENTS.
  - B. MEETS THE CHANNEL REQUIREMENTS OF ANSI/TIA-568-C.2 CATEGORY 6A & ISO 11801 2ND EDITION CLASS E, IN A 4-CONNECTOR CONFIGURATION UP TO 100 METERS AT SWEPT FREQUENCIES UP TO 500MHz WHEN INSTALLED WITH OTHER PANDUIT CATEGORY 6A COMPONENTS.
4. CABLE CONSTRUCTION ACCEPTANCE: FOR PART NUMBER: 1SPS688FAS
  - A. CONDUCTOR DIAMETER:
    1. SOLID: 26/1-24/1 AWG, 0.016"-0.020" [0.41MM-0.51MM]
    2. STRANDED: 27/7-24/7 AWG, 0.018"-0.024" [0.46MM-0.61MM]
    3. STRANDED: 26/19 AWG, 0.020" [0.51MM]
  - B. INSULATION DIAMETER: 0.033"-0.039" [0.85MM-1.0MM]
  - C. CABLE DIAMETER: 0.197"-0.354" [5.0MM-9.0MM]
5. CABLE CONSTRUCTION ACCEPTANCE: FOR PART NUMBER: 1SPS688FA
  - A. CONDUCTOR DIAMETERS:
    1. SOLID: 24/1-22/1 AWG, 0.020"-0.025" [0.51MM-0.64MM]
    2. STRANDED: 27/7-22/7 AWG, 0.018"-0.030" [0.46MM-0.76MM]
    3. STRANDED: 24/19-22/19 AWG, 0.024"-0.031" [0.61MM-0.78MM]
  - B. INSULATION DIAMETER: 0.039"-0.063" [1.0MM-1.6MM]
  - C. CABLE DIAMETER: 0.197"-0.354" [5.0MM-9.0MM]
6. CONSTRUCTION:
  - A. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.
  - B. COMPONENT MATERIALS:
    1. CONNECTOR HOUSING: ZINC DIECAST WITH (NI) PLATING
    2. WIRE PRESORTING, CONTACT HOUSING: PC UL 94V-0
    3. HOOK, STRAIN RELIEF LEVER, PROTECTION CAP: PC UL 94V-0
    4. PCB: FR4 UL 94V-0
    5. PIERCING CONTACTS: PHOSPHOR BRONZE (MIN 3.6µm (Sn) PLATED)
    6. SHIELD CONTACT: BRASS 2.5µm (NI); 2.5µm (NI) PLATED
    7. CONTACTS: SPRING STEEL
    8. CONTACT FINISH: MINIMUM 0.8µm (AU) ON 1.2µm (NI)
7. ENVIRONMENTAL:
  - A. OPERATING TEMPERATURE: -40° F TO +185° F [-40° C TO +85° C]
  - B. STORAGE TEMPERATURE: -40° F TO +185° F [-40° C TO +85° C]
  - C. INGRESS PROTECTION RATING (IP): IP20
8. c(UL)us MEETS UL1863, CSA 22.2.
9. MEETS OR EXCEEDS ANSI/TIA-568-C.2 CATEGORY 6A/ISO 11801 CLASS E, PATCH CORD REQUIREMENTS WHEN USED WITH PSM7004 PANDUIT CABLE
10. WEIGHT:
  - A. COMPLETE PLUG - 0.42 LBS/10 PCS (189.32g/10PCS) WITHOUT PROTECTIVE CAP.
  - B. WIRE MANAGER ONLY - 0.07LBS/10PCS (35.00g/10PCS).

PART NUMBER SEE TABLE 1, SHEET 2		PRODUCT SPEC/PKG SPEC N/A	
I.T. NUMBER N/A		WORK INSTRUCTION N/A	
TITLE <b>FIELD TERMINABLE CATEGORY 6A SHIELDED RJ45 PLUG CONNECTORS AND WIRE MANAGERS</b>			
CUSTOMER DRAWING			
ITEM REVISION NAME 13M438AA/02		<b>PANDUIT</b>	
DATASET FILE NAME 13M438AA_DC02/02A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:  SEE NOTES	
.x ± .1 [2.54]      .xxx ± .005 [0.127]		DRAWING NUMBER: 13M438AA-02	
.xx ± .01 [0.25]      ANGLES ± 5 °			
		THIRD ANGLE PROJECTION	
DRAWN BY BJN	DATE 1-14-14	CHK DCS	SCALE NONE
REV		SHT 1 OF 2	
DESCRIPTION		SIZE A	



D10100DA/14

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PIN ASSIGNMENT T568A  
ACCORDING TO TIA-568-C.2

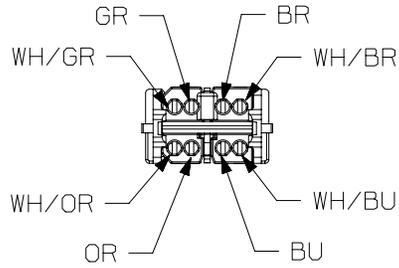

PIN ASSIGNMENT T568B  
ACCORDING TO TIA-568-C.2

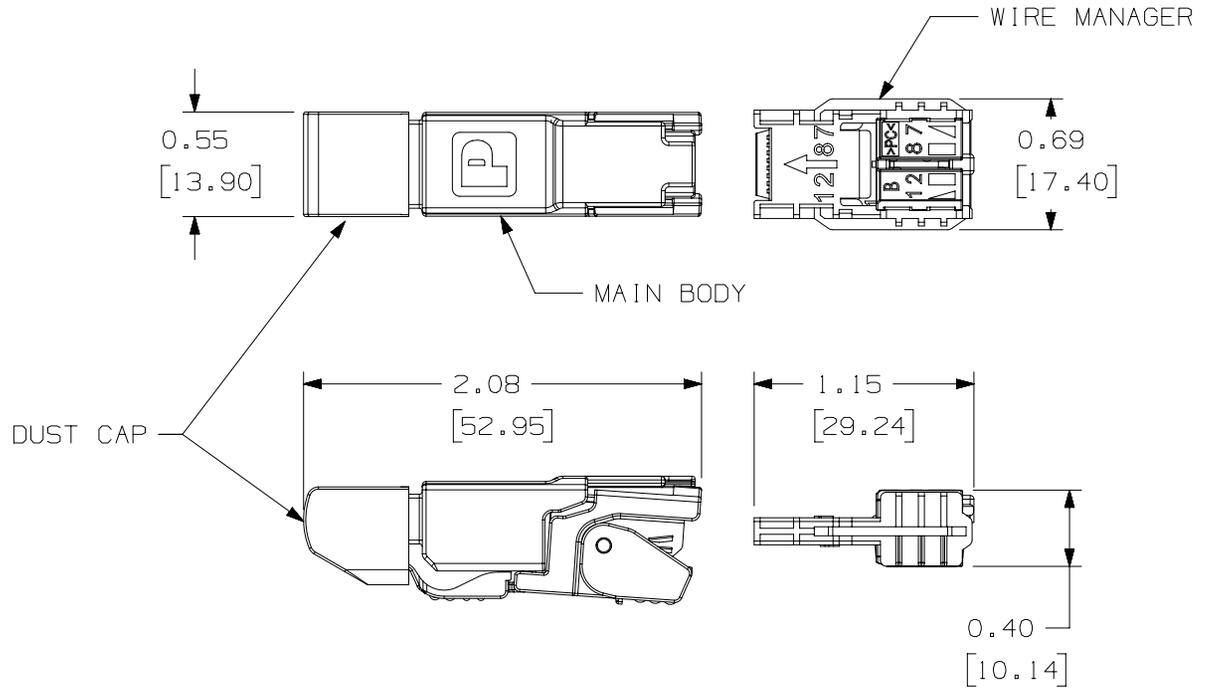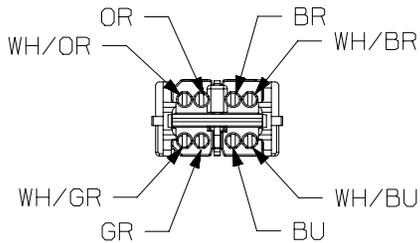

DUST CAP SHOWN IN ABOVE VIEWS

TABLE 1

PART NUMBERS

COMPLETE ASSEMBLY		WIRE MANAGER (ONLY)	
I SPS688FA		I SPS688FA - WM	
I SPS688FAS		I SPS688FAS - WM	

PART NUMBER SEE TABLE 1		PRODUCT SPEC/PKG SPEC N/A	
I.T. NUMBER N/A		WORK INSTRUCTION N/A	
TITLE <b>FIELD TERMINABLE CATEGORY 6A SHIELDED RJ45 PLUG CONNECTORS AND WIRE MANAGERS</b> CUSTOMER DRAWING			
ITEM REVISION NAME 13M438AA/02		<b>PANDUIT</b>	
DATASET FILE NAME 13M438AA_DC02/02A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES ON SHEET 1	
.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °		DRAWING NUMBER: 13M438AA-02	
THIRD ANGLE PROJECTION		SHT 2 OF 2	
DRAWN BY BJN	DATE 1-14-14	CHK DCS	SCALE NONE
REV		SIZE A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
5	9-23-15	MDJR	DCS	GAZ	SEE SHEET 1 FOR REVISION HISTORY	13M438AA-02
4	7-16-14	BJN	DCS	GAZ	SEE SHEET 1 FOR REVISION HISTORY	13M438AA-02

D10100DA/14

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors / Ethernet Connectors](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [E5908-15A242-L](#) [155302-001](#) [AX100653](#)