

# STRONGHOLD™


CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

# STRONGHOLD™

CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

## Panduit Corporate World Headquarters

Tinley Park, Illinois 60487

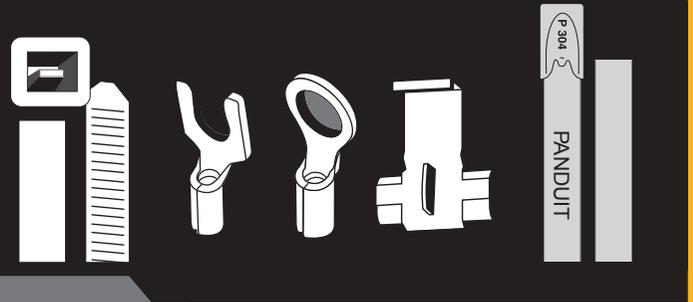

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300

## Commercial Construction Pocket Guide

© 2018 Panduit Corp.  
ALL RIGHTS RESERVED  
Printed in the U.S.A.  
Catalog Number **CMCB02-SA-ENG**  
Replaces WACB24-SA-ENG  
9/2018

# PANDUIT®

## Contractor Grade Solutions for Electrical and Networking Installations

Panduit is committed to providing our contractor partners a comprehensive portfolio of products, programs, and services to help increase job site productivity, improve back-office operations, and accelerate cash flow. Our collaborative approach addresses the greatest business challenges for the contractor community, and provides a competitive advantage in your market space.

### Solutions

- Whether the solution is for electrical or networking systems, Panduit offers a unique understanding of the complexities of infrastructure construction
- We continually offer new application systems focused on meeting the ever-changing installation and maintenance needs of our customers

### Programs\*

- The Panduit Business Partner Program offers a variety of benefits designed to help increase effectiveness, address the business needs of customers, and grow overall profitability
- A prescriptive planning and inventory management program that provides visibility throughout all levels of the supply chain to increase service levels and keep projects on schedule

### Services

- The Mobile Access Guide immediately provides information required to keep your project moving when working on-site or from most any remote location
- Extensive website with product specifications, installation guides, part drawings and more, to make your job easier
- World-class customer service and product availability keep your projects on time and within budget

# STRONGHOLD™

CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

\*For complete program details, go to [www.panduit.com](http://www.panduit.com) or contact Customer Service at 800.777.3300. All programs and benefits subject to terms and conditions.

## **StrongHold™ Electrical/Network Supports and Fasteners**

Panduit electrical/network supports and fasteners provide a reliable, high-quality solution for routing and securing power and communication cabling within commercial and industrial facilities.

StrongHold™ Supports and Fasteners are designed to meet the regulatory requirements of NFPA 70 (National Electric Code), UL standards, and other USA/Canadian building codes.



|  |                   |
|--|-------------------|
| <b>A. StrongHold™ Cable Ties</b> . . . . .                 | <b>A.1 – A.6</b>  |
| <b>B. StrongHold™ Stainless Steel Cable Ties</b> . . . . . | <b>B.1 – B.8</b>  |
| <b>C. StrongHold™ Terminals</b> . . . . .                  | <b>C.1 – C.8</b>  |
| <b>D. StrongHold™ Cable/Conduit</b> . . . . .              | <b>D.1 – D.19</b> |
| <b>E. StrongHold™ Beam/Purlin</b> . . . . .                | <b>E.1 – E.12</b> |
| <b>F. StrongHold™ Hangers/Hanging Systems</b> . . . . .    | <b>F.1 – F.2</b>  |
| <b>G. StrongHold™ Stud Wall</b> . . . . .                  | <b>G.1 – G.18</b> |
| <b>H. StrongHold™ Communication/Low Voltage</b> . . . . .  | <b>H.1 – H.16</b> |
| <b>I. StrongHold™ Dry Wall</b> . . . . .                   | <b>I.1 – I.2</b>  |
| <b>J. StrongHold™ Acoustical</b> . . . . .                 | <b>J.1 – J.10</b> |
| <b>K. StrongHold™ Cabling System</b> . . . . .             | <b>K.1 – K.16</b> |
| <b>L. Miscellaneous</b> . . . . .                          | <b>L.1 – L.4</b>  |
| <b>M. Convenient Sizing Information</b> . . . . .          | <b>M.1 – M.8</b>  |
| <b>N. Codes and Standards</b> . . . . .                    | <b>N1 – N.20</b>  |
| <b>O. Index</b> . . . . .                                  | <b>0.1 – 0.7</b>  |

# STRONGHOLD™

CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

**STRONGHOLD™**

## Cable Ties

Panduit offers a comprehensive selection of cable tie solutions ideal for electrical, industrial, and networking applications. Panduit® Pan-Ty® Cable Ties are the premium grade offering, designed to accommodate a variety of industry requirements suitable for OEM and demanding MRO environments. For contractors seeking an economical solution to satisfy general purpose applications, the Panduit® StrongHold™ Cable Ties will meet this need with an assortment of indoor and outdoor cable ties.



## StrongHold™ Contractor Grade Cable Ties



### Application Environments

#### 95+ Part Numbers

- Suitable for general purpose, light commercial, contractor, residential and HVAC applications
- No controlled tension during installation (not for use with cable tie installation tool)



### Product Offering

#### Materials/Environment

- Nylon 6.6 in natural and in UV weather resistant black
  - Suitable for Premium spaces
  - Black UV suitable for outdoor use

#### Tie Construction (Cross-Sectional Area)

- Available in Miniature, Intermediate, Standard, Light Heavy, and Heavy
  - Loop tensile strength 18, 40, 50, 120 and 175 lbs.
  - Tie lengths 3.9" to 48.0"
  - Bundle diameters to 14.3"

#### Operating Temperature

- -40°C to 85°C



### Compliance Ratings

cULus Listed to UL 62275 Type 2,21



### Project Based Pricing

—



### Application Support

—



### Pricing

Value Price Model




| Standard Part Number           |  | Bulk Part Number               |  | Length (in.) |  |
|--------------------------------|--|--------------------------------|--|--------------|--|
| Natural Nylon 6.6 (Indoor Use) | UV Weather Resistant Nylon 6.6 (Outdoor Use) | Natural Nylon 6.6 (Indoor Use) | UV Weather Resistant Nylon 6.6 (Outdoor Use) |              |  |
| <b>Cable Ties, 18 lbs</b>      |  |                                |  |              |  |
| S4-18-C                        | S4-18-C0                                     | S4-18-M                        | S4-18-M0                                     | 3.94         |  |
| S6-18-C                        | S6-18-C0                                     | S6-18-M                        | S6-18-M0                                     | 6.30         |  |
| S8-18-C                        | S8-18-C0                                     | S8-18-M                        | S8-18-M0                                     | 7.87         |  |
| <b>Cable Ties, 40 lbs</b>      |  |                                |  |              |  |
| S6-40-C                        | S6-40-C0                                     | S6-40-M                        | S6-40-M0                                     | 5.51         |  |
| S8-40-C                        | S8-40-C0                                     | S8-40-M                        | S8-40-M0                                     | 7.87         |  |
| S12-40-C                       | S12-40-C0                                    | S12-40-M                       | S12-40-M0                                    | 11.81        |  |
| S15-40-C                       | S15-40-C0                                    | -                              | -  | 14.57        |  |
| <b>Cable Ties, 50 lbs</b>      |  |                                |  |              |  |
| S5-50-C                        | S5-50-C0                                     | S5-50-M                        | S5-50-M0                                     | 4.72         |  |
| S6-50-C                        | S6-50-C0                                     | S6-50-M                        | S6-50-M0                                     | 6.30         |  |
| S7-50-C                        | S7-50-C0                                     | S7-50-M                        | S7-50-M0                                     | 7.40         |  |
| S8-50-C                        | S8-50-C0                                     | S8-50-M                        | S8-50-M0                                     | 8.46         |  |
| S10-50-C                       | S10-50-C0                                    | -                              | -  | 9.84         |  |
| S12-50-C                       | S12-50-C0                                    | S12-50-M                       | S12-50-M0                                    | 11.81        |  |
| S15-50-C                       | S15-50-C0                                    | S15-50-M                       | S15-50-M0                                    | 14.57        |  |
| S17-50-C                       | S17-50-C0                                    | S17-50-M                       | S17-50-M0                                    | 16.9         |  |
| S21-50-C                       | S21-50-C0                                    | S21-50-M                       | S21-50-M0                                    | 20.87        |  |

# StrongHold™ Cable Tie Part Numbers



|                           | Max. Bundle Diameter (in.) | Width (in.) | Min. Loop Tensile Strength (Lbs) | Std. Pkg. Qty | Blk. Pkg. Qty |
|---------------------------|----------------------------|-------------|----------------------------------|---------------|---------------|
| <b>Cable Ties, 18 lbs</b> |                            |             |                                  |               |               |
|                           | 0.87                       | 0.10        | 18                               | 100           | 1000          |
|                           | 1.57                       | 0.10        | 18                               | 100           | 1000          |
|                           | 2.09                       | 0.10        | 18                               | 100           | 1000          |
| <b>Cable Ties, 40 lbs</b> |                            |             |                                  |               |               |
|                           | 1.30                       | 0.14        | 40                               | 100           | 1000          |
|                           | 2.09                       | 0.14        | 40                               | 100           | 1000          |
|                           | 2.99                       | 0.14        | 40                               | 100           | 1000          |
|                           | 4.02                       | 0.14        | 40                               | 100           | -             |
| <b>Cable Ties, 50 lbs</b> |                            |             |                                  |               |               |
|                           | 0.94                       | 0.19        | 50                               | 100           | 1000          |
|                           | 1.50                       | 0.19        | 50                               | 100           | 1000          |
|                           | 1.81                       | 0.19        | 50                               | 100           | 1000          |
|                           | 2.09                       | 0.19        | 50                               | 100           | 1000          |
|                           | 1.97                       | 0.19        | 50                               | 100           | -             |
|                           | 2.99                       | 0.19        | 50                               | 100           | 1000          |
|                           | 4.02                       | 0.19        | 50                               | 100           | 1000          |
|                           | 4.33                       | 0.19        | 50                               | 100           | 1000          |
|                           | 5.51                       | 0.19        | 50                               | 100           | 1000          |

\* UL Recognized. \*\*UL 181. ° Mount with #10/M5 Screw. °° Mount with ¼"/M6 Screw.  
 \* Plenum Rated AH-2. ^ Gray Nylon Available S-48-175-L8



| Standard Part Number                    |  | Bulk Part Number               |  | Length (In.) |  |
|---|--|--------------------------------|--|--------------|--|
| Natural Nylon 6.6 (Indoor Use)          | UV Weather Resistant Nylon 6.6 (Outdoor Use) | Natural Nylon 6.6 (Indoor Use) | UV Weather Resistant Nylon 6.6 (Outdoor Use) |              |  |
| <b>Cable Ties, Releasable, 50 lbs</b>   |  |                                |  |              |  |
| SC8-50-S10-C                            | SC8-50-S10-C0                                | -                              | -  | 7.87         |  |
| <b>Cable Ties, Clamp Style, 50 lbs</b>  |  |                                |  |              |  |
| SC8-50-S10-C                            | SC8-50-S10-C0                                | -                              | -  | 7.87         |  |
| <b>Cable Ties, 120 lbs</b>              |  |                                |  |              |  |
| S14-120-L                               | S14-120-L0                                   | S14-120-TL                     | S14-120-TL0                                  | 14.49        |  |
| S18-120-L                               | S18-120-L0                                   | -                              | -  | 17.71        |  |
| S21-120-L                               | S21-120-L0                                   | S21-120-C                      | S21-120-C0                                   | 20.98        |  |
| S24-120-Q                               | S24-120-Q0                                   | S24-120-L                      | S24-120-L0                                   | 23.62        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| <b>Cable Ties, Clamp Style, 120 lbs</b> |  |                                |  |              |  |
| SC15-120-S25-L                          | SC15-120-S25-L0                              | -                              | -  | 14.96        |  |
| <b>Cable Ties, Clamp Style, 175 lbs</b> |  |                                |  |              |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |
| S30-120-X                               | S30-120-X0                                   | S30-120-L                      | S30-120-L0                                   | 29.53        |  |

\* UL Recognized. \*\*UL 181. ° Mount with #10/M5 Screw. °° Mount with ¼"/M6 Screw.

\* Plenum Rated AH-2. ^ Gray Nylon Available S-48-175-L8

# StrongHold™ Cable Tie Part Numbers



|   | Max. Bundle Diameter (In.) | Width (in.) | Min. Loop Tensile Strength (Lbs) | Std. Pkg. Qty | Blk. Pkg. Qty |
|---|----------------------------|-------------|----------------------------------|---------------|---------------|
| <b>Cable Ties, Releasable, 50 lbs</b>   |                            |             |                                  |               |               |
|   | 1.97                       | 0.19        | 50                               | 100           | -             |
| <b>Cable Ties, Clamp Style, 50 lbs</b>  |                            |             |                                  |               |               |
|   | 1.97                       | 0.19        | 50                               | 100           | -             |
| <b>Cable Ties, 120 lbs</b>              |                            |             |                                  |               |               |
|   | 4.02                       | 0.30        | 120                              | 50            | 250           |
|   | 5.20                       | 0.30        | 120                              | 50            | -             |
|   | 5.51                       | 0.30        | 120                              | 50            | 100           |
|   | 6.69                       | 0.30        | 120                              | 25            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
| <b>Cable Ties, Clamp Style, 120 lbs</b> |                            |             |                                  |               |               |
|   | 3.86                       | 0.30        | 120                              | 50            | -             |
| <b>Cable Ties, Clamp Style, 175 lbs</b> |                            |             |                                  |               |               |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |
|   | 8.58                       | 0.30        | 120                              | 10            | 50            |


\* UL Recognized. \*\*UL 181. ° Mount with #10/M5 Screw. °° Mount with ¼"/M6 Screw.

ˆ Plenum Rated AH-2. ^ Gray Nylon Available S-48-175-L8

**STRONGHOLD™**

# Stainless Steel Cable Ties

Panduit offers a comprehensive offering of Stainless Steel Cable Ties including Self-Locking, Fully Coated, Metal Strapping and buckles.

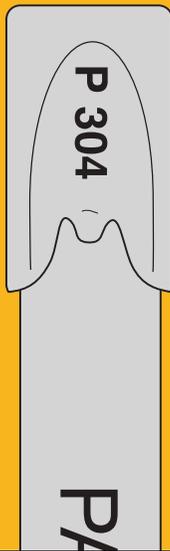

PANDUIT

## StrongHold™ Stainless Steel Cable Ties



### Application Environments

**66+ Part Numbers**

**Suitable for the following verticals:**

- Chemical Plants and Refineries
- Industrial Construction
- Mining
- Oil and Gas
- MRO
- Shipbuilding
- General Applications requiring Cable Management



### Product Offering

**Materials/Environment**

**IMLTs:**

Available in AISI 304 stainless steel for general purpose applications and AISI 316L stainless steel for the most corrosive environments

**MLTFCs:**

Epoxy polyester coating available in black only

Made in China with non-DFARS Steel

**Tie Construction (Cross-Sectional Area)**

Available in standard and heavy

**Loop Tensile Strength:**

100 to 200 Lbs. (445 to 890N)



### Product Availability

Available on request 8-10 week lead time




### Application Support

—




### Pricing

Value Price Model




| Part Number                                | Material | Max Bundle Diameter (mm) | Min Bundle Diameter (mm) | Min Loop Tensile Strength (N) | Length (mm)* | Width (mm) |
|--|----------|--------------------------|--------------------------|-------------------------------|--------------|------------|
| <b>StrongHold™ Self-Locking Cable Ties</b> |          |                          |                          |                               |              |            |
| IMLT25S-C                                  | 304      | 25                       | 12.7                     | 556                           | 127          | 4.6        |
| IMLT51S-C                                  | 304      | 51                       | 12.7                     | 556                           | 201          | 4.6        |
| IMLT69S-C                                  | 304      | 69                       | 12.7                     | 556                           | 259          | 4.6        |
| IMLT102S-C                                 | 304      | 102                      | 12.7                     | 556                           | 362          | 4.6        |
| IMLT152S-C                                 | 304      | 152                      | 12.7                     | 556                           | 521          | 4.6        |
| IMLT203S-C                                 | 304      | 203                      | 12.7                     | 556                           | 679          | 4.6        |
| IMLT254S-C                                 | 304      | 254                      | 12.7                     | 556                           | 838          | 4.6        |
| IMLT304S-Q                                 | 304      | 304                      | 12.7                     | 556                           | 998          | 4.6        |
| IMLT355S-Q                                 | 304      | 355                      | 12.7                     | 556                           | 1156         | 4.6        |
| IMLT380S-Q                                 | 304      | 380                      | 12.7                     | 556                           | 1250         | 4.6        |
| IMLT25S-C6L                                | 316L     | 25                       | 12.7                     | 556                           | 127          | 4.6        |
| IMLT51S-C6L                                | 316L     | 51                       | 12.7                     | 556                           | 201          | 4.6        |
| IMLT69S-C6L                                | 316L     | 69                       | 12.7                     | 556                           | 259          | 4.6        |
| IMLT102S-C6L                               | 316L     | 102                      | 12.7                     | 556                           | 362          | 4.6        |
| IMLT152S-C6L                               | 316L     | 152                      | 12.7                     | 556                           | 521          | 4.6        |
| IMLT203S-C6L                               | 316L     | 203                      | 12.7                     | 556                           | 679          | 4.6        |
| IMLT254S-C6L                               | 316L     | 254                      | 12.7                     | 556                           | 838          | 4.6        |
| IMLT304S-Q6L                               | 316L     | 304                      | 12.7                     | 556                           | 998          | 4.6        |
| IMLT355S-Q6L                               | 316L     | 355                      | 12.7                     | 556                           | 1156         | 4.6        |
| IMLT380S-Q6L                               | 316L     | 380                      | 12.7                     | 556                           | 1250         | 4.6        |
| IMLT51H-L                                  | 304      | 51                       | 12.7                     | 890                           | 201          | 7.9        |
| IMLT69H-L                                  | 304      | 69                       | 12.7                     | 890                           | 259          | 7.9        |
| IMLT102H-L                                 | 304      | 102                      | 12.7                     | 890                           | 362          | 7.9        |
| IMLT152H-L                                 | 304      | 152                      | 12.7                     | 890                           | 521          | 7.9        |
| IMLT203H-L                                 | 304      | 203                      | 12.7                     | 890                           | 679          | 7.9        |
| IMLT254H-L                                 | 304      | 254                      | 12.7                     | 890                           | 838          | 7.9        |
| IMLT304H-Q                                 | 304      | 304                      | 12.7                     | 890                           | 998          | 7.9        |
| IMLT355H-Q                                 | 304      | 355                      | 12.7                     | 890                           | 1156         | 7.9        |
| IMLT51H-L6L                                | 316L     | 51                       | 12.7                     | 890                           | 201          | 7.9        |
| IMLT69H-L6L                                | 316L     | 69                       | 12.7                     | 890                           | 259          | 7.9        |
| IMLT102H-L6L                               | 316L     | 102                      | 12.7                     | 890                           | 362          | 7.9        |
| IMLT152H-L6L                               | 316L     | 152                      | 12.7                     | 890                           | 521          | 7.9        |
| IMLT203H-L6L                               | 316L     | 203                      | 12.7                     | 890                           | 679          | 7.9        |
| IMLT254H-L6L                               | 316L     | 254                      | 12.7                     | 890                           | 838          | 7.9        |
| IMLT304H-Q6L                               | 316L     | 304                      | 12.7                     | 890                           | 998          | 7.9        |
| IMLT355H-Q6L                               | 316L     | 355                      | 12.7                     | 890                           | 1156         | 7.9        |

# StrongHold™ Stainless Steel Cable Tie Part Numbers




| Thickness (mm)                             | Recommended Tool                   | Std Pkg Qty | Std Ctn Qty |
|--|------------------------------------|-------------|-------------|
| <b>StrongHold™ Self-Locking Cable Ties</b> |                                    |             |             |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT        | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 25          | 125         |
| 0.25                                       | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 25          | 125         |




| Part Number   | Material | Max Bundle Diameter (mm) | Min Bundle Diameter (mm) | Min Loop Tensile Strength (N) | Length (mm) | Width (mm) |  |
|---|----------|--------------------------|--------------------------|-------------------------------|-------------|------------|--|
| <b>StrongHold™ Self-Locking Fully Coated Cable Ties</b> |          |                          |                          |                               |             |            |  |
| IMLTFC38S-C6L   | 316L     | 38                       | 12.7                     | 445                           | 158         | 4.6        |  |
| IMLTFC51S-C6L   | 316L     | 51                       | 12.7                     | 445                           | 201         | 4.6        |  |
| IMLTFC64S-C6L   | 316L     | 64                       | 12.7                     | 445                           | 233         | 4.6        |  |
| IMLTFC86S-C6L   | 316L     | 86                       | 12.7                     | 445                           | 310         | 4.6        |  |
| IMLTFC102S-C6L  | 316L     | 102                      | 12.7                     | 445                           | 362         | 4.6        |  |
| IMLTFC137S-C6L  | 316L     | 137                      | 12.7                     | 445                           | 462         | 4.6        |  |
| IMLTFC152S-C6L  | 316L     | 152                      | 12.7                     | 445                           | 521         | 4.6        |  |
| IMLTFC203S-C6L  | 316L     | 203                      | 12.7                     | 445                           | 679         | 4.6        |  |
| IMLTFC38H-C6L   | 316L     | 38                       | 12.7                     | 890                           | 158         | 7.9        |  |
| IMLTFC51H-L6L   | 316L     | 51                       | 12.7                     | 890                           | 201         | 7.9        |  |
| IMLTFC64H-C6L   | 316L     | 64                       | 12.7                     | 890                           | 233         | 7.9        |  |
| IMLTFC69H-L6L   | 316L     | 69                       | 12.7                     | 890                           | 259         | 7.9        |  |
| IMLTFC86H-C6L   | 316L     | 86                       | 12.7                     | 890                           | 310         | 7.9        |  |
| IMLTFC102H-L6L  | 316L     | 102                      | 12.7                     | 890                           | 362         | 7.9        |  |
| IMLTFC137H-C6L  | 316L     | 137                      | 12.7                     | 890                           | 462         | 7.9        |  |
| IMLTFC152H-L6L  | 316L     | 152                      | 12.7                     | 890                           | 521         | 7.9        |  |
| IMLTFC203H-L6L  | 316L     | 203                      | 12.7                     | 890                           | 679         | 7.9        |  |

# StrongHold™ Stainless Steel Cable Tie Part Numbers



| Thickness (mm)  | Recommended Tool                   | Std Pkg Qty | Std Ctn Qty |
|---|------------------------------------|-------------|-------------|
| <b>StrongHold™ Self-Locking Fully Coated Cable Ties</b> |                                    |             |             |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT        | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 100         | 500         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |
| 0.25  | GS4MT-E, HTMT, PPTMT, ST2MT, PBTMT | 50          | 250         |

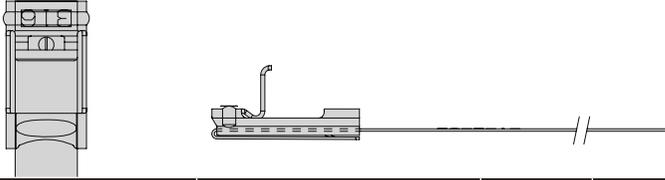


| Part Number   | Material                  | Length | Strap Breaking Strength |
|---|---------------------------|--------|-------------------------|
|   |                           | M      | N                       |
| <b>StrongHold™ Metal Strapping (Uncoated) - Coil</b>                    |                           |        |                         |
| IMS9.5T35-QR6L  | Stainless Steel Type 316L | 25     | 1780                    |
| IMS12T35-QR6L   | Stainless Steel Type 316L | 25     | 2445                    |
| IMS16T35-QR6L   | Stainless Steel Type 316L | 25     | 3110                    |
| IMS19T75-QR6L   | Stainless Steel Type 316L | 25     | 4225                    |
| <b>StrongHold™ Metal Strapping (Coated with Epoxy Polyester) - Coil</b> |                           |        |                         |
| IMSP9.5T35-QR6L   | Stainless Steel Type 316L | 25     | 1780                    |
| IMSP12T35-QR6L  | Stainless Steel Type 316L | 25     | 2445                    |
| IMSP16T35-QR6L  | Stainless Steel Type 316L | 25     | 3110                    |

^Base material less coating

| Part Number                | Material                  | Width |
|----------------------------|---------------------------|-------|
|                            |                           | mm    |
| <b>StrongHold™ Buckles</b> |                           |       |
| IMSBL9.5-C6L               | Stainless Steel Type 316L | 9.5   |
| IMSBL12-C6L                | Stainless Steel Type 316L | 12    |
| IMSBL16-C6L                | Stainless Steel Type 316L | 16    |
| IMSBE19-C6L                | Stainless Steel Type 316L | 19    |

## StrongHold™ Stainless Steel Straps and Buckles Part Numbers

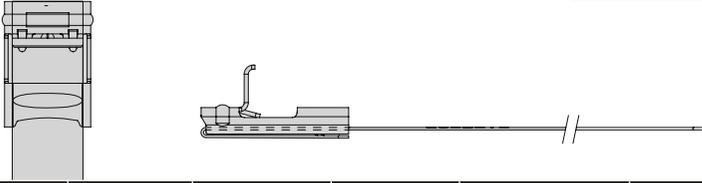

|   | Min<br>Bundle<br>Diameter<br>mm | Width<br>mm | Thickness<br>mm | Recommended<br>Installation Tool | Std.<br>Pkg.<br>Qty. |
|---|---------------------------------|-------------|-----------------|----------------------------------|----------------------|
| <b>StrongHold™ Metal Strapping (Uncoated) - Coil</b>                    |                                 |             |                 |                                  |                      |
|   | 26                              | 9.5         | 0.35            | BT75SDT                          | 1                    |
|   | 26                              | 12          | 0.35            | BT75SDT                          | 1                    |
|   | 26                              | 16          | 0.35            | BT75SDT                          | 1                    |
|   | 26                              | 19          | 0.75            | BT75SDT                          | 1                    |
| <b>StrongHold™ Metal Strapping (Coated with Epoxy Polyester) - Coil</b> |                                 |             |                 |                                  |                      |
|   | 26                              | 9.5         | 0.35^           | BT75SDT                          | 1                    |
|   | 26                              | 12          | 0.35^           | BT75SDT                          | 1                    |
|   | 26                              | 16          | 0.35^           | BT75SDT                          | 1                    |


| Part Description  | Std.<br>Pkg.<br>Qty. |
|---|----------------------|
| <b>StrongHold™ Buckles</b>                              |                      |
| Individual Buckle Style L for use with 9.5 mm strapping | 100                  |
| Individual Buckle Style L for use with 12 mm strapping  | 100                  |
| Individual Buckle Style L for use with 16 mm strapping  | 100                  |
| Individual Buckle Style E for use with 19 mm strapping  | 100                  |

# STRONGHOLD™ Terminals

As a trusted brand, Panduit provides solutions that will stay strong for a wide range of general purpose applications and outlast the competition. For contractors seeking an economical solution to satisfy general purpose applications, look no further than the StrongHold™ (Contractor Grade) Terminals Line.

## Navigating the StrongHold Packaging Icons


-  American Wire Gauge
-  Circular Mil
-  Insulation Diagram
-  Max Temperature
-  PIN Diagram
-  Strip Length
-  Voltage
-  Stud Size
-  Tab Size
-  Tool
-  Bullet

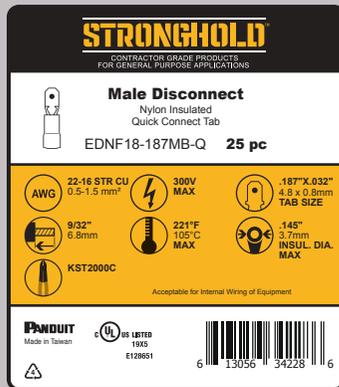

Please note the following information regarding bag quantities:  
 \* -Q= Package quantity of 25  
 -L= Package quantity of 50 where applicable  
 See [Panduit.com](http://Panduit.com) for individual part compliance and tooling options. All parts are ROHS compliant.

## Terminals Legend


Available in insulated and non-insulated options. See insulation options throughout this booklet for detailed information per product.

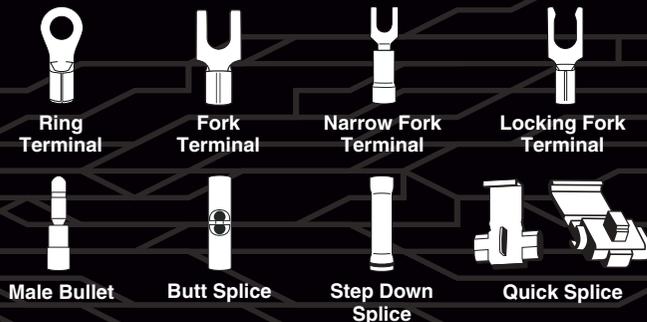

# StrongHold™ Terminal Part Numbers

## Ring Terminal

| Part Number   | Wire Range (AWG) | Color  | Stud/Tab Size | Std. Pkg. Qty. |    |
|---|------------------|--------|---------------|----------------|----|
| <b>Ring Terminal, Insulated – Vinyl</b>   |                  |        |               |                |    |
|  | EV6-10R-Q        | #6     | Blue          | #10            | 25 |
|   | EV6-12R-Q        | #6     | Blue          | 1/2"           | 25 |
|   | EV6-38R-Q        | #6     | Blue          | 3/8"           | 25 |
|   | EV6-56R-Q        | #6     | Blue          | 5/16"          | 25 |
|   | EV8-8R-Q         | #8     | Red           | #8             | 25 |
|   | EV8-12R-Q        | #8     | Red           | 1/2"           | 25 |
|   | EV8-14R-Q        | #8     | Red           | 1/4"           | 25 |
|   | EV8-38R-Q        | #8     | Red           | 3/8"           | 25 |
|   | EV8-56R-Q        | #8     | Yellow        | 5/16"          | 25 |
|   | EV10-10RB-Q      | #12-10 | Yellow        | #10            | 25 |
|   | EV10-12RB-Q      | #12-10 | Yellow        | 1/2"           | 25 |
|   | EV10-14RB-Q      | #12-10 | Yellow        | 1/4"           | 25 |
|   | EV10-38RB-Q      | #12-10 | Yellow        | 3/8"           | 25 |
|   | EV10-56RB-Q      | #12-10 | Yellow        | 5/16"          | 25 |
|   | EV10-6RB-Q       | #12-10 | Yellow        | #6             | 25 |
|   | EV10-8RB-Q       | #12-10 | Yellow        | #8             | 25 |
|   | EV14-10RB-Q*     | #16-14 | Blue          | #10            | 25 |
|   | EV14-14RB-Q*     | #16-14 | Blue          | 1/4"           | 25 |
|   | EV14-38RB-Q      | #16-14 | Blue          | 3/8"           | 25 |
|   | EV14-56RB-Q*     | #16-14 | Blue          | 5/16"          | 25 |
|   | EV14-6RB-Q*      | #16-14 | Blue          | #6             | 25 |
|   | EV14-8RB-Q*      | #16-14 | Blue          | #8             | 25 |
|   | EV18-8RB-Q*      | #22-18 | Red           | #8             | 25 |
|   | EV18-10RB-Q*     | #22-18 | Red           | #10            | 25 |
|   | EV18-14RB-Q*     | #22-18 | Red           | 1/4"           | 25 |
|   | EV18-56RB-Q*     | #22-18 | Red           | 5/16"          | 25 |
|   | EV18-6RB-Q*      | #22-18 | Red           | #6             | 25 |

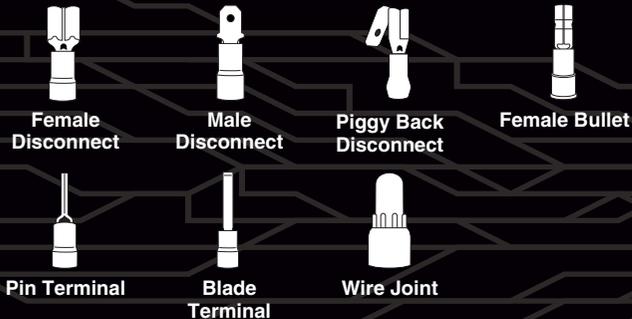

## Ring Terminal

| Part Number   |  Wire Range (AWG) | Color  |  Stud/Tab Size | Std. Pkg. Qty. |    |
|---|--|--------|---|----------------|----|
| <b>Ring Terminal, Non-Insulated</b>   |  |        |   |                |    |
|  | E10-10RB-Q   | #12-10 | Yellow  | #10            | 25 |
|   | E10-14RB-Q   | #12-10 | Yellow  | 1/4"           | 25 |
|   | E10-6RB-Q  | #12-10 | Yellow  | #6             | 25 |
|   | E10-8RB-Q  | #12-10 | Yellow  | #8             | 25 |
|   | E14-10RB-Q*  | #16-14 | Blue  | #10            | 25 |
|   | E14-4RB-Q*   | #16-14 | Blue  | #4             | 25 |
|   | E14-6RB-Q*   | #16-14 | Blue  | #6             | 25 |
|   | E14-8RB-Q*   | #16-14 | Blue  | #8             | 25 |
|   | E18-10RB-Q*  | #22-18 | Red   | #10            | 25 |
|   | E18-4RB-Q*   | #22-18 | Red   | #4             | 25 |
|   | E18-6RB-Q*   | #22-18 | Red   | #6             | 25 |
|   | E18-8RB-Q*   | #22-18 | Red   | #8             | 25 |

## Fork Terminal

| Part Number   |  Wire Range (AWG) | Color  |  Stud/Tab Size | Std. Pkg. Qty. |    |
|---|--|--------|---|----------------|----|
| <b>Fork Terminal, Insulated – Vinyl</b>   |  |        |   |                |    |
|    | EV10-10FB-Q  | #12-10 | Yellow  | #10            | 25 |
|   | EV10-14FB-Q  | #12-10 | Yellow  | 1/4"           | 25 |
|   | EV10-56FB-Q  | #12-10 | Yellow  | 5/16"          | 25 |
|   | EV10-6FB-Q   | #12-10 | Yellow  | #6             | 25 |
|   | EV10-8FB-Q   | #12-10 | Yellow  | #8             | 25 |
|   | EV14-10FB-Q*   | #16-14 | Blue  | #10            | 25 |
|   | EV14-14FB-Q  | #16-14 | Blue  | 1/4"           | 25 |
|   | EV14-6FB-Q*  | #16-14 | Blue  | #6             | 25 |
|   | EV14-8FB-Q*  | #16-14 | Blue  | #8             | 25 |
|   | EV18-10FB-Q*   | #22-18 | Red   | #10            | 25 |
|   | EV18-6FB-Q*  | #22-18 | Red   | #6             | 25 |
|   | EV18-8FB-Q*  | #22-18 | Red   | #8             | 25 |
| EV18-14FB-Q   | #22-16   | Red    | 1/4"  | 25             |    |
| <b>Fork Terminal, Non-Insulated</b>   |  |        |   |                |    |
|  | E10-10FB-Q   | #12-10 | Yellow  | #10            | 25 |
|   | E10-14FB-Q   | #12-10 | Yellow  | 1/4"           | 25 |
|   | E10-6FB-Q  | #12-10 | Yellow  | #6             | 25 |
|   | E10-8FB-Q  | #12-10 | Yellow  | #8             | 25 |
|   | E14-10FB-Q*  | #16-14 | Blue  | #10            | 25 |
|   | E14-6FB-Q*   | #16-14 | Blue  | #6             | 25 |
|   | E14-8FB-Q*   | #16-14 | Blue  | #8             | 25 |
|   | E18-10FB-Q*  | #22-18 | Red   | #10            | 25 |
|   | E18-6FB-Q*   | #22-18 | Red   | #6             | 25 |
|   | E18-8FB-Q*   | #22-18 | Red   | #8             | 25 |

# StrongHold™ Terminals Part Numbers

## Narrow Fork Terminal

| Part Number   | AWG Wire Range (AWG) | Color  | Stud/Tab Size | Std. Pkg. Qty. |
|---|----------------------|--------|---------------|----------------|
| <b>Narrow Fork Terminal, Insulated – Vinyl</b>  |                      |        |               |                |
|  EV10-10FNB-Q | #12-10               | Yellow | #10           | 25             |
| EV10-8FNB-Q   | #12-10               | Yellow | #8            | 25             |
| EV14-10FNB-Q  | #16-14               | Blue   | #10           | 25             |
| EV14-6FNB-Q   | #16-14               | Blue   | #6            | 25             |
| EV14-8FNB-Q   | #16-14               | Blue   | #8            | 25             |

## Locking Fork Terminal

| Part Number   | AWG Wire Range (AWG) | Color  | Stud/Tab Size | Std. Pkg. Qty. |
|---|----------------------|--------|---------------|----------------|
| <b>Locking Fork Terminal, Insulated – Vinyl</b>   |                      |        |               |                |
|  EV10-10LFB-Q | #12-10               | Yellow | #10           | 25             |
| EV10-14LFB-Q  | #12-10               | Yellow | 1/4"          | 25             |
| EV10-6LFB-Q   | #12-10               | Yellow | #6            | 25             |
| EV10-8LFB-Q   | #12-10               | Yellow | #8            | 25             |
| EV14-10LFB-Q*   | #16-14               | Blue   | #10           | 25             |
| EV14-6LFB-Q*  | #16-14               | Blue   | #6            | 25             |
| EV14-8LFB-Q*  | #16-14               | Blue   | #8            | 25             |
| EV18-10LFB-Q*   | #22-18               | Red    | #10           | 25             |
| EV18-6LFB-Q*  | #22-18               | Red    | #6            | 25             |
| EV18-8LFB-Q*  | #22-18               | Red    | #8            | 25             |
| <b>Locking Fork Terminal, Non-Insulated</b>   |                      |        |               |                |
|  E10-10LFB-Q | #12-10               | Yellow | #10           | 25             |
| E10-14LFB-Q   | #12-10               | Yellow | 1/4"          | 25             |
| E10-6LFB-Q  | #12-10               | Yellow | #6            | 25             |
| E10-8LFB-Q  | #12-10               | Yellow | #8            | 25             |
| E14-10LFB-Q*  | #16-14               | Blue   | #10           | 25             |
| E14-6LFB-Q*   | #16-14               | Blue   | #6            | 25             |
| E14-8LFB-Q*   | #16-14               | Blue   | #8            | 25             |
| E18-10LFB-Q*  | #22-18               | Red    | #10           | 25             |
| E18-6LFB-Q*   | #22-18               | Red    | #6            | 25             |
| E18-8LFB-Q*   | #22-18               | Red    | #8            | 25             |

## Female Disconnect Terminal

| Part Number   | AWG Wire Range (AWG) | Color  | Stud/Tab Size   | Std. Pkg. Qty. |
|---|----------------------|--------|-----------------|----------------|
| <b>Female Disconnect Terminal, Insulated – Nylon</b>  |                      |        |                 |                |
|  EDNF10-250FI-Q | #12-10               | Yellow | 0.250" x 0.032" | 25             |
| EDNF14-188FIB-Q*  | #16-14               | Blue   | 0.187" x 0.020" | 25             |
| EDNF14-250FIB-Q*  | #16-14               | Blue   | 0.250" x 0.032" | 25             |
| EDNF18-188FIB-Q*  | #22-18               | Red    | 0.187" x 0.020" | 25             |
| EDNF18-250FIB-Q*  | #22-18               | Red    | 0.250" x 0.032" | 25             |

## Female Disconnect Terminal

| Part Number   | AWG Wire Range (AWG) | Color  | Stud/Tab Size | Std. Pkg. Qty.  |    |
|---|----------------------|--------|---------------|-----------------|----|
| <b>Female Disconnect Terminal, Insulated – Vinyl</b>                              |                      |        |               |                 |    |
|  | EDV10-250-Q          | #12-10 | Yellow        | 0.250" x 0.032" | 25 |
|   | EDV14-188B-Q*        | #16-14 | Blue          | 0.187" x 0.020" | 25 |
|   | EDV14-250B-Q*        | #16-14 | Blue          | 0.250" x 0.032" | 25 |
|   | EDV18-188B-Q*        | #22-18 | Red           | 0.187" x 0.020" | 25 |
|   | EDV18-250B-Q*        | #22-18 | Red           | 0.250" x 0.032" | 25 |
|   | EDV10-250FIB-Q       | #12-10 | Yellow        | 0.250" x 0.032" | 25 |
|   | EDV14-250FIB-Q       | #16-14 | Blue          | 0.250" x 0.032" | 25 |
|   | EDV18-250FIB-Q       | #22-16 | Red           | 0.250" x 0.032" | 25 |
| <b>Female Disconnect Terminal, Non-Insulated</b>                                  |                      |        |               |                 |    |
|  | ED14-188-Q*          | #16-14 | Blue          | 0.187" x 0.020" | 25 |
|   | ED14-250-Q*          | #16-14 | Blue          | 0.250" x 0.032" | 25 |
|   | ED18-188-Q*          | #22-18 | Red           | 0.187" x 0.020" | 25 |
|   | ED18-250-Q*          | #22-18 | Red           | 0.250" x 0.032" | 25 |

## Male Disconnect Terminal

| Part Number   | AWG Wire Range (AWG) | Color  | Stud/Tab Size | Std. Pkg. Qty.  |    |
|---|----------------------|--------|---------------|-----------------|----|
| <b>Male Disconnect Terminal, Insulated – Nylon</b>                                  |                      |        |               |                 |    |
|    | EDNF14-187MB-Q       | #16-14 | Blue          | 0.187" x 0.032" | 25 |
|   | EDNF18-187MB-Q       | #22-16 | Red           | 0.187" x 0.032" | 25 |
|   | EDNF10250FIMB-Q      | #12-10 | Yellow        | 0.250" x 0.032" | 25 |
|   | EDNF14250FIMB-Q*     | #16-14 | Blue          | 0.250" x 0.032" | 25 |
|   | EDNF18250FIMB-Q*     | #22-18 | Red           | 0.250" x 0.032" | 25 |
| <b>Male Disconnect Terminal, Insulated – Vinyl</b>                                  |                      |        |               |                 |    |
|  | EDV10-250M-Q         | #12-10 | Yellow        | 0.250" x 0.032" | 25 |
|   | EDV14-187MB-Q        | #16-14 | Blue          | 0.187" x 0.032" | 25 |
|   | EDV14-250M-Q*        | #16-14 | Blue          | 0.250" x 0.032" | 25 |
|   | EDV18-187MB-Q        | #22-16 | Red           | 0.187" x 0.032" | 25 |
|   | EDV18-250M-Q*        | #22-18 | Red           | 0.250" x 0.032" | 25 |
| <b>Male Disconnect Terminal, Non-Insulated</b>                                      |                      |        |               |                 |    |
|  | ED10-250M-Q          | #12-10 | Yellow        | 0.250" x 0.032" | 25 |
|   | ED14-250MB-Q*        | #16-14 | Blue          | 0.250" x 0.032" | 25 |
|   | ED18-250MB-Q*        | #22-18 | Red           | 0.250" x 0.032" | 25 |

# StrongHold™ Terminals Part Numbers

## Piggy Back Disconnect Terminal

| Part Number  | AWG Wire Range (AWG) | Color  | Stud/Tab Size   | Std. Pkg. Qty. |
|--|----------------------|--------|-----------------|----------------|
|  Piggy Back Disconnect Terminal, Insulated – Vinyl |                      |        |                 |                |
| EDV10-250P-Q   | #12-10               | Yellow | 0.250" x 0.032" | 25             |
| EDV14-250P-Q*  | #16-14               | Blue   | 0.250" x 0.032" | 25             |
| EDV18-250P-Q*  | #22-18               | Red    | 0.250" x 0.032" | 25             |

## Female Bullet Terminal

| Part Number  | AWG Wire Range (AWG) | Color | Bullet        | Std. Pkg. Qty. |
|--|----------------------|-------|---------------|----------------|
|  Female Bullet Terminal, Insulated – Nylon |                      |       |               |                |
| EBNF14-4FIB-Q  | #16-14               | Blue  | .156" / 3.9mm | 25             |
| EBNF18-4FIB-Q  | #22-16               | Red   | .156" / 3.9mm | 25             |
|  Female Bullet Terminal, Insulated – Vinyl |                      |       |               |                |
| EBV18-4B-Q   | #22-16               | Red   | .156" / 3.9mm | 25             |
| EBV14-4B-Q   | #16-14               | Blue  | .156" / 3.9mm | 25             |

## Male Bullet Terminal

| Part Number  | AWG Wire Range (AWG) | Color | Bullet        | Std. Pkg. Qty. |
|--|----------------------|-------|---------------|----------------|
|  Male Bullet Terminal, Insulated – Nylon   |                      |       |               |                |
| EBNF14-4FIM-Q  | #16-14               | Blue  | .156" / 3.9mm | 25             |
| EBNF18-4FIM-Q  | #22-16               | Red   | .156" / 3.9mm | 25             |
|  Male Bullet Terminal, Insulated – Vinyl |                      |       |               |                |
| EBV14-4MB-Q  | #16-14               | Blue  | .156" / 3.9mm | 25             |
| EBV18-4MB-Q  | #22-16               | Red   | .156" / 3.9mm | 25             |

## Butt Splice

| Part Number   | AWG Wire Range (AWG) | Color  | Std. Pkg. Qty. |
|---|----------------------|--------|----------------|
|  Butt Splice, Insulated – Vinyl |                      |        |                |
| ESV10BX-Q   | #12-10               | Yellow | 25             |
| ESV14BX-Q*  | #16-14               | Blue   | 25             |
| ESV18BX-Q*  | #22-18               | Red    | 25             |
|  Butt Splice, Non-Insulated     |                      |        |                |
| ES10B-Q   | #12-10               | Yellow | 25             |
| ES14B-Q*  | #16-14               | Blue   | 25             |
| ES18B-Q*  | #22-18               | Red    | 25             |

**Step Down Splice**

| Part Number   |  Wire Range (AWG) | Color  | Std. Pkg. Qty. |    |
|---|--|--|----------------|----|
| <b>Step Down Splice, Insulated – Vinyl</b>  |  |  |                |    |
|  | ESV10-ESV14-Q  | #12-10 to 16-14, Yellow with Blue Color Ring | Yellow         | 25 |
|   | ESV10-ESV18-Q  | #12-10 to 22-18, Yellow with Red Color Ring  | Yellow         | 25 |
|   | ESV14-ESV18-Q  | #16-14 to 22-18, Blue with Red Color Ring    | Blue           | 25 |
|   | ESV6-ESV8-Q  | #6 to 8, Blue with Red Color Ring            | Blue           | 25 |
|   | ESV8-ESV10-Q   | #8 to 12-10, Red with Yellow Color Ring      | Red            | 25 |
|   | ESV8-ESV14-Q   | #8 to 16-14, Red with Blue Color Ring        | Red            | 25 |

**Quick Splice**

| Part Number   |  Wire Range (AWG) | Color           | Std. Pkg. Qty. |    |
|---|--|-----------------|----------------|----|
| <b>Quick Splice, Insulated – Polypropylene</b>                                    |  |                 |                |    |
|  | EQSP18D-Q  | #22-16          | Red            | 25 |
|   | EQSP14D-Q*   | #18-14          | Blue           | 25 |
|   | EQSP10-18D-Q   | #12-10 to 18-14 | Brown          | 25 |
|   | EQSP10-Q   | #12-10          | Yellow         | 25 |
|   | EQSP14-Q   | #18-14          | Blue           | 25 |
|   | EQSP18-Q   | #22-18          | Red            | 25 |

**Pin Terminal**

| Part Number   |  Wire Range (AWG) | Color  |  Pin Diameter | Std. Pkg. Qty. |    |
|---|--|--------|--|----------------|----|
| <b>Pin Terminal, Insulated – Vinyl</b>  |  |        |  |                |    |
|  | EV10-P55-Q   | #12-10 | Yellow   | 0.10" Dia.     | 25 |
|   | EV14-P47B-Q*   | #16-14 | Blue   | 0.07" Dia.     | 25 |
|   | EV18-P47B-Q*   | #22-18 | Red  | 0.07" Dia.     | 25 |

# StrongHold™ Terminals Part Numbers

## Blade Terminal

| Part Number                              | AWG Wire Range (AWG) | Color  | Std. Pkg. Qty. |
|--|----------------------|--------|----------------|
| <b>Blade Terminal, Insulated – Vinyl</b> |                      |        |                |
| EDV10-11MB-Q                             | #12-10               | Yellow | 25             |
| EDV14-87MB-Q                             | #16-14               | Blue   | 25             |
| EDV18-87MB-Q                             | #22-18               | Red    | 25             |

## Wire Joint

| Part Number                          | AWG Wire Range (AWG) | Color | Std. Pkg. Qty. |
|--------------------------------------|----------------------|-------|----------------|
| <b>Wire Joint, Insulated – Nylon</b> |                      |       |                |
| EJN218-216-Q*                        | #22-14               | Clear | 25             |
| EJN418-212-Q                         | #18 -12              | Clear | 25             |
| EJN314-412-Q                         | #16-8                | Clear | 25             |

Please note the following information regarding bag quantities:

\*-Q= Package quantity of 25

-L= Package quantity of 50 where applicable

See [Panduit.com](http://Panduit.com) for individual part compliance and tooling options.

All parts are ROHS compliant.

## Snap-Close Conduit Clips



Image 1



Image 2


- No fastener required to retain conduit
- Static load capacity:
  - 100 lbs. in vertical position
  - 25 lbs. in horizontal position



| Part Number | Image No. | Fits EMT/Rigid/IMC (In.) | Mounting Hole (In.) | Std. Pkg. Qty. |
|-------------|-----------|--------------------------|---------------------|----------------|
| P6M         | 1         | 3/8*                     | 1/4<br>non-threaded | 100            |
| P16M        | 1         | 1                        |                     | 100            |
| P20M        | 1         | 1 1/4                    |                     | 100            |
| P24M        | 1         | 1 1/2                    |                     | 100            |
| P812M       | 1         | 1/2 – 3/4                |                     | 100            |
| P812M4I**   | 2         | 1/2 – 3/4                | 1/4-20 threaded     | 100            |
| P32M        | 1         | 2                        | 1/4<br>non-threaded | 100            |

\*Or 14-2 through 12-3 MC/AC cable.

\*\*Not UL or cUL listed.



## Push-Fit Conduit Clips



- No fastener required to retain conduit
- Static load capacity:
  - 25 lbs. in vertical position
  - 15 lbs. in horizontal position
- Available with 1/4" non-threaded mounting hole

| Part Number | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|----------------|----------------------|----------------|
| P8P         | 1/2            | —                    | 100            |
| P12P        | 3/4            | 1/2                  | 100            |
| P16P        | 1              | 3/4                  | 100            |




**Conduit Clamps with Bolt**


- Conduit hanger available for 1/2" – 4" conduit
- Bolt and nut (Phillips/flathead) provide positive securing feature
- Available with threaded and non-threaded mounting hole



| Part Number | Fits EMT (In.) | Fits Rigid/IMC (In.) | Mounting Hole (In.) | Std. Pkg. Qty. |
|-------------|----------------|----------------------|---------------------|----------------|
| PCD0B       | 1/2            | 3/8 – 1/2            | 1/4 non-threaded    | 100            |
| PCD1B       | 3/4            | 3/4                  | 1/4 non-threaded    | 100            |
| PCD2B       | 1              | 1                    | 1/4 non-threaded    | 100            |
| PCD2.5B     | 1 1/4          | —                    | 1/4 non-threaded    | 100            |
| PCD3B       | 1 1/2          | 1 1/4                | 1/4 non-threaded    | 100            |
| PCD4B       | —              | 1 1/2                | 5/16 non-threaded   | 100            |
| PCD5B       | 2              | 2                    | 5/16 non-threaded   | 50             |
| PCD6B       | 2 1/2          | 2 1/2                | 5/16 non-threaded   | 50             |
| PCD7B       | 3              | 3                    | 5/16 non-threaded   | 25             |
| PCD8B       | 3 1/2          | 3 1/2                | 5/16 non-threaded   | 25             |
| PCD9B       | 4              | 4                    | 1/2 non-threaded    | 10             |



# StrongHold™ Cable/Conduit Part Numbers


## Snap-Close Conduit Clips with Beam Clamps – Bottom Mount



- Suspend conduit from bottom of beam
- Will pivot 360°
- Hammer-on installation
- Static load capacity: 75 lbs. vertically



| Part Number | Flange Thickness (In.) | Fits EMT/Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|------------------------|--------------------------|----------------|
| P6M24       | 1/8 – 1/4              | 3/8                      | 100            |
| P6M58       | 5/16 – 1/2             | 3/8                      | 100            |
| P6M912      | 9/16 – 3/4             | 3/8                      | 100            |
| P812M24     | 1/8 – 1/4              | 1/2 – 3/4                | 100            |
| P812M58     | 5/16 – 1/2             | 1/2 – 3/4                | 100            |
| P812M912    | 9/16 – 3/4             | 1/2 – 3/4                | 100            |
| P16M24      | 1/8 – 1/4              | 1                        | 100            |
| P16M58      | 5/16 – 1/2             | 1                        | 100            |
| P16M912     | 9/16 – 3/4             | 1                        | 100            |
| P20M24      | 1/8 – 1/4              | 1 1/4                    | 100            |
| P20M58      | 5/16 – 1/2             | 1 1/4                    | 100            |
| P20M912     | 9/16 – 3/4             | 1 1/4                    | 100            |
| P24M24      | 1/8 – 1/4              | 1 1/2                    | 100            |
| P24M58      | 5/16 – 1/2             | 1 1/2                    | 100            |
| P24M912     | 9/16 – 3/4             | 1 1/2                    | 100            |
| P32M24      | 1/8 – 1/4              | 2                        | 100            |
| P32M58      | 5/16 – 1/2             | 2                        | 100            |
| P32M912     | 9/16 – 3/4             | 2                        | 100            |




### Snap-Close Conduit Clips with Beam Clamps – Side Mount



- Suspend conduit from side of beam
- Will pivot 360°
- Hammer-on installation
- Static load capacity: 25 lbs. vertically



| Part Number | Flange Thickness (In.) | Fits EMT/Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|------------------------|--------------------------|----------------|
| P6M24SM     | 1/8 – 1/4              | 3/8                      | 100            |
| P6M58SM     | 5/16 – 1/2             | 3/8                      | 100            |
| P6M912SM    | 9/16 – 3/4             | 3/8                      | 100            |
| P812M24SM   | 1/8 – 1/4              | 1/2 – 3/4                | 100            |
| P812M58SM   | 5/16 – 1/2             | 1/2 – 3/4                | 100            |
| P812M912SM  | 9/16 – 3/4             | 1/2 – 3/4                | 100            |
| P16M24SM    | 1/8 – 1/4              | 1                        | 100            |
| P16M58SM    | 5/16 – 1/2             | 1                        | 100            |
| P16M912SM   | 9/16 – 3/4             | 1                        | 100            |
| P20M24SM    | 1/8 – 1/4              | 1 1/4                    | 100            |
| P20M58SM    | 5/16 – 1/2             | 1 1/4                    | 100            |
| P20M912SM   | 9/16 – 3/4             | 1 1/4                    | 100            |
| P24M24SM    | 1/8 – 1/4              | 1 1/2                    | 100            |
| P24M58SM    | 5/16 – 1/2             | 1 1/2                    | 100            |
| P24M912SM   | 9/16 – 3/4             | 1 1/2                    | 100            |
| P32M24SM    | 1/8 – 1/4              | 2                        | 100            |
| P32M58SM    | 5/16 – 1/2             | 2                        | 100            |
| P32M912SM   | 9/16 – 3/4             | 2                        | 100            |



# StrongHold™ Cable/Conduit Part Numbers

## Push-Fit Conduit Clips with Beam Clamps





Image 1



Image 2

- Available in bottom mount or side mount options
- Will pivot 360°
- Hammer-on installation
- Static load capacity:
  - 25 lbs. vertically for bottom mount (Image 1)
  - 15 lbs. vertically for side mount (Image 2)

| Part Number | Image No. | Flange Thickness (In.) | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|------------------------|----------------|----------------------|----------------|
| P8P24       | 1         | 1/8 – 1/4              | 1/2            | —                    | 100            |
| P8P58       | 1         | 5/16 – 1/2             | 1/2            | —                    | 100            |
| P8P912      | 1         | 9/16 – 3/4             | 1/2            | —                    | 100            |
| P12P24      | 1         | 1/8 – 1/4              | 3/4            | 1/2                  | 100            |
| P12P58      | 1         | 5/16 – 1/2             | 3/4            | 1/2                  | 100            |
| P12P912     | 1         | 9/16 – 3/4             | 3/4            | 1/2                  | 100            |
| P16P24      | 1         | 1/8 – 1/4              | 1              | 3/4                  | 100            |
| P16P58      | 1         | 5/16 – 1/2             | 1              | 3/4                  | 100            |
| P16P912     | 1         | 9/16 – 3/4             | 1              | 3/4                  | 100            |
| P8P24SM     | 2         | 1/8 – 1/4              | 1/2            | —                    | 100            |
| P8P58SM     | 2         | 5/16 – 1/2             | 1/2            | —                    | 100            |
| P8P912SM    | 2         | 9/16 – 3/4             | 1/2            | —                    | 100            |
| P12P24SM    | 2         | 1/8 – 1/4              | 3/4            | 1/2                  | 100            |
| P12P58SM    | 2         | 5/16 – 1/2             | 3/4            | 1/2                  | 100            |
| P12P912SM   | 2         | 9/16 – 3/4             | 3/4            | 1/2                  | 100            |
| P16P24SM    | 2         | 1/8 – 1/4              | 1              | 3/4                  | 100            |
| P16P58SM    | 2         | 5/16 – 1/2             | 1              | 3/4                  | 100            |
| P16P912SM   | 2         | 9/16 – 3/4             | 1              | 3/4                  | 100            |



### Cable Clips




- Support MC, AC, or BX cable from #12 – #8 wire in horizontal or vertical position
- No static load rating – for positioning only
- Can also be used for flexible metallic tubing, armored cable, portable cables, and control tubes
- See chart below for installation configurations

| Part Number | Description   | Std. Pkg. Qty. |
|-------------|---|----------------|
| PKX         | Cable clip to support MC, AC, or BX cable from drop wire. | 100            |

| Cable Size (In.)        | #12 Wire | #10 Wire | #8 – #9 Wire |
|-------------------------|----------|----------|--------------|
| 14-2 (0.43 – 0.48 O.D.) | PKX      | PKX      | PKX          |
| 14-3 (0.45 – 0.50 O.D.) | PKX      | PKX      | PKX          |
| 12-2 (0.47 – 0.51 O.D.) | PKX      | PKX      | PKX          |
| 12-3 (0.49 – 0.54 O.D.) | PKX      | PK8*     | PK8*         |

\*See PK8 on Page A.7.



# StrongHold™ Cable/Conduit Part Numbers

## Conduit Clips



- Support conduit from drop wire, rod, or flange
- No static load rating – for positioning only
- Can also be used for flexible metallic tubing, armored cable, portable cables, and control tubes
- See chart below for installation configurations




| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PK8         | Conduit clip to support 1/2" EMT from drop wire, rod, or flange. | 100            |
| PK12        | Conduit clip to support 3/4" EMT from drop wire, rod, or flange. | 100            |
| PK16*       | Conduit clip to support 1" EMT from drop wire, rod, or flange.   | 100            |
| PK20*       | Conduit clip to support 1 1/4" EMT drop wire, rod, or flange.    | 100            |

\*Not UL or cUL listed.

| Conduit Size (In.) | #10 – #12 Wire | #8 – #9 Wire | 3/16" – 1/4" Rod | 1/8" – 1/4" Flange | 5/16" – 1/2" Flange | 9/16" – 3/4" Flange |
|--------------------|----------------|--------------|------------------|--------------------|---------------------|---------------------|
| 1/2 EMT            | PK8            | PK8          | PK8              | PK8                | PK12                | PK12                |
| 1/2 Rigid          | PK8            | PK12         | PK12             | PK12               | PK12                | PK16                |
| 3/4 EMT            | PK12           | PK12         | PK12             | PK12               | PK16                | PK16                |
| 3/4 Rigid          | PK12           | PK12         | PK16             | PK16               | PK20*               | PK20*               |
| 1 EMT              | –              | PK16         | PK16             | PK16               | PK20*               | PK20*               |
| 1 Rigid            | –              | –            | –                | PK20*              | PK20*               | PK20*               |
| 1 1/4 EMT          | –              | PK20         | PK20             | PK20               | –                   | –                   |

\*For horizontal applications only.



### Multi-Function Clip Assemblies



Image 1



Image 2




Image 3

- Components and assemblies used to secure conduit and devices to drop wire, rod, or flanges
- P4Z34 and assemblies fit 1/8" – 3/8" flanges and attach to #12 wire through 3/8" rod
- P6Z34 fits 1/8" – 7/16" flanges and attaches to #12 wire through 3/8" rod with improved performance
- No static load rating – for positioning only

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| P4Z34*      | 1         | —              | —                    | 100            |
| P6Z34*      | 1         | —              | —                    | 100            |
| P4Z348P     | 2         | 1/2            | —                    | 100            |
| P4Z3412P    | 2         | 3/4            | 1/2                  | 100            |
| P4Z3416P    | 2         | 1              | 3/4                  | 100            |
| P4Z34812M   | 3         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |
| P4Z3416M    | 3         | 1              | 1                    | 100            |

\*UL and cUL listed.

Note: May require dedicated drop wire/rod and PEC311 – consult local authority.

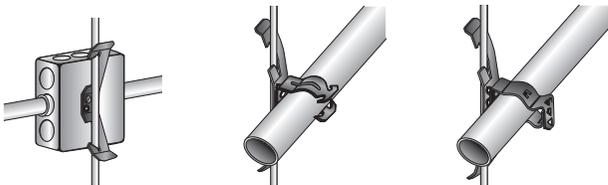

## Conduit-To-Conduit Trapeze Assemblies with Snap-Close Clips



- Designed to quickly secure one conduit run to another
- No fasteners required
- Static load capacity: Total trapeze must not exceed 100 lbs.

| Part Number | Fits EMT/Rigid/IMC (In.) | Std. Pkg Qty. |
|-------------|--------------------------|---------------|
| P166M       | 3/8" to 1                | 100           |
| P16812M     | 1/2 – 3/4 to 1           | 100           |
| P1616M      | 1 to 1                   | 100           |
| P1620M      | 1 1/4 to 1               | 100           |
| P1624M      | 1 1/2 to 1               | 100           |

\*Or 14-2 through 12-3 MC/AC cable.




## Conduit-To-Conduit Trapeze Assemblies with Push-Fit Clips



- Designed to quickly secure one conduit run to another
- No fasteners required
- Static load capacity: 25 lbs.
- Top conduit to be used for support only

| Part Number | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|----------------|----------------------|----------------|
| P8P8P       | 1/2 to 1/2     | —                    | 100            |
| P8P12P      | 1/2 to 3/4     | —                    | 100            |
| P8P16P      | 1/2 to 1       | —                    | 100            |
| P12P12P     | 3/4 to 3/4     | 1/2 to 1/2           | 100            |
| P12P16P     | 3/4 to 1       | 1/2 to 3/4           | 100            |
| P16P16P     | 1 to 1         | 3/4 to 3/4           | 100            |



### One-Piece Strut Clamps



- Used to mount conduit to strut
- All sizes available with load distribution saddle attached to screw to distribute weight
- Suitable for use with standard 1 5/8" strut
- Install with screwdriver, nut driver, or standard wrench



| Part Number | Fits EMT (In.) | Fits Rigid/IMC (In.) | Static Load Capacity (Lbs.) | Std. Pkg. Qty. |
|-------------|----------------|----------------------|-----------------------------|----------------|
| PSCH6B      | 3/8            | —                    | —                           | 100            |
| PSCH8B      | 1/2            | —                    | 50                          | 100            |
| PSCH12B     | 3/4            | 1/2                  | 50                          | 50             |
| PSCH16B     | 1              | 3/4                  | 59                          | 50             |
| PSCH20B     | 1 1/4          | 1                    | 75                          | 50             |
| PSCH24B     | 1 1/2          | 1 1/4                | 80                          | 50             |
| PSCH32B     | 2              | 1 1/2                | 100                         | 25             |
| PSCH40B     | —              | 2                    | 80                          | 25             |
| PSCH48B     | 2 1/2          | 2 1/2                | 125                         | 25             |
| PSCH56B     | 3              | 3                    | 160                         | 10             |
| PSCH64B     | 3 1/2          | 3 1/2                | 200                         | 10             |
| PSCH72B     | 4              | 4                    | 330                         | 10             |



## Universal Strut Clamps



- Break-apart strut clamp
- Install with screwdriver, nut driver, or standard wrench
- Suitable for use with standard 1 5/8" strut
- Material: mild steel

| Part Number | Fits EMT/Rigid/IMC (In.) | Static Load Rating (Lbs.) | Std. Pkg. Qty. |
|-------------|--------------------------|---------------------------|----------------|
| PSK85I      | 1/2                      | 200                       | 100            |
| PSK125I     | 3/4                      | 200                       | 100            |
| PSK165I     | 1                        | 200                       | 100            |
| PSK205I     | 1 1/4                    | 200                       | 100            |
| PSK245I     | 1 1/2                    | 200                       | 50             |
| PSK325I     | 2                        | 200                       | 50             |
| PSK405I     | 2 1/2                    | 350                       | 50             |
| PSK485I     | 3                        | 350                       | 50             |
| PSK565I     | 3 1/2                    | 350                       | 25             |
| PSK645I     | 4                        | 350                       | 25             |



**Combination Box/Conduit Hangers from Drop Wire, Rod, and Beams**

**Image 1**

- Secure 3/8" conduit (MC/AC cable) and 4" square boxes to most structures
- Provide 3/8" conduit (MC/AC cable) support on both sides of electrical box
- Available in a variety of mounting configurations


**Image 2**

**Image 3**

**Image 4**


| Part Number | Image No. | Mounting Method  | Fits EMT/Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|--|--------------------------|----------------|
| P6MB18      | 1         | #12 wire through 1/4" flange                             | 3/8*                     | 25             |
| P6MB18A     | 2         | Non-threaded center hole for screw or threaded rod mount | 3/8*                     | 25             |
| P812MB18    | 1         | #12 wire through 1/4" rod                                | 1/2 – 3/4                | 25             |
| P812MB18A   | 2         | Non-threaded center hole for screw or threaded rod mount | 1/2 – 3/4                | 25             |
| P812MB1824  | 3         | 1/8" through 1/4" flange                                 | 1/2 – 3/4                | 25             |

\*Or 14-2 through 12-3 MC/AC cable.

## StrongHold™ Cable/Conduit Part Numbers

### Combination Box/Conduit Hangers from Drop Wire, Rod, and Beams (continued)

| Part Number | Image No. | Mounting Method  | Fits EMT/Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|--|--------------------------|----------------|
| P812MB18S   | 4         | 1/4-20 x 9/16" stud in center hole                       | 1/2 – 3/4                | 25             |
| P16MB18     | 1         | #12 wire through 1/4" rod                                | 1                        | 25             |
| P16MB18A    | 2         | Non-threaded center hole for screw or threaded rod mount | 1                        | 25             |

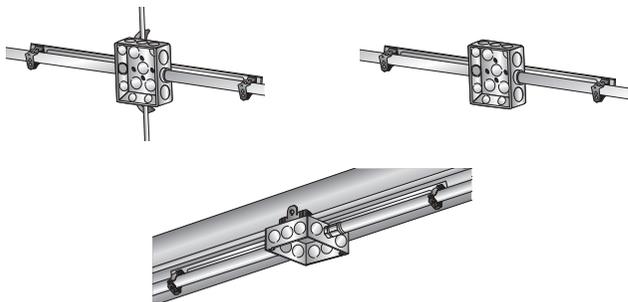

**Flexible Conduit/Cable Clips**

- Suitable for flexible conduit and all types of cable
- Support cable from 1/16" – 1/2" flange
- No static load rating – for positioning only
- Clip "snaps" on flange and cable "snaps" into clip

| Part Number | AC/MC Cable O.D. (In.) | Flange Size (In.) | Std. Pkg. Qty. |
|-------------|------------------------|-------------------|----------------|
| PSC2A       | 0.22 – 0.28            | 1/16 – 3/16       | 100            |
| PSC2B       | 0.31 – 0.38            | 1/16 – 3/16       | 100            |
| PSC2C       | 0.38 – 0.44            | 1/16 – 3/16       | 100            |
| PSC2D       | 0.47 – 0.56            | 1/16 – 3/16       | 100            |
| PSC2E       | 0.50 – 0.72            | 1/16 – 3/16       | 100            |
| PSC2F       | 0.75 – 0.94            | 1/16 – 3/16       | 100            |
| PSC2G       | 0.97 – 1.25            | 1/16 – 3/16       | 100            |
| PSC4A       | 0.22 – 0.28            | 3/16 – 9/32       | 100            |
| PSC4B       | 0.31 – 0.38            | 3/16 – 9/32       | 100            |
| PSC4C       | 0.38 – 0.44            | 3/16 – 9/32       | 100            |
| PSC4D       | 0.47 – 0.56            | 3/16 – 9/32       | 100            |
| PSC4E       | 0.50 – 0.72            | 3/16 – 9/32       | 100            |
| PSC4F       | 0.75 – 0.94            | 3/16 – 9/32       | 100            |
| PSC4G       | 0.97 – 1.25            | 3/16 – 9/32       | 100            |
| PSC8A       | 0.22 – 0.28            | 5/16 – 1/2        | 100            |
| PSC8B       | 0.31 – 0.38            | 5/16 – 1/2        | 100            |
| PSC8C       | 0.38 – 0.44            | 5/16 – 1/2        | 100            |
| PSC8D       | 0.47 – 0.56            | 5/16 – 1/2        | 100            |
| PSC8E       | 0.50 – 0.72            | 5/16 – 1/2        | 100            |
| PSC8F       | 0.75 – 0.94            | 5/16 – 1/2        | 100            |
| PSC8G       | 0.97 – 1.25            | 5/16 – 1/2        | 100            |




## Flexible Cable Clip



- Push clip to attach MC or AC cable to metal stud
- No tools required for installation
- Provides fast installation

| Part Number | Cable Size (In.)        | Std. Pkg. Qty. |
|-------------|-------------------------|----------------|
| P449        | 12-2 (0.47 – 0.51 O.D.) | 100            |
|             | 12-3 (0.49 – 0.54 O.D.) |                |
|             | 14-2 (0.43 – 0.48 O.D.) |                |
|             | 14-3 (0.46 – 0.50 O.D.) |                |




## Flexible Conduit/Cable Hangers



- Bundle runs of MC and AC cable
- Can be used with variety of mounting hardware
- Easy to close without the use of tools



| Part Number | Description  | Ultimate Load (Lbs.) | Std. Pkg. Qty. |
|-------------|--|----------------------|----------------|
| PWMX3       | Cable hanger for 1 1/8" diameter bundle – 3 runs of MC/AC. | 50                   | 100            |
| PWMX6       | Cable hanger for 1 3/4" diameter bundle – 6 runs of MC/AC. | 75                   | 100            |



**Support Brackets  
for MC/AC Cable**

Mount with  
self-tapping screws  
found on page G.18!

**Image 1****Image 2**

- Properly space and support MC/AC cable
- Prevent derating of electrical cable
- Comply with NEC Article 310.15 (reference pages K.4 – K.5 for details)



| Part Number | Image No. | Capacity   | Std. Pkg. Qty. |
|-------------|-----------|--|----------------|
| PMCS50      | 1         | Up to 4 runs of MC/AC cable<br>0.43" – 0.56" in diameter | 100            |
| PMCS100     | 2         | Up to 8 runs of MC/AC cable<br>0.43" – 0.56" in diameter | 50             |
| PMCS101     | 2         | Up to 7 runs of MC/AC cable<br>0.56" – 0.69" in diameter | 50             |



# StrongHold™ Cable/Conduit Part Numbers

## Nail/Conduit Brackets




Image 1



Image 2

- Attach conduit to wood, steel, and concrete
- Eliminate offset bends on 1 1/2" box
- No static load rating – for positioning only
- May be attached after positioning conduit


| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| PCNB812M    | 1         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |
| PCNB8P      | 2         | 1/2            | —                    | 100            |
| PCNB12P     | 2         | 3/4            | 1/2                  | 100            |



**Metal Deck/Conduit Brackets**

- Provide spacing between conduit and deck surface
- Eliminate offset bends on 2 1/8" box
- No static load rating – for positioning only
- May be attached after positioning conduit

| Part Number | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|----------------|----------------------|----------------|
| PAOL8P      | 1/2            | —                    | 100            |
| PAOL12P     | 3/4            | 1/2                  | 100            |
| PAOL16P     | 1              | 3/4                  | 100            |



## Screw-On Beam Clamps



PBC

- Attach to beam with screw
- Install with screwdriver, nut driver, or standard wrench
- Incorporate tapped holes to accommodate threaded rod



PBC200





PBC400

| Part Number | Flange Thickness (In.) | Tapped Hole                               | Static Load Rating (Lbs.) | Material          | Std. Pkg. Qty. |
|-------------|------------------------|---|---------------------------|-------------------|----------------|
| PBC*        | Up to 1/2              | 1/4-20 in back and bottom; #10-24 in back | 100                       | Spring Steel      | 100            |
| PBC200      | Up to 1/2              | 1/4-20 in back and bottom                 | 100                       | Zinc Plated Steel | 50             |
| PBC400**    | Up to 15/16            | 3/8-16 in back and bottom                 | 200                       | Zinc Plated Steel | 25             |

\*3/8" non-threaded clearance hole in top and bottom; 1/4" non-threaded clearance hole in back.

\*\*UL and cUL listed.




**Hammer-On Beam Clamps with Attachment Tab**

- Hammer-on installation
- Attachment tab provides 1/4" clearance hole for wire, S-hooks, or chain assemblies
- Static load capacity: 200 lbs.



| Part Number | Flange Thickness (In.) | Std. Pkg. Qty. |
|-------------|------------------------|----------------|
| P4H24       | 1/8 – 1/4              | 100            |
| P4H58       | 5/16 – 1/2             | 100            |
| P4H912      | 9/16 – 3/4             | 100            |



# StrongHold™ Beam/Purlin Part Numbers

## Hammer-On Beam Clamps



Image 1





Image 2

- Hammer-on installation
- Provided with a 1/4-20 thread so that boxes, fixtures, and bridle rings may be quickly and securely attached to the beam flanges (Image 1)
- Also available with 1/4-20 x 3/8" staked stud for easier attachment of outlet boxes to beams; eliminates need to use additional screws (Image 2)
- Static load capacity: 75 lbs.



| Part Number | Image No. | Flange Thickness (in.) | Std. Pkg. Qty. |
|-------------|-----------|------------------------|----------------|
| PM24        | 1         | 1/8 – 1/4              | 100            |
| PM58        | 1         | 5/16 – 1/2             | 100            |
| PM912       | 1         | 9/16 – 3/4             | 100            |
| PM24S       | 2         | 1/8 – 1/4              | 100            |
| PM58S       | 2         | 5/16 – 1/2             | 100            |
| PM912S      | 2         | 9/16 – 3/4             | 100            |



### Reversible Beam Clamps



Image 1

- Used when drop-rod length must be adjusted to accommodate a finished height in the field
- Jam nut included to prevent vibratory loosening
- Manufactured from malleable iron




Image 2



Image 3



| Part Number | Image No. | Flange Thickness (In.) | Threaded Hole | Std. Pkg. Qty. |
|-------------|-----------|------------------------|---------------|----------------|
| P3000037EG  | 1         | 3/4                    | 3/8-16        | 25             |
| P3000050EG  | 1         | 3/4                    | 1/2-13        | 25             |
| P3100037EG  | 2         | 1 1/4                  | 3/8-16        | 25             |
| PBC260025EG | 3         | 1 1/4                  | 1/4-20        | 50             |



# StrongHold™ Beam/Purlin Part Numbers

## Spring Steel Screw-On Beam Clamp Assemblies



Image 1

- Easily attach conduit to beams
- Can be installed on flange up to 1/2" thick
- Include snap-close or push-fit conduit fittings



Image 2




Image 3



Image 4


| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Static Load Rating (Lbs.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|---------------------------|----------------|
| PBC8P       | 1         | 1/2            | —                    | 25                        | 100            |
| PBC12P      | 1         | 3/4            | 1/2                  | 25                        | 100            |
| PBC16P      | 1         | 1              | 3/4                  | 25                        | 100            |
| PBC8PSM     | 2         | 1/2            | —                    | 15                        | 100            |
| PBC12PSM    | 2         | 3/4            | 1/2                  | 15                        | 100            |
| PBC16PSM    | 2         | 1              | 3/4                  | 15                        | 100            |
| PBC812M     | 3         | 1/2 – 3/4      | 1/2 – 3/4            | 100                       | 100            |
| PBC16M      | 3         | 1              | 1                    | 100                       | 100            |
| PBC20M      | 3         | 1 1/4          | 1 1/4                | 100                       | 100            |
| PBC24M      | 3         | 1 1/2          | 1 1/2                | 100                       | 100            |
| PBC32M      | 3         | 2              | 2                    | 100                       | 100            |
| PBC812MSM   | 4         | 1/2 – 3/4      | 1/2 – 3/4            | 25                        | 100            |
| PBC16MSM    | 4         | 1              | 1                    | 25                        | 100            |
| PBC20MSM    | 4         | 1 1/4          | 1 1/4                | 25                        | 100            |
| PBC24MSM    | 4         | 1 1/2          | 1 1/2                | 25                        | 100            |
| PBC32MSM    | 4         | 2              | 2                    | 25                        | 100            |



**Screw-On Beam Clamp Assemblies with  
Conduit Clamps**

- Easily attach conduit to beams up to 1/2" thick
- Conduit clamps provide positive securing feature
- Suitable for EMT or Rigid/IMC conduit

| Part Number  | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|--------------|----------------|----------------------|----------------|
| PBC200CD1B   | 3/4            | 3/4                  | 100            |
| PBC200CD2B   | 1              | 1                    | 100            |
| PBC200CD2.5B | 1 1/4          | —                    | 100            |
| PBC200CD3B   | 1 1/2          | 1 1/4                | 100            |
| PBC200CD4B   | —              | 1 1/2                | 50             |
| PBC200CD5B   | 2              | 2                    | 50             |



# StrongHold™ Beam/Purlin Part Numbers

## Hammer-On Beam Clamps with Rod Hanger



Image 1

- Hammer-on beam clamps allow for easy installation
- Options available for threaded or non-threaded rod
- Options available for flanges 1/8" – 3/4" thick
- Static load capacity: 160 lbs.



Image 2





Image 3



Image 4

| Part Number | Image No. | Flange Thickness (In.) | Rod Size                      | Std. Pkg. Qty. |
|-------------|-----------|------------------------|-------------------------------|----------------|
| P4TI24      | 1         | 1/8 – 1/4              | 1/4-20 threaded               | 100            |
| P4TI58      | 1         | 5/16 – 1/2             | 1/4-20 threaded               | 100            |
| P4TI912     | 1         | 9/16 – 3/4             | 1/4-20 threaded               | 100            |
| P6TI24      | 1         | 1/8 – 1/4              | 3/8-16 threaded               | 100            |
| P6TI58      | 1         | 5/16 – 1/2             | 3/8-16 threaded               | 100            |
| P6TI912     | 1         | 9/16 – 3/4             | 3/8-16 threaded               | 100            |
| P6TA24*     | 2         | 1/8 – 1/4              | 1/4" – 3/8";<br>requires nuts | 100            |
| P6TA58*     | 2         | 5/16 – 1/2             | 1/4" – 3/8";<br>requires nuts | 100            |
| P6A24       | 3         | 1/8 – 1/4              | 3/8" non-threaded             | 100            |
| P6A58       | 3         | 5/16 – 1/2             | 3/8" non-threaded             | 100            |
| P6A912      | 3         | 9/16 – 3/4             | 3/8" non-threaded             | 100            |
| P70824      | 4         | 1/8 – 1/4              | 8 wire or 1/4" plain rod      | 100            |
| P70858      | 4         | 5/16 – 1/2             | 8 wire or 1/4" plain rod      | 100            |
| P708912     | 4         | 9/16 – 3/4             | 8 wire or 1/4" plain rod      | 100            |


\*UL and cUL listed.



**Purlin Clips – Spring Steel****PVF14****PAF14**

- Fasteners fit flanges 1/16" – 1/4" thick
- Support wire and assemblies from vertical or angled flanges
- Hammer-on installation
- Material: spring steel
- Static load capacity: 100 lbs.

| Part Number | Flange Orientation | Std. Pkg. Qty. |
|-------------|--------------------|----------------|
| PVF14       | Vertical           | 100            |
| PAF14       | Angled             | 100            |



## Z-Purlin Clips




P122

- Provide a method for attaching conduit and boxes to angled flanges
- Installed by hand without the use of power tools
- Static load capacity: 100 lbs.



P123

| Part Number | Description                                  | Std. Pkg. Qty. |
|-------------|--|----------------|
| P122        | 1/4" hole for wire, S-hooks, and jack chain. | 100            |
| P123        | 1/4" hole in bottom for assemblies.          | 100            |





**Purlin Clip Assemblies for Threaded Rod  
and Drop Wire Applications****Image 1**

- Suspend threaded rod and drop wire from vertical flange
- Hammer-on installation
- Material: spring steel
- Static load capacity: 160 lbs.
- Flange thickness: 1/16" – 5/32"

**Image 2**

| Part Number | Image No. | Rod Size                  | Std. Pkg. Qty. |
|-------------|-----------|---------------------------|----------------|
| PVF144TI    | 1         | 1/4-20 threaded           | 100            |
| PVF146TI    | 1         | 3/8-16 threaded           | 100            |
| PVF146T     | 1         | 1/4" – 3/8" requires nuts | 100            |
| PVF14708    | 2         | #8 wire or 1/4" plain rod | 100            |



## Z-Purlin Clip Assemblies for Conduit Applications



Image 1

- Provide a method for attaching conduit to angled flanges
- Installed by hand without the use of power tools



Image 2

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Static Load Rating (Lbs.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|---------------------------|----------------|
| P1238P      | 1         | 1/2            | —                    | 25                        | 100            |
| P12312P     | 1         | 3/4            | 1/2                  | 25                        | 100            |
| P12316P     | 1         | 1              | 3/4                  | 25                        | 100            |
| P1236M      | 2         | 3/8            | 3/8                  | 100                       | 100            |
| P123812M    | 2         | 1/2 – 3/4      | 1/2 – 3/4            | 100                       | 100            |
| P12316M*    | 2         | 1              | 1                    | 100                       | 100            |
| P12320M     | 2         | 1 1/4          | 1 1/4                | 100                       | 100            |

\*UL and cUL listed.



**Z-Purlin Clip Assemblies for Threaded Rod  
and Drop Wire Applications****Image 1**

- Provide a method for attaching conduit and boxes to angled flanges
- Installed by hand without the use of power tools
- Static load capacity: 100 lbs.

**Image 2****Image 3**

| Part Number | Image No. | Rod Size                            | Std. Pkg. Qty. |
|-------------|-----------|-------------------------------------|----------------|
| P1224TI     | 1         | 1/4-20 threaded                     | 100            |
| P1226TI     | 1         | 3/8-16 threaded                     | 100            |
| P1226T      | 2         | 1/4" – 3/8" threaded; requires nuts | 100            |
| P122708     | 3         | #8 wire or 1/4" plain rod           | 100            |



## Rod and Wire Hangers with Bracket Supports



Image 1

- Suspend #8 wire, 1/4", and 3/8" non-threaded or threaded rod from overhead mountings
- 1/4" clearance hole in right angle and offset brackets
- Static load capacity: 160 lbs.



Image 2



Image 3



Image 4



Image 5




Image 6



Image 7

| Part Number | Image No. | Rod Size                               | Bracket Orientation | Std. Pkg. Qty. |
|-------------|-----------|--|---------------------|----------------|
| P4TIB       | 1         | 1/4-20 threaded rod                    | Right Angle         | 100            |
| P6TIB       | 1         | 3/8-16 threaded rod                    | Right Angle         | 100            |
| P6TB        | 2         | 1/4" – 3/8" threaded rod; requires nut | Right Angle         | 100            |
| P6AO        | 3         | 3/8 non-threaded rod                   | Offset              | 100            |
| P4TIO       | 4         | 1/4-20 threaded rod                    | Offset              | 100            |
| P6TIO       | 4         | 3/8-16 threaded rod                    | Offset              | 100            |
| P6TO        | 5         | 1/4" – 3/8" threaded rod; requires nut | Offset              | 100            |
| P708AB      | 6         | #8 wire or 1/4" plain rod              | Right Angle         | 100            |
| P708AO      | 7         | #8 wire or 1/4" plain rod              | Offset              | 100            |



# StrongHold™ Hangers/Hanging Systems Part Numbers

## Strap Hangers



Image 1




Image 2

- Support pipe or duct from flange with banding or strapping up to 1" wide
- Options available for beams 1/8" – 3/4" thick
- Hammer-on installation
- Static load capacity: 200 lbs.



| Part Number | Image No. | Flange Thickness (In.) | Std. Pkg. Qty. |
|-------------|-----------|------------------------|----------------|
| PMSS24      | 1         | 1/8 – 1/4              | 100            |
| PMSS58      | 1         | 5/16 – 1/2             | 100            |
| PMSS912     | 1         | 9/16 – 3/4             | 100            |
| PMSR24      | 2         | 1/8 – 1/4              | 100            |
| PMSR58      | 2         | 5/16 – 1/2             | 100            |
| PMSR912     | 2         | 9/16 – 3/4             | 100            |



Mount with  
self-tapping screws  
found on page G.18!

### Electrical Box Mounting Support Brackets





Image 1



Image 2

- Attach 4" or 4 11/16" electrical outlet boxes to studs
- Support feature reduces box movement in wall
- Manufactured from pre-galvanized steel
- Comply with NEC Article 300.4 (D) (reference pages N.1 for details)

| Part Number | Image No. | Stud Depth (In.)    | Std. Pkg. Qty. |
|-------------|-----------|---------------------|----------------|
| PH23        | 1         | 2 1/2 and 3 1/2     | 100            |
| PH4         | 1         | 2 1/2, 3 1/2, and 4 | 100            |
| PH6         | 1         | 6                   | 100            |
| PMEB1       | 2         | 2 1/2, 3 1/2, and 4 | 25             |



## Screw-On Conduit Supports

Mount with  
self-tapping screws  
found on page G.18!



- Comply with NEC Article 358.30 to support conduit close to electrical box
- Accommodate EMT and MC/AC cable
- Allow conduit to align with box knockouts when used with PH series brackets (see page D.1)



| Part Number | Fits EMT (In.) | Electrical Box Depth | Color  | Std. Pkg. Qty. |
|-------------|----------------|----------------------|--------|----------------|
| PCS16*      | 1              | 2 1/8                | Black  | 100            |
| PCS812      | 1/2 – 3/4      | 1 1/2                | Black  | 100            |
| PCS812D     | 1/2 – 3/4      | 2 1/8                | Silver | 100            |

\*Not UL or cUL listed.




## Press-On Nail Plate



- Fast installation; no tools required
- Protects electrical, datacom, and plumbing infrastructure
- Meets NEC Article 300.4 requirements (reference pages N.1 for details)

| Part Number | Description                                  | Std. Pkg. Qty. |
|-------------|--|----------------|
| P304B2      | Press-on nail plate for wood or metal studs. | 100            |



## StrongHold™ Stud Wall Part Numbers

### Hammer-On Box to Stud Supports

Mount with self-tapping screws found on page G.18!



PMSF

- Secure electrical boxes to most metal studs
- Include 1/4" hole to secure to stud with user-supplied screw
- Hammer-on installation




PMFS



PMFO

| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PMSF        | Box to stud support – non-adjustable.                                | 100            |
| PMFS        | Box to stud support with screw, adjustable for 1/4" – 3/4" dry wall. | 100            |
| PMFO        | Box to stud support flush to stud face – preset.                     | 100            |




**Switch Box to Metal  
Stud Brackets**

Mount with  
self-tapping screws  
found on page G.18!



- Secure electrical boxes to most metal studs
- Preset versions offset for specific dry wall thickness
- Include 1/4" hole to secure to stud with user-supplied screw
- Hammer-on installation

| Part Number | Dry Wall Thickness (In.) | Std. Pkg. Qty. |
|-------------|--------------------------|----------------|
| PMF250      | 1/4                      | 100            |
| PMF375      | 3/8                      | 100            |
| PMF500      | 1/2                      | 100            |
| PMF625      | 5/8                      | 100            |
| PMF750      | 3/4                      | 100            |



## StrongHold™ Stud Wall Part Numbers

### Hammer-On Conduit to Metal Stud Brackets

Mount with  
self-tapping screws  
found on page G.18!



Image 1

- Designed to quickly install conduit to metal studs
- Available in push-fit (Image 1) or snap-close (Image 2) fittings
- Suitable for both EMT and Rigid/IMC conduit



Image 2

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| P8PF        | 1         | 1/2            | —                    | 100            |
| P12PF       | 1         | 3/4            | 1/2                  | 100            |
| P16PF       | 1         | 1              | 3/4                  | 100            |
| P6MF        | 2         | 3/8            | 3/8                  | 100            |
| P812MF      | 2         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |
| P16MF       | 2         | 1              | 1                    | 100            |




## Screw-On Box to Stud Support

Mount with self-tapping screws found on page G.18!



- Installs to stud with user-supplied screws
- For use with metal or wood studs
- Used independently or with assemblies for electrical box or conduit support

| Part Number | Description                        | Std. Pkg. Qty. |
|-------------|------------------------------------|----------------|
| P350        | Screw-mounted box to stud support. | 100            |



## Screw-On Conduit to Stud Supports


Mount with self-tapping screws found on page G.18!



Image 1    Image 2

- Designed to install runs of conduit to metal studs
- Suitable for EMT and Rigid/IMC conduit
- Available in push-fit (Image 1) or snap-close (Image 2) fittings

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| P3508P      | 1         | 1/2            | —                    | 100            |
| P35012P     | 1         | 3/4            | 1/2                  | 100            |
| P35016P     | 1         | 1              | 3/4                  | 100            |
| P350812M    | 2         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |
| P35016M     | 2         | 1              | 1                    | 100            |



# StrongHold™ Stud Wall Part Numbers

## Far-Side Box Supports



Image 1





Image 2



Image 3

- Clip to electrical box to utilize dry wall on far side of box for support
- Used with 1 1/2" or 2 1/8" deep electrical box
- Prevent electrical box from recessing into wall cavity
- No static load rating – for positioning only

| Part Number | Image No. | Figure No. | Stud Depth (In.) | Std. Pkg. Qty. |
|-------------|-----------|------------|------------------|----------------|
| PJ1A25      | 1         | 1          | 2 1/2            | 100            |
| PJ1A35      | 1         | 1          | 3 1/2            | 100            |
| PJ1A4       | 1         | 1          | 4                | 100            |
| PJ1A6       | 1         | 1          | 6                | 100            |
| P766        | 2         | 1          | 2 1/2 – 4        | 100            |
| P766PMD     | 3         | 2          | 3 5/8            | 100            |




**Adjustable Screw Gun  
Box Mounting Brackets****Mount with  
self-tapping screws  
found on page G.18!**

- Adjustable to allow variability between stud spacing
- Utilized to mount electrical box between studs
- Suitable for 1 1/2" or 2 1/8" deep electrical boxes



| Part Number | Description                               | Std. Pkg. Qty. |
|-------------|---|----------------|
| PTSGB16     | Mount box between studs spaced 11" – 18". | 50             |
| PTSGB24     | Mount box between studs spaced 17" – 26". | 50             |



## StrongHold™ Stud Wall Part Numbers

### Rigid Box Mounting Brackets

Mount with  
self-tapping screws  
found on page G.18!



PRBS16




PRBS24

- Used to secure multiple electrical boxes in stud walls
- Mount 1 1/2" or 2 1/8" deep electrical boxes
- Suitable for 4" or 4 11/16" wide electrical boxes



| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PRBS16      | Rigid box mounting bracket for 16" stud spacing; capacity of three electrical boxes. | 50             |
| PRBS24*     | Rigid box mounting bracket for 24" stud spacing; capacity of four electrical boxes.  | 25             |

\*Not UL or cUL listed.



**Stud-Mounted Box  
Support Brackets**


Mount with  
self-tapping screws  
found on page G.18!



- User-supplied self-tapping screws attach box to bracket
- Manufactured from pre-galvanized steel

**PSGB16A**

| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PSGB16A     | Mounts 2 1/2" deep electrical boxes to studs on 16" centers. | 50             |
| PSGB24A     | Mounts 2 1/2" deep electrical boxes to studs on 24" centers. | 50             |



### Floor-Mounted Box Support Bracket – Variable Height



- Bracket to support electrical boxes from floor or channels
- Break-away feature allows product to be used at three heights
- Manufactured from pre-galvanized steel

| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PFBS18      | Box support bracket to mount electrical boxes at 12", 16", or 18" heights. | 50             |



**Floor-Mounted Box Bracket**


Mount with  
self-tapping screws  
found on page G.18!



- Supports electrical box at consistent spacing from floor level
- Features can be used to prevent electrical box from being pushed into wall cavity
- Mounts 4" or 4 11/16" wide electrical boxes; 1 1/2" or 2 1/8" deep
- Meets ADA (Americans with Disabilities Act) accessibility guidelines/standards



| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PFMBS18     | Floor-mounted box bracket to mount center of electrical box 18" off floor. | 25             |

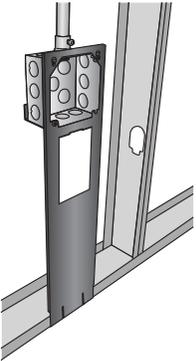

# StrongHold™ Stud Wall Part Numbers

## Cable Support Clip

Mount with  
self-tapping screws  
found on page G.18!



- Used to maintain appropriate cable spacing behind dry wall to comply with NEC Article 300.4 (D) (reference pages K.1 – K.2 for details)
- Attaches to wood or metal stud with user-supplied screws
- Accommodates a variety of cable types



| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PCJ6        | Cable support clip to provide 1 1/2" spacing for cables behind dry wall. | 100            |

| Cable Type   | Cables Per Clip | Cable Size   |
|--------------|-----------------|--|
| Non-metallic | 6               | 14-2, 12-2, 10-2, 14-3, 12-3, 10-3 with ground                   |
| Non-metallic | 4               | 8-2, 6-2 with ground   |
| MC/AC        | 4               | 14-2, 12-2, 10-2, 14-3, 12-3, 10-3, 14-4, 12-4, 10-4 with ground |



**Cable Support Clip  
for Single Cable**

Mount with  
self-tapping screws  
found on page G.18!



- Used to maintain appropriate cable spacing behind dry wall to comply with NEC Article 300.4 (D) (reference pages K.1 – K.2 for details)
- Provides 1 1/2" spacing for cables behind dry wall
- Attaches to wood or metal studs with hammer

| Part Number | Description                                   | Std. Pkg. Qty. |
|-------------|---|----------------|
| PFXC20      | Accommodates MC/AC cable (12-2 through 10-3). | 100            |



## StrongHold™ Stud Wall Part Numbers

### Through-Stud Conduit Supports

Mount with  
self-tapping screws  
found on page G.18!




Image 1



Image 2

- Designed to secure horizontal runs of conduit through metal studs
- Eliminate rattling conduit
- Available with push-fit (Image 1) or snap-close (Image 2) conduit fittings

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| PFB8P       | 1         | 1/2            | —                    | 100            |
| PFB12P      | 1         | 3/4            | 1/2                  | 100            |
| PFB6M       | 2         | 3/8            | 3/8                  | 100            |
| PFB812M     | 2         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |




**Metal Stud Grommets****MSG-1.3-C**

- Install in pre-punched hole in metal studs
- Protect cable within the building structure
- Utilize metal stud punch tool (see page D.18) to create suitable holes in specific locations

**MSGV-1.3-C**

| Part Number | Description   | Std. Pkg. Qty. |
|-------------|---|----------------|
| MSG-1.3-C   | Metal stud grommet.   | 100            |
| MSGV-1.3-C  | Metal stud grommet, anti-vibration tabs for 1/2" – 1" pipe. | 100            |




## StrongHold™ Stud Wall Part Numbers

### Cable Manager



- Installs in pre-punched hole in metal studs
- Protects cable within the building structure
- Utilizes metal stud punch tool (see page D.18) to create suitable holes in specific locations

| Part Number | Description                                  | Std. Pkg. Qty. |
|-------------|--|----------------|
| CSM-1.25-C  | Cable stud manager for 1 1/4" cable spacing. | 100            |



**Metal Stud Punch Tool**

- Punches 1 11/32" round hole in 25 gauge minimum to 20 gauge maximum mild steel studs
- Contoured handle allows for increased leverage
- Automatic hole centering on standard width (3 5/8") studs
- Replaceable punch and dies
- Self-stripping design that eliminates punch malfunctions

| Part Number | Description            | Std. Pkg. Qty. |
|-------------|------------------------|----------------|
| MSPT-1.3    | Metal stud punch tool. | 1              |


**Self-Tapping Screw**

- Used to secure StrongHold™ components to metal studs
- Low profile head utilizes #2 phillips head
- Packaging: plastic job jar

| Part Number | Description                              | Std. Pkg. Qty. |
|-------------|--|----------------|
| PSMS8       | 8 x 1/2" low profile self-tapping screw. | 1000           |

**J-Pro™ Series Referenced Images**

- UL listed for use in plenum or air handling spaces (such as ceiling voids and underfloor areas) per NEC Article 300.22 (C) and (D) (reference pages N.2 – N.4 for details)
- Complete horizontal and vertical 1" bend radius control

**Image 1****Image 2****Image 3****Image 4****Image 5****Image 6****Image 7****Image 8****Image 9****Image 10****Image 11****Image 12**

**J-Pro™ JP75 Series**

- Bundle capacity: 3/4"
- Cable capacity: Category 6A (5), Category 6A (SD) (8), Category 6 (8), Category 5e (10)

| Part Number     | Image No. | Description   | Std. Pkg. Qty. |
|-----------------|-----------|---|----------------|
| JP75W-L20       | 1         | Wall mount – one 1/4" mounting hole.  | 50             |
| JP75WP2B-L20    | 2         | Wall mount for powder actuated fasteners – one 5/32" and one 1/4" mounting hole.          | 50             |
| JP75CMB-L20     | 3         | Ceiling mount – 3/16", 1/4", and 3/8" mounting holes.                                     | 50             |
| JP75DW-L20      | 4         | Drop wire and threaded rod clip mount.  | 50             |
| JP75SBC50-L20   | 5         | Screw-on beam clamp mount – up to 1/2" flange.  | 50             |
| JP75SBC50RB-L20 | 6         | Screw-on beam clamp mount – up to 1/2" flange. Rotates 360°.                              | 50             |
| JP75SBC87-L20   | 7         | Screw-on beam clamp mount – up to 3/4" flange.  | 50             |
| JP75SBC87RB-L20 | 8         | Screw-on beam clamp mount – up to 3/4" flange. Rotates 360°.                              | 50             |
| JP75HBC25RB-L20 | 9         | Hammer-on beam clamp mount – 1/8" - 1/4" flange. Rotates 360°.                            | 50             |
| JP75HBC50RB-L20 | 9         | Hammer-on beam clamp mount – 5/16" – 1/2" flange. Rotates 360°.                           | 50             |
| JP75HBC75RB-L20 | 9         | Hammer-on beam clamp mount – 9/16" – 3/4" flange. Rotates 360°.                           | 50             |
| JP75CP-L20      | 10        | C-purlin clips for straight flanges up to 1/4" thick.                                     | 50             |
| JP75ZP-L20      | 11        | Z-purlin clips for angled flanges up to 1/4" thick.                                       | 50             |
| JP75UF100-L20   | 12        | Underfloor pedestal support clip for pedestal 7/8" square or 1 1/8" – 1 3/8" in diameter. | 50             |

## J-Pro™ JP131 Series

- Bundle capacity: 1 5/6"
- Cable capacity: Category 6A (15), Category 6A (SD) (25), Category 6 (25), Category 5e (29)

| Part Number     | Image No. | Description   | Std. Pkg. Qty. |
|-----------------|-----------|---|----------------|
| JP131W-L20      | 1         | Wall mount – one 1/4" mounting hole.  | 50             |
| JP131WP2B-L20   | 2         | Wall mount for powder actuated fasteners – one 5/32" and one 1/4" mounting hole.          | 50             |
| JP131CMB-L20    | 3         | Ceiling mount – 3/16", 1/4", and 3/8" mounting holes.                                     | 50             |
| JP131DW-L20     | 4         | Drop wire and threaded rod clip mount.  | 50             |
| JP131SBC50-L20  | 5         | Screw-on beam clamp mount – up to 1/2" flange.  | 50             |
| JP131SBC50RBL20 | 6         | Screw-on beam clamp mount – up to 1/2" flange. Rotates 360°.                              | 50             |
| JP131SBC87-L20  | 7         | Screw-on beam clamp mount – up to 3/4" flange.  | 50             |
| JP131SBC87RBL20 | 8         | Screw-on beam clamp mount – up to 3/4" flange. Rotates 360°.                              | 50             |
| JP131HBC25RBL20 | 9         | Hammer-on beam clamp mount – 1/8" – 1/4" flange. Rotates 360°.                            | 50             |
| JP131HBC50RBL20 | 9         | Hammer-on beam clamp mount – 5/16" – 1/2" flange. Rotates 360°.                           | 50             |
| JP131HBC75RBL20 | 9         | Hammer-on beam clamp mount – 9/16" – 3/4" flange. Rotates 360°.                           | 50             |
| JP131CP-L20     | 10        | C-purlin clips for straight flanges up to 1/4" thick.                                     | 50             |
| JP131ZP-L20     | 11        | Z-purlin clips for angled flanges up to 1/4" thick.                                       | 50             |
| JP131UF100-L20  | 12        | Underfloor pedestal support clip for pedestal 7/8" square or 1 1/8" – 1 3/8" in diameter. | 50             |

**J-Pro™ JP2 Series**

- Bundle capacity: 2"
- Cable capacity: Category 6A (30), Category 6A (SD) (46), Category 6 (46), Category 5e (55)

| Part Number    | Image No. | Description   | Std. Pkg. Qty. |
|----------------|-----------|---|----------------|
| JP2W-L20       | 1         | Wall mount – one 1/4" mounting hole.  | 50             |
| JP2WP2B-L20    | 2         | Wall mount for powder actuated fasteners – one 5/32" and one 1/4" mounting hole.          | 50             |
| JP2CMB-L20     | 3         | Ceiling mount – 3/16", 1/4", and 3/8" mounting holes.                                     | 50             |
| JP2DW-L20      | 4         | Drop wire and threaded rod clip mount.  | 50             |
| JP2SBC50-L20   | 5         | Screw-on beam clamp mount – up to 1/2" flange.  | 50             |
| JP2SBC50RB-L20 | 6         | Screw-on beam clamp mount – up to 1/2" flange. Rotates 360°.                              | 50             |
| JP2SBC87-L20   | 7         | Screw-on beam clamp mount – up to 3/4" flange.  | 50             |
| JP2SBC87RB-L20 | 8         | Screw-on beam clamp mount – up to 3/4" flange. Rotates 360°.                              | 50             |
| JP2HBC25RB-L20 | 9         | Hammer-on beam clamp mount – 1/8" – 1/4" flange. Rotates 360°.                            | 50             |
| JP2HBC50RB-L20 | 9         | Hammer-on beam clamp mount – 5/16" – 1/2" flange. Rotates 360°.                           | 50             |
| JP2HBC75RB-L20 | 9         | Hammer-on beam clamp mount – 9/16" – 3/4" flange. Rotates 360°.                           | 50             |
| JP2CP-L20      | 10        | C-purlin clips for straight flanges up to 1/4" thick.                                     | 50             |
| JP2ZP-L20      | 11        | Z-purlin clips for angled flanges up to 1/4" thick.                                       | 50             |
| JP2UF100-L20   | 12        | Underfloor pedestal support clip for pedestal 7/8" square or 1 1/8" – 1 3/8" in diameter. | 50             |

## J-Pro™ JP4 Series

- Bundle capacity: 4"
- Cable capacity: Category 6A (115), Category 6A (SD) (180), Category 6 (180), Category 5e (200)

| Part Number    | Image No. | Description   | Std. Pkg. Qty. |
|----------------|-----------|---|----------------|
| JP4W-X20       | 1         | Wall mount – one 1/4" mounting hole.  | 10             |
| JP4WP2B-X20    | 2         | Wall mount for powder actuated fasteners – one 5/32" and one 1/4" mounting hole.          | 10             |
| JP4CMB-X20     | 3         | Ceiling mount – 3/16", 1/4", and 3/8" mounting holes.                                     | 10             |
| JP4SBC50-X20   | 5         | Screw-on beam clamp mount – up to 1/2" flange.  | 10             |
| JP4SBC50RB-X20 | 6         | Screw-on beam clamp mount – up to 1/2" flange. Rotates 360°.                              | 10             |
| JP4SBC87-X20   | 7         | Screw-on beam clamp mount – up to 3/4" flange.  | 10             |
| JP4SBC87RB-X20 | 8         | Screw-on beam clamp mount – up to 3/4" flange. Rotates 360°.                              | 10             |
| JP4HBC25RB-X20 | 9         | Hammer-on beam clamp mount – 1/8" – 1/4" flange. Rotates 360°.                            | 10             |
| JP4HBC50RB-X20 | 9         | Hammer-on beam clamp mount – 5/16" – 1/2" flange. Rotates 360°.                           | 10             |
| JP4HBC75RB-X20 | 9         | Hammer-on beam clamp mount – 9/16" – 3/4" flange. Rotates 360°.                           | 10             |
| JP4CP-X20      | 10        | C-purlin clips for straight flanges up to 1/4" thick.                                     | 10             |
| JP4ZP-X20      | 11        | Z-purlin clips for angled flanges up to 1/4" thick.                                       | 10             |
| JP4UF100-X20   | 12        | Underfloor pedestal support clip for pedestal 7/8" square or 1 1/8" – 1 3/8" in diameter. | 10             |

**J-Pro™ Extension Bracket**

- Compatible with 3/4", 1 5/16", and 2" J-Pro™ products
- Allows multiple hooks to be installed utilizing one attachment point
- Includes 1/8", 1/4", and 3/8" mounting holes for various user-supplied hardware

| Part Number | Description                                 | Std. Pkg. Qty. |
|-------------|---|----------------|
| PCATHBA     | Multi-tier bracket for J-Pro™ product line. | 10             |



Bend appropriate tabs with flathead screwdriver to prevent intended hook from rotating once installed.

Install appropriate J-Pro™ wall-mounted hook with user-supplied hardware.



## J-Pro™ Color Selection Guide

| Base Part Number | Black | Red | Blue | White | Green | Orange |
|------------------|-------|-----|------|-------|-------|--------|
| JP75W            | -L20  | -L2 |      |       | -L5   | -L3    |
| JP75WP2B         | -L20  |     |      |       |       |        |
| JP75CMB          | -L20  | -L2 |      |       |       |        |
| JP75DW           | -L20  | -L2 | -L6  |       |       |        |
| JP75ZP           | -L20  |     |      |       |       |        |
| JP75CP           | -L20  |     |      |       |       |        |
| JP75SBC50        | -L20  |     |      |       |       |        |
| JP75SBC87        | -L20  |     |      |       |       |        |
| JP75SBC50RB      | -L20  | -L2 |      | -L    |       |        |
| JP75SBC87RB      | -L20  |     |      |       |       |        |
| JP75HBC25RB      | -L20  |     |      |       |       |        |
| JP75HBC50RB      | -L20  | -L2 |      | -L    |       |        |
| JP75HBC75RB      | -L20  |     |      |       |       |        |
| JP75UF100        | -L20  |     |      |       |       |        |
| JP131W           | -L20  |     | -L6  |       | -L5   | -L3    |
| JP131WP2B        | -L20  |     |      |       |       |        |
| JP131CMB         | -L20  |     |      |       |       |        |
| JP131DW          | -L20  |     | -L6  |       |       |        |
| JP131ZP          | -L20  |     |      |       |       |        |
| JP131CP          | -L20  |     |      |       |       |        |
| JP131SBC50       | -L20  |     |      |       |       |        |
| JP131SBC87       | -L20  |     |      |       |       |        |
| JP131SBC50RB     | -L20  | -L2 |      | -L    |       |        |
| JP131SBC87RB     | -L20  |     |      |       |       |        |
| JP131HBC25RB     | -L20  |     |      |       |       |        |
| JP131HBC50RB     | -L20  | -L2 |      | -L    |       |        |
| JP131HBC75RB     | -L20  |     |      |       |       |        |
| JP131UF100       | -L20  |     |      |       |       |        |
| JP2W             | -L20  | -L2 | -L6  | -L    | -L5   | -L3    |
| JP2WP2B          | -L20  |     |      |       |       |        |
| JP2CMB           | -L20  | -L2 |      |       |       |        |
| JP2DW            | -L20  | -L2 | -L6  | -L    |       |        |
| JP2ZP            | -L20  |     |      |       |       |        |
| JP2CP            | -L20  |     |      |       |       |        |
| JP2SBC50         | -L20  |     |      | -L    |       |        |
| JP2SBC87         | -L20  |     |      |       |       |        |
| JP2SBC50RB       | -L20  | -L2 |      | -L    |       |        |
| JP2SBC87RB       | -L20  | -L2 |      |       |       |        |
| JP2HBC25RB       | -L20  |     |      |       |       |        |
| JP2HBC50RB       | -L20  | -L2 |      | -L    |       |        |

Table continues on page H.8

**J-Pro™ Color Selection Guide (continued)**

| Base Part Number | Black | Red | Blue | White | Green | Orange |
|------------------|-------|-----|------|-------|-------|--------|
| JP2HBC75RB       | -L20  |     |      |       |       |        |
| JP2UF100         | -L20  |     |      |       |       |        |
| JP4W             | -X20  | -X2 | -X6  | -X    |       |        |
| JP4WP2B          | -X20  |     |      |       |       |        |
| JP4CMB           | -X20  |     |      |       |       |        |
| JP4ZP            | -X20  |     |      |       |       |        |
| JP4CP            | -X20  |     |      |       |       |        |
| JP4SBC50         | -X20  |     |      | -X    |       |        |
| JP4SBC87         | -X20  |     |      |       |       |        |
| JP4SBC50RB       | -X20  | -X2 |      | -X    |       |        |
| JP4SBC87RB       | -X20  |     |      |       |       |        |
| JP4HBC25RB       | -X20  |     |      |       |       |        |
| JP4HBC50RB       | -X20  | -X2 |      | -X    |       |        |
| JP4HBC75RB       | -X20  |     |      |       |       |        |
| JP4UF100         | -X20  |     |      |       |       |        |

## J-Mod® Series Referenced Images

- UL listed for use in plenum or air handling spaces (such as ceiling voids and underfloor areas) per NEC Article 300.22 (C) and (D) (reference pages N.2 – N.4 for details)
- Complete horizontal and vertical 1" bend radius control



Image 1



Image 2



Image 3



Image 4



Image 5



Image 6



Image 7



Image 8



Image 9



Image 10



Image 11

**J-Mod® Series Installation Instructions**

Align snap lock attachment of J-hook with holes in chosen bracket and snap J-hook into place.



Align chaining bracket under the assembly.



Slide chaining bracket between J-hook and the metal bracket until it snaps.




Pull down to fully engage.



Attach J-hooks as explained in first-level installation above.



Final assembly is a second-level installation consisting of one threaded rod bracket, one chaining bracket, and two J-hooks for clarity.



## J-Mod® Series

- Bundle capacity: 2"
- Cable capacity: Category 6A (30), Category 6A (SD) (46), Category 6 (46), Category 5e (55)

| Part Number  | Image No. | Description   | Std. Pkg. Qty. |
|--------------|-----------|---|----------------|
| JMJH2W-X20   | 1         | J-hook for wall mount applications only; two 1/4" mounting holes for user supplied screws.                              | 10             |
| JMJH2-X20    | 2         | J-hook for use with J-Mod® brackets.  | 10             |
| JMCB-X       | 3         | Chaining bracket to extend existing J-Mod® capacity; for use with single-level mounting brackets; three levels maximum. | 10             |
| JMCMB25-1-X  | 4         | Single-level ceiling mount bracket with one 1/4" mounting hole.   | 10             |
| JMCMB25-3-X  | 5         | Three-level ceiling mount bracket with one 1/4" mounting hole.  | 10             |
| JMDWB-1-X    | 6         | Single-level drop wire bracket that attaches to #12 wire or 1/4" threaded rod.  | 10             |
| JMDWB-3-X    | 7         | Three-level drop wire bracket that attaches to #12 wire or 1/4" threaded rod.   | 10             |
| JMTRB38-1-X  | 8         | Single-level threaded rod bracket; accepts 1/4" – 3/8" threaded rod.  | 10             |
| JMTRB38-3-X  | 9         | Three-level threaded rod bracket; accepts 1/4" – 3/8" threaded rod.   | 10             |
| JMSBCB87-1-X | 10        | Single-level screw-on beam clamp bracket for use with flanges up to 3/4" thick.   | 10             |
| JMSBCB87-3-X | 11        | Three-level screw-on beam clamp bracket for use with flanges up to 3/4" thick.  | 10             |

**Hook and Loop Cable Ties**



Image 1




Image 2

- Soft, premium material is safe for use on high-performance communication cable
- UL listed for use in plenum or air handling spaces (such as ceiling voids and underfloor areas) per NEC Article 300.22 (C) and (D) (reference pages N.2 – N.4 for details)
- Material flammability rating: UL 94V-2
- Adjustable, releasable, and re-useable multiple times; ideal for moves, adds, and changes



| Part Number  | Image No. | Length (In.) | Width (In.) | Max. Bundle Dia. (In.) | Color  | Std. Pkg. Qty. |
|--------------|-----------|--------------|-------------|------------------------|--------|----------------|
| HLTP2I-X12   | 1         | 8.00         | 0.50        | 1.91                   | Maroon | 10             |
| HLTP3I-X12   | 1         | 12.00        | 0.50        | 3.18                   | Maroon | 10             |
| HLTP2I-X0    | 1         | 8.00         | 0.50        | 1.91                   | Black  | 10             |
| HLTP3I-X0    | 1         | 12.00        | 0.50        | 3.18                   | Black  | 10             |
| HLSP1.5S-X12 | 2         | 6.00         | 0.75        | 1.50                   | Maroon | 10             |
| HLSP3S-X12   | 2         | 12.00        | 0.75        | 3.20                   | Maroon | 10             |
| HLSP5S-X12   | 2         | 18.00        | 0.75        | 5.00                   | Maroon | 10             |
| HLSP1.5S-X0  | 2         | 6.00         | 0.75        | 1.50                   | Black  | 10             |
| HLSP3S-X0    | 2         | 12.00        | 0.75        | 3.20                   | Black  | 10             |
| HLSP5S-X0    | 2         | 18.00        | 0.75        | 5.00                   | Black  | 10             |




### Contractor Grade Hook and Loop Cable Ties



- Strong, low-profile, flexible material that is safe to use on high-performance cabling
- Cost-effective for general bundling
- Color: Black

| Part Number | Length (Feet) | Width (In.) | Max. Bundle Dia. (In.) | Std. Pkg. Qty.     |
|-------------|---------------|-------------|------------------------|--------------------|
| TTS-35R3-0  | 35.00         | 0.75        | Various                | 1 pkg. of 3 rolls  |
| TTS-35RX0   | 35.00         | 0.75        | Various                | 1 pkg. of 10 rolls |
| TTS-75R0    | 75.00         | 0.75        | Various                | 1 pkg. of 10 rolls |



**Bridle Rings Referenced Images**



**Image 1**



**Image 2**




**Image 3**



**Image 4**



**Image 5**



## Bridle Rings

- Suitable for low-voltage cabling
- Not suitable for high-performance communication cabling
- Variety of mounting options available to support specific application requirements



| Part Number    | Image No. | Description  | Std. Pkg. Qty. |
|----------------|-----------|--|----------------|
| BR-50-10-24    | 1         | 1/2" capacity – mounts with 10-24 threads.                                     | 100            |
| BR-75-10-24    | 1         | 3/4" capacity – mounts with 10-24 threads.                                     | 100            |
| BR-1.25-10-24  | 1         | 1 1/4" capacity – mounts with 10-24 threads.                                   | 100            |
| BR-2.0-10-24   | 1         | 2" capacity – mounts with 10-24 threads.                                       | 100            |
| BR-1.25-1/4-20 | 1         | 1 1/4" capacity – mounts with 1/4"-20 threads.                                 | 100            |
| BR-2.0-1/4-20  | 1         | 2" capacity – mounts with 1/4"-20 threads.                                     | 100            |
| BR-4.0-1/4-20  | 1         | 4" capacity – mounts with 1/4"-20 threads.                                     | 50             |
| BR-1.25-14WS   | 2         | 1 1/4" capacity – mounts with #14 wood screw thread.                           | 100            |
| BR-2.0-14WS    | 2         | 2" capacity – mounts with #14 wood screw thread.                               | 100            |
| BR-1.5-PAF     | 3         | 1 1/2" capacity – mounts with powder actuated fastener.                        | 50             |
| BR-2.0-PAF     | 3         | 2" capacity – mounts with powder actuated fastener.                            | 50             |
| BR-1.5-SN      | 4         | 1 1/2" capacity – mounts with screws, nails, or other user supplied fasteners. | 100            |
| BR-2.0-SN      | 4         | 2" capacity – mounts with screws, nails, or other user supplied fasteners.     | 100            |
| BR-1.5-TW      | 5         | 1 1/2" capacity – mounts with toggle screw.                                    | 25             |
| BR-2.0-TW      | 5         | 2" capacity – mounts with toggle screw.  | 25             |

## Bridle Rings with Saddles



Image 1

- Plastic saddles allow bridle rings to be used for communication cable
- Suitable for use in air handling spaces
- Available pre-installed or can be ordered separately to be installed by the user




Image 2



Image 3



| Part Number    | Image No. | Description   | Std. Pkg. Qty. |
|----------------|-----------|---|----------------|
| BR-1.5-1/4-20S | 1         | Bridle ring with saddle – 1.5" capacity – mounts with 1/4-20 threads.         | 50             |
| BR-2.0-1/4-20S | 1         | Bridle ring with saddle – 2" capacity – mounts with 1/4-20 threads.           | 50             |
| BR-4.0-1/4-20S | 1         | Bridle ring with saddle – 4" capacity – mounts with 1/4-20 threads.           | 50             |
| BR-1.5-14WSS   | 2         | Bridle ring with saddle – 1.5" capacity – mounts with #14 wood screw threads. | 50             |
| BR-2.0-14WSS   | 2         | Bridle ring with saddle – 2" capacity – mounts with #14 wood screw threads.   | 50             |
| BRS-1.5        | 3         | Saddle only for 1.5" – diameter bridle ring.                                  | 100            |
| BRS-2.0        | 3         | Saddle only for 2" – diameter bridle ring.                                    | 100            |



## Low-Voltage Mounting Brackets

Mount with  
self-tapping screws  
found on page G.18!



Image 1

- Choose design styles for new or retrofit installations
- Available in both single and double gang configurations
- Manufactured from galvanized steel materials



Image 2



Image 3



Image 4




| Part Number | Image No. | Description   | Std. Pkg. Qty. |
|-------------|-----------|---|----------------|
| LV-S-1G     | 1         | Single gang, low-voltage mounting bracket for new installations.  | 25             |
| LV-S-2G     | 2         | Double gang, low-voltage mounting bracket for new installations.  | 25             |
| LV-W-1G     | 3         | Single gang, low-voltage mounting bracket for retrofit installations; suitable for wall material thicknesses for 1/2" – 1 1/2". | 100            |
| LV-W-2G     | 4         | Double gang, low-voltage mounting bracket for retrofit installations; suitable for wall material thicknesses for 1/2" – 1 1/2". | 50             |



**Old Work Box Mount**

- Prevents electrical box from pulling away from dry wall
- Supports box to dry wall to prevent mounting directly to stud
- Allows quick installation with no tools required
- Manufactured from pre-galvanized steel

| Part Number | Description                         | Std. Pkg. Qty. |
|-------------|-------------------------------------|----------------|
| PDSI2A      | Secures electrical box to dry wall. | 100            |

**Wiring Device Retainer**

- Provides stability and prevents broken cover plates
- Manufactured from pre-galvanized steel

| Part Number | Description   | Std. Pkg. Qty. |
|-------------|---|----------------|
| PRLC        | Mounts standard outlet or switch in oversized openings. | 100            |




**Troffer Fastener Clip**



- Positive clip-on support for troffers/lay-in fixtures
- Fits round or rectangular head T-bars
- Complies with NEC Article 410.36 requirements (reference pages N.11 for details)
- For upturned or straight lip fixtures



| Part Number | Description              | Std. Pkg. Qty. |
|-------------|--------------------------|----------------|
| P515A       | T-bar clip for troffers. | 100            |




**T-Bar Clip**



- Supports outlet boxes above acoustical T-bar
- Top-mounted applications
- Used in conjunction with T-bar clip top-mount assemblies to eliminate the need for offset bending conduit
- Meets NEC Article 300.11 requirements (reference page N.2 for details)

| Part Number | Description                           | Std. Pkg. Qty. |
|-------------|---------------------------------------|----------------|
| PATA4I      | T-bar clip with 1/4-20 mounting hole. | 100            |



## T-Bar Clip Top-Mount Assemblies



Image 1




Image 2

- For supporting conduit above acoustical T-bar
- Top-mounted applications
- Used in conjunction with T-bar clips mounted to electrical boxes to eliminate the need for offset bending conduit
- Meet NEC Article 300.11 requirements (reference page N.2 for details)

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| P8PATA      | 1         | 1/2            | —                    | 100            |
| P12PATA     | 1         | 3/4            | 1/2                  | 100            |
| P16PATA     | 1         | 1              | 3/4                  | 100            |
| P6MATA      | 2         | 3/8*           | 3/8                  | 100            |
| P812MATA    | 2         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |
| P16MATA     | 2         | 1              | 1                    | 100            |

\*Or 14-2 through 12-3 MC/AC cable.



## T-Bar Clip Side-Mount Assemblies



Image 1




Image 2

- Support conduit above acoustical T-bar in side-mounted applications
- Used in conjunction with T-bar clips mounted to electrical boxes to eliminate the need for offset bending conduit
- Meets NEC Article 300.11 requirements (reference page N.2 for details)

| Part Number | Image No. | Fits EMT (In.) | Fits Rigid/IMC (In.) | Std. Pkg. Qty. |
|-------------|-----------|----------------|----------------------|----------------|
| P8PATS      | 1         | 1/2            | —                    | 100            |
| P12PATS     | 1         | 3/4            | 1/2                  | 100            |
| P16PATS     | 1         | 1              | 3/4                  | 100            |
| P6MATS      | 2         | 3/8*           | 3/8                  | 100            |
| P812MATS    | 2         | 1/2 – 3/4      | 1/2 – 3/4            | 100            |
| P16MATS     | 2         | 1              | 1                    | 100            |

\*Or 14-2 through 12-3 MC/AC cable.




**T-Bar Drop Wire Clip**

- Provides a means to support fixtures from building structure instead of T-bar
- Includes 5/8" stud and wing nut washer
- Accommodates 1" T-bar
- Manufactured from pre-galvanized materials



| Part Number | Description                                 | Static Load Rating (Lbs.) | Std. Pkg. Qty. |
|-------------|---|---------------------------|----------------|
| PIDS        | T-bar drop wire clip for use with 1" T-bar. | 65                        | 50             |

**T-Bar Fastener**

- Provides method of attaching conduit and electrical boxes above T-bar
- Allows secure screw attachment to T-bar
- Eliminates offset bend in conduit

| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| P4ACS       | Conduit and box support for T-bar with 1/4-20 threaded impression. | 100            |



## Box to T-Bar Fasteners



Image 1

- Accommodate 24" T-bar span
- Non-adjustable version is suitable for flush or offset mount
- Adjustable version provides for 8" adjustments allowing the installation of double deep boxes, speaker cases, and emergency light fixtures above T-bar



Image 2



Image 3



Image 4




Image 5



| Part Number | Image No. | Description  | Std. Pkg. Qty. |
|-------------|-----------|--|----------------|
| P512        | 1         | Box to T-bar fastener for flush or 3/4" offset mount.                      | 50             |
| P512A       | 2         | Box to T-bar fastener allows up to 8" of height adjustment.                | 25             |
| PBHC*       | 3         | Additional box mounting clip with screw for P512 and P512A.                | 100            |
| P512HD      | 4         | Heavy duty box to t-bar fastener for 24" span. Includes box mounting clip. | 25             |
| P510HD      | 5         | Additional box mounting clip for P512HD.                                   | 100            |

\*Not UL or cUL listed.



## Heavy Duty Adjustable Box Mounting Bar Hangers

**P512HDK****P512HDT**

- Box fastener adjustable for 16" – 24" ceiling joist/stud spacing
- Allow versatility in installing electrical boxes along the length of the bar
- Install quickly and easily between ceiling joists or wall studs



| Part Number | Description   | Std. Pkg. Qty. |
|-------------|---|----------------|
| P512HDK     | Installs in 1/2" knockouts in bottom of electrical box. | 50             |
| P512HDT     | Includes 3/4" stud to accommodate fixture stems.        | 50             |



## T-Bar Assembly for Lighting Support



- Accommodates fixed 24" T-bar span
- Allows for adjustable fixture position
- Fits Lightolier 5 and Calculite\* series fixtures

| Part Number | Description   | Std. Pkg. Qty. |
|-------------|---|----------------|
| P520        | T-bar assembly that fits Lightolier 5 and Calculite* series fixtures. | 25             |

\*Lightolier and Calculite are trademarks of the Phillips group brand.




## Twist-On T-Bar Hanger



- Easily twists onto T-bar to support electrical fixtures
- Accommodates T-bar 15/16" wide
- Includes 1" wing nut washer (see page L.3)




| Part Number | Description  | Static Load Rating (Lbs.) | Std. Pkg. Qty. |
|-------------|--|---------------------------|----------------|
| P4G16       | Twist-on T-bar hanger with 1/4-20 x 5/8" long threaded stud. | 50                        | 100            |



**T-Bar Scissor Clips****PPT16****P4G162**

- Support electrical fixtures or boxes to 1" wide T-bar
- Include 1" wing nut washer (see page L.3)
- Multiple stud lengths provided
- No tools required for installation

| Part Number | Description                                 | Std. Pkg. Qty. |
|-------------|---|----------------|
| PPT16       | T-bar scissor clip with 1/4-20 x 5/8" stud. | 50             |
| P4G162      | T-bar scissor clip with 1/4-20 x 2" stud.   | 50             |



## Independent Drop Wire Clips



PEC311

- Prevent sway of dedicated drop wire
- Satisfy NEC Article 300.11 code requirements (reference page N.2 for details); consult local authority
- Yellow color provides easy identification by inspectors



PEC3114Z34

| Part Number | Description  | Std. Pkg. Qty. |
|-------------|--|----------------|
| PEC311      | Independent drop wire clip.                                  | 100            |
| PEC3114Z34  | Independent drop wire clip with spring steel drop wire clip. | 100            |



**Fluorescent Light Fixture Hanger****Image 1**

- Fits most fluorescent light fixtures
- Allows quick installation with no tools required
- Provides an easy method to support an industrial class fluorescent light fixture

**Image 2**

| Part Number | Image No. | Description              | Std. Pkg. Qty. |
|-------------|-----------|--------------------------|----------------|
| PLFC        | 1         | Side mount fixture clip. | 100            |
| PLFC90      | 2         | Top mount fixture clip.  | 100            |



The Keystone Copper Cabling System provides a complete component and standards compliant cabling infrastructure solution for voice, data and video applications.

Keystone modules feature the universal “keystone” design and are compatible with a wide assortment of modular patch panels, faceplates, and surface mount boxes. When combined with complementary Panduit products, NetKey® connectivity provides solutions from the telecommunication room to the work area with proven innovation and quality.



**NetKey® Category 6A, 6 and 5e Jack Modules**

- Meet all industry performance standards for Category 6A, 6 and 5e
- Punchdown jack modules are 100% performance tested and individually serialized for future traceability
- Keystone punchdown jacks meet ANSI/TIA 568-C.2 and ISO 11801 component requirements
- Snap in and out of keystone openings for easy moves, adds and changes
- Universal label includes T568A and T568B wiring schemes



**NK6X88MIW**  
**NK688MIW**  
**NKP5E88MIW**

| Part Number                                  | Description   | Color     | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--|---|-----------|----------------|----------------|
| <b>NetKey® Category 6A UTP Jack Modules*</b> |   |           |                |                |
| NK6X88MIW                                    | Category 6A, component compliant, 8-position, 8-wire keystone punchdown jack module.                          | Off White | 1              | 50             |
| NK6X88MIW-Q                                  | Convenience pack of 25, Category 6A, component compliant, 8-position, 8-wire keystone punchdown jack modules. | Off White | 25             | 250            |

\*For standard colors other than IW (Off White), replace IW in part number with EI (Electric Ivory), IG (International Gray), WH (White), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange) or VL (Violet).

## NetKey® Category 6A, 6 and 5e Jack Modules (continued)



NK688MIW  
NKP5E88MIW

| Part Number                                  | Description  | Color     | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--|--|-----------|----------------|----------------|
| <b>NetKey® Category 6 UTP Jack Modules</b>   |  |           |                |                |
| NK688MIW                                     | Category 6, component compliant, 8-position, 8-wire, keystone punchdown jack module.                           | Off White | 1              | 50             |
| NK688MIW-Q                                   | Convenience pack of 25, Category 6, component compliant, 8-position, 8-wire, keystone punchdown jack modules.  | Off White | 25             | 250            |
| <b>NetKey® Category 5e UTP Jack Modules*</b> |  |           |                |                |
| NKP5E88MIW                                   | Category 5e, component compliant, 8-position, 8-wire, keystone punchdown jack module.                          | Off White | 1              | 50             |
| NKP5E88MIW-Q                                 | Convenience pack of 25, Category 5e, component compliant, 8-position, 8-wire, keystone punchdown jack modules. | Off White | 25             | 250            |

\*For standard colors other than IW (Off White), replace IW in part number with EI (Electric Ivory), IG (International Gray), WH (White), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange) or VL (Violet).

**NetKey® Copper UTP Patch Cords**

- Meets all industry performance standards for Category 6A, 6 and 5e
- 100% performance tested
- Available in a variety of colors and lengths for design flexibility



NK6APC^\*  
NK6PC^\*Y



NK5EPC^\*Y

| Part Number                       | Description   | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-----------------------------------|---|----------------|----------------|
| <b>Category 6A UTP Patch Cord</b> |   |                |                |
| NK6APC^*                          | Category 6A, UTP patch cord with modular plugs on each end. | 1              | 10             |
| <b>Category 6 UTP Patch Cord</b>  |   |                |                |
| NK6PC^*Y                          | Category 6, UTP patch cord with modular plugs on each end.  | 1              | 10             |
| <b>Category 6 UTP Patch Cord</b>  |   |                |                |
| NK5EPC^*Y                         | Category 5e, UTP patch cord with modular plugs on each end. | 1              | 10             |

^Available in 3, 5, 7, 10, 14 and 20-foot lengths.

\*For standard colors other than Off White, add suffix BU (Blue), RD (Red), YL (Yellow) or GR (Green) before Y in the part number. For example, the part number of a blue, Category 6, 5-foot patch cord is NK6PC5BUY.

## NetKey® Keystone Patch Panels

- Mounts to standard ANSI/TIA 19" racks
- Punchdown patch panels meet all industry performance standards for Category 6A, 6, and 5e
- Modular patch panels accept all NetKey® Modules
- Optional angled versions available for high density installations
- Optional strain relief bars assist in cable management and bend radius control
- Not compatible with Mini-Com® Jacks and Modules



NK6XPPG24Y



NKA6XPPG24Y

| Part Number                                 | Description  | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|--|----------------|----------------|
| <b>Punchdown Patch Panels - Category 6A</b> |  |                |                |
| NKA6XPPG24Y                                 | Category 6A angled punchdown patch panel, 24 port, 1 RU. | 1              | 10             |
| NKA6XPPG48Y                                 | Category 6A angled punchdown patch panel, 48 port, 2 RU. | 1              | 10             |
| NK6XPPG24Y                                  | Category 6A punchdown patch panel, 24 port, 1 RU.        | 1              | 10             |
| NK6XPPG48Y                                  | Category 6A punchdown patch panel, 48 port, 2 RU.        | 1              | 10             |

\*Punchdown patch panels are color-coded for T568A and T568B wiring schemes.

## NetKey® Keystone Patch Panels (continued)



NK6PPG12WY  
NK5EPPG12WY



NKFP12W

| Part Number                                 | Description   | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|---|----------------|----------------|
| <b>Punchdown Patch Panels - Category 6</b>  |   |                |                |
| NK6PPG12WY                                  | Category 6, 12-port punchdown patch panel. Mounts to wall with standard 89D bracket (WB89D).  | 1              | 10             |
| NKA6PPG24Y                                  | Category 6, 24-port, angled punchdown patch panel, 1 RU.                                      | 1              | 10             |
| NKA6PPG48Y                                  | Category 6, 48-port, angled punchdown patch panel, 2 RU.                                      | 1              | 10             |
| NK6PPG24Y                                   | Category 6, 24-port, punchdown patch panel, 1 RU.   | 1              | 10             |
| NK6PPG48Y                                   | Category 6, 48-port, punchdown patch panel, 2 RU.   | 1              | 10             |
| NK6PPG48Y                                   | Category 6, 48-port, punchdown patch panel, 2 RU.   | 1              | 10             |
| <b>Punchdown Patch Panels - Category 5e</b> |   |                |                |
| NK5EPPG12WY                                 | Category 5e, 12-port punchdown patch panel. Mounts to wall with standard 89D bracket (WB89D). | 1              | 10             |
| NKA5EPPG24Y                                 | Category 5e, 24-port, angled punchdown patch panel, 1 RU.                                     | 1              | 10             |
| NKA5EPPG48Y                                 | Category 5e, 48-port, angled punchdown patch panel, 2 RU.                                     | 1              | 10             |
| NK5EPPG24Y                                  | Category 5e, 24-port, punchdown patch panel, 1 RU.  | 1              | 10             |
| NK5EPPG48Y                                  | Category 5e, 48-port, punchdown patch panel, 2 RU.  | 1              | 10             |

\*Punchdown patch panels are color-coded for T568A and T568B wiring schemes.

## NetKey® Keystone Patch Panels (continued)



NKFP24Y



NKPPA48FMY



NKFP48Y

| Part Number                 | Description   | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-----------------------------|---|----------------|----------------|
| <b>Modular Patch Panels</b> |   |                |                |
| NKFP12W                     | 12-port modular patch panel with front removable faceplate. Mounts to wall with standard 89D bracket (WB89D). | 1              | 10             |
| NKFP24Y                     | 24-port modular patch panel with front removable faceplate, 1 RU.   | 1              | 10             |
| NKFP48Y                     | 48-port modular patch panel with front removable faceplate, 2 RU.   | 1              | 10             |
| NKPPA24FMY                  | 24-port flush mount angled modular patch panel, 1 RU.   | 1              | 10             |
| NKPPA48FMY                  | 48-port flush mount angled modular patch panel, 2 RU.   | 1              | 10             |
| NKPP24FMY                   | 24-port flush mount modular patch panel, 1 RU.  | 1              | 10             |
| NKPP48FMY                   | 48-port flush mount modular patch panel, 2 RU.  | 1              | 10             |
| NK6XPPG48Y                  | Category 6A punchdown patch panel, 48 port, 2 RU.   | 1              | 10             |

\*Punchdown patch panels are color-coded for T568A and T568B wiring schemes.

## NetKey® Keystone Patch Panels (continued)



WB89D



SRB19BLY



SRBM19BLY

| Part Number               | Description  | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------------------|--|----------------|----------------|
| <b>Wall Mount Bracket</b> |  |                |                |
| WB89D                     | Wall mount bracket. Ideal for use with 12-port punchdown or modular patch panels.  | 1              | 10             |
| <b>Strain Relief Bars</b> |  |                |                |
| SRB19BLY                  | Strain relief bar extends 2" from standard 19" rack for additional cable support.  | 1              | 10             |
| SRBM19BLY                 | Strain relief bar and Tak-Ty® Hook & Loop Cable Ties for additional cable support. | 1              | 10             |
| SRBS19BL-XY               | Straight strain relief bar.  | 1              | 10             |

\*Punchdown patch panels are color-coded for T568A and T568B wiring schemes.

## NetKey® Keystone Faceplates

- Mounts to standard ANSI/TIA 19" racks
- Punchdown patch panels meet all industry performance standards for Category 6A, 6, and 5e
- Modular patch panels accept all NetKey® Modules
- Optional angled versions available for high density installations
- Optional strain relief bars assist in cable management and bend radius control
- Not compatible with Mini-Com® Jacks and Modules



NK2FNIW



NK2FIWY



NK2HSFIWY



NK4VSIWY



NKF2S

| Part Number                            | Description  | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--|--|----------------|----------------|
| <b>Flush Mount Screw-On Faceplates</b> |  |                |                |
| NK <sup>^</sup> FNIW                   | Single gang, flush mount vertical faceplate.                       | 1              | 10             |
| NK <sup>**</sup> FIWY                  | Single or double gang, flush mount vertical faceplate with labels. | 1              | 10             |
| NK <sup>^</sup> HSFIWY                 | Single gang, sloped, horizontal faceplate with labels.             | 1              | 10             |
| NK4VSF                                 | Single gang, 4-port, sloped, vertical faceplate with labels.       | 1              | 10             |
| <b>Stainless Steel Faceplates</b>      |  |                |                |
| NKF <sup>^</sup> S                     | Single gang, stainless steel, vertical faceplate with labels.      | 1              | 10             |

## NetKey® Snap-On Sloped Keystone Faceplates



- Accept all Panduit® NetKey® Keystone Copper Modules and Duplex Fiber Optic Modules
- Snap into raceway channel, requires no additional mounting hardware or adapters - greatly reducing installation time
- Modular patch panels accept all NetKey® Modules
- Lowest cost for moves, adds, and changes
- Tamper resistant
- Can be used with Pan-Way® Cove, TG-70, T70, Twin-70, T-45 Raceway Systems, Fast-Snap™ Outlet Boxes, and Pan-Pole™ Aluminum Outlet Poles



NK2HSRF

NK4HSRF

NK4VSRF

| Part Number | Description   | Color‡    | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|---|-----------|----------------|----------------|
| NK2HSRFIW   | Snap-On 2-position sloped horizontal faceplate accepts any Panduit® NetKey® Module. Compatible with Panduit® NetKey® Outlet Boxes, Surface Raceway Systems, and Pan-Pole™ Outlet Poles. | Off White | 1              | 10             |
| NK4HSRFIW   | Snap-On 4-position sloped horizontal faceplate accepts any Panduit® NetKey® Module. Compatible with Panduit® NetKey® Outlet Boxes, Surface Raceway Systems, and Pan-Pole™ Outlet Poles. | Off White | 1              | 10             |
| NK4VSRFIW   | Snap-On 4-position sloped vertical faceplate accepts any Panduit® NetKey® Module. Compatible with Panduit® NetKey® Outlet Boxes, Surface Raceway Systems, and Pan-Pole™ Outlet Poles.   | Off White | 1              | 10             |

Panduit® NetKey® faceplates are NOT compatible with Panduit® Mini-Com® Modules.  
 ‡For other colors replace IW (Off White) with EI (Electric Ivory), IG (International Gray), or WH (White).

For complete labeling solutions refer to [www.panduit.com](http://www.panduit.com).

# StrongHold™ Cabling System Part Numbers

## NetKey® Snap-On Flush Universal Keystone Faceplates



- Wider module spacing to accept common manufacturers' keystone modules 0.900 inches wide or less
- Can be used with Pan-Way® Cove, TG-70, T70, Twin-70, T-45 Raceway Systems, Fast-Snap™ Outlet Boxes, and Pan-Pole™ Aluminum Outlet Poles



T70KW2IW

T70KW4IW

| Part Number | Description   | Color‡    | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|---|-----------|----------------|----------------|
| T70KW2IW    | Snap-On 2-position flush mount faceplate accepts any Panduit® NetKey® Module and most other manufacturers' keystone modules. Compatible with Panduit® Fast-Snap™ Outlet Boxes, Surface Raceway Systems, and Pan-Pole™ Outlet Poles. | Off White | 1              | 10             |
| T70KW4IW    | Snap-On 4-position flush mount faceplate accepts any Panduit® NetKey® Module and most other manufacturers' keystone modules. Compatible with Panduit® Fast-Snap™ Outlet Boxes, Surface Raceway Systems, and Pan-Pole™ Outlet Poles. | Off White | 1              | 10             |

Panduit® NetKey® faceplates are NOT compatible with Panduit® Mini-Com® Modules.

‡For other colors replace IW (Off White) in part number with EI (Electric Ivory), IG (International Gray), or WH (White).

For complete labeling solutions refer to [www.panduit.com](http://www.panduit.com).

## NetKey® Keystone Module Frame and Furniture Faceplates



NK2106MFIW

NK4106MFIW

NK2RMFIW

NK4RMFIW

NK4MFIW

| Part Number | Description  | Color‡       | Std. | Std. |
|-------------|--|--------------|------|------|
|             |  |              | Pkg. | Ctn. |
|             |  |              | Qty. | Qty. |
| NK2106MFIW  | Screw mount "106" duplex module frame. Accepts two NetKey® Modules.  | Off<br>White | 1    | 10   |
| NK4106MFIW  | Screw mount "106" duplex module frame. Accepts four NetKey® Modules.   | Off<br>White | 1    | 10   |
| NK2RMFIW    | Screw mount module frame. Accepts two NetKey® Modules. Compatible with standard NEMA outlet boxes and rectangular faceplates.  | Off<br>White | 1    | 10   |
| NK4RMFIW    | Screw mount module frame. Accepts four NetKey® Modules. Compatible with standard NEMA outlet boxes and rectangular faceplates. | Off<br>White | 1    | 10   |
| NK4MFIW     | Snap on modular furniture faceplate. Accepts four NetKey® Modules.   | Off<br>White | 1    | 10   |

‡For standard colors other than Off White, replace IW in part number with EI (Electric Ivory), WH (White), IG (International Gray) or BL (Black).

## Keystone Phone Plates



KWPY



KWP3Y

| Part Number | Description  | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--|----------------|----------------|
| KWPY        | Stainless steel wall phone plate accepts one module.                                     | 1              | 10             |
| KWP3Y       | Stainless steel wall phone plate supplied with one Category 3 keystone leadframe module. | 1              | 10             |

Wall mount faceplate kits compatible with wall mountable phones with short patch cord connections to the jack module.

## NetKey® Keystone Surface Mount Boxes

- Accepts all Panduit® NetKey® Modules
- Includes mounting screws and adhesive tap
- Compatible with Panduit® LE3, SD5, and LD10 Raceway
- Not Compatible with Mini-Com® Jacks and Modules



NK2BXIW-A



NK4BXIW-A



NK6BXIW-A



CBM-X

| Part Number | Description  | Color‡    | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--|-----------|----------------|----------------|
| NK2106MFIW  | Screw mount "106" duplex module frame. Accepts two NetKey® Modules.  | Off White | 1              | 10             |
| NK4106MFIW  | Screw mount "106" duplex module frame. Accepts four NetKey® Modules.   | Off White | 1              | 10             |
| NK2RMFIW    | Screw mount module frame. Accepts two NetKey® Modules. Compatible with standard NEMA outlet boxes and rectangular faceplates.  | Off White | 1              | 10             |
| NK4RMFIW    | Screw mount module frame. Accepts four NetKey® Modules. Compatible with standard NEMA outlet boxes and rectangular faceplates. | Off White | 1              | 10             |
| NK4MFIW     | Snap on modular furniture faceplate. Accepts four NetKey® Modules.   | Off White | 1              | 10             |

‡For surface mount box standard colors other than IW (Off White), replace suffix with EI (Electric Ivory), IG (International Gray) or WH (White).

# StrongHold™ Cabling System Part Numbers

## NetKey® Audio/Video Modules



| Part Number                   | Description  | Color‡    | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------------------------|--|-----------|----------------|----------------|
| <b>F-Type Module</b>          |  |           |                |                |
| NKFIW                         | Keystone module supplied with 75 ohm industry standard F-Type coax bulkhead coupler. | Off White | 1              | 10             |
| <b>50 Ohm BNC Coax Module</b> |  |           |                |                |
| NKBNCMIWY                     | Keystone module supplied with 50 ohm industry standard coax bulkhead coupler.        | Off White | 1              | 10             |
| <b>HDMI Coupler</b>           |  |           |                |                |
| NKHDMIW                       | Keystone module supplied with one HDMI 1.3 Type A female to female coupler module.   | Off White | 1              | 10             |
| <b>USB Coupler</b>            |  |           |                |                |
| NKUSBAAIW                     | Keystone module supplied with one USB 2.0 female A to female A coupler module.       | Off White | 1              | 10             |
| <b>Blank Module</b>           |  |           |                |                |
| NKBMIW-X                      | Blank keystone module reserves space for future use.                                 | Off White | 1              | 10             |

‡For standard colors other than IW (Off White), replace IW in part number with EI (Electric Ivory), WH (White), IG (International Gray) or BL (Black). 5-Way Binding Post Module (NKBP^IWY ) only available in EI (Electric Ivory) and WH (White).

**Termination Tool**


| Part Number          | Description  | Std.<br>Pkg.<br>Qty. | Std.<br>Ctn.<br>Qty. |
|----------------------|--|----------------------|----------------------|
| <b>F-Type Module</b> |  |                      |                      |
| NKSPB                | Base used to assist in terminating keystone punchdown modules. | 1                    | 10                   |

## Rod Hangers with Threaded Impressions



- Prevent the need for additional nuts
- Include 1/4" mounting hole in top for assemblies
- Static load capacity: 160 lbs.


| Part Number | Description                       | Std. Pkg. Qty. |
|-------------|-----------------------------------|----------------|
| P4TI        | Accommodates 1/4-20 threaded rod. | 100            |
| P6TI        | Accommodates 3/8-16 threaded rod. | 100            |



**Rod Hanger for Non-Threaded Rod**


- Friction fit prevents the need for additional hardware
- Static load capacity: 160 lbs.

| Part Number | Description            | Std. Pkg. Qty. |
|-------------|------------------------|----------------|
| P6A         | 3/8" non-threaded rod. | 100            |

**Rod Hanger for Drop Wire or Non-Threaded Rod**

- Friction fit prevents the need for additional hardware
- Two windows provide most suitable fit for multiple diameter wire/rod.
- Static load capacity: 160 lbs.

| Part Number | Description                               | Std. Pkg. Qty. |
|-------------|---|----------------|
| P708        | Rod hanger for #8 wire or 1/4" plain rod. | 100            |




## Wing Nut Washer



- Used in conjunction with products with 1/4-20 stud
- Manufactured from pre-galvanized steel
- Suitable to be installed by hand; no tools required
- Not to exceed load rating of the corresponding fastener

| Part Number | Description                       | Std. Pkg. Qty. |
|-------------|-----------------------------------|----------------|
| P4WN        | Wing nut washer fits 1/4-20 stud. | 100            |



**Brackets****PAO**

- Utilized for assemblies or a variety of other applications
- Prevents conduit bends to accommodate electrical boxes
- Static load capacity: 160 lbs.

**PAB**

| Part Number | Description   | Std. Pkg. Qty. |
|-------------|---|----------------|
| PAO         | Offset bracket with two 1/4" non-threaded holes.      | 100            |
| PAB         | Right angle bracket with two 1/4" non-threaded holes. | 100            |



**Electrical Metallic Tubing (EMT)**

| Trade Size (In.) | Nominal Inside Dia.* (In.) | Nominal Outside Dia. (In.) | Min. Weight Per 100 Ft. w/ Couplings Attached (Lbs.) | Weight of Conduit and Conductors Per 100 Ft. (Lbs.) |
|------------------|----------------------------|----------------------------|--|---|
| 0.38             | 0.49                       | 0.58                       | 23.00  | 36.60   |
| 0.50             | 0.62                       | 0.71                       | 28.50  | 50.60   |
| 0.75             | 0.82                       | 0.92                       | 43.50  | 84.30   |
| 1.00             | 1.05                       | 1.16                       | 64.00  | 130.30  |
| 1.25             | 1.38                       | 1.51                       | 95.00  | 212.30  |
| 1.50             | 1.61                       | 1.74                       | 110.00   | 269.80  |
| 2.00             | 2.07                       | 2.20                       | 140.00   | 401.80  |
| 2.50             | 2.73                       | 2.88                       | 205.00   | 579.00  |
| 3.00             | 3.36                       | 3.50                       | 250.00   | 826.30  |
| 3.50             | 3.83                       | 4.00                       | 325.00   | 1098.00   |
| 4.00             | 4.33                       | 4.50                       | 370.00   | 1364.00   |

\*Per UL table NAE.3.

**Intermediate Metal Conduit (IMC)**

| Trade Size (In.) | Nominal Inside Dia.* (In.) | Nominal Outside Dia. (In.) | Min. Weight Per 100 Ft. w/ Couplings Attached (Lbs.) | Weight of Conduit and Conductors Per 100 Ft. (Lbs.) |
|------------------|----------------------------|----------------------------|--|---|
| 0.50             | 0.68                       | 0.82                       | 60.00  | 82.10   |
| 0.75             | 0.88                       | 1.03                       | 82.00  | 122.80  |
| 1.00             | 1.12                       | 1.29                       | 116.00   | 182.30  |
| 1.25             | 1.47                       | 1.64                       | 150.00   | 267.30  |
| 1.50             | 1.70                       | 1.88                       | 182.00   | 341.80  |
| 2.00             | 2.17                       | 2.36                       | 242.00   | 503.80  |
| 2.50             | 2.60                       | 2.86                       | 401.00   | 775.00  |
| 3.00             | 3.22                       | 3.48                       | 493.00   | 1069.00   |
| 3.50             | 3.71                       | 3.97                       | 573.00   | 1346.00   |
| 4.00             | 4.21                       | 4.47                       | 638.00   | 1632.00   |

\*Per UL table NAE.3.

**Rigid Steel Conduit**

| Trade Size (In.) | Nominal Inside Dia.* (In.) | Nominal Outside Dia. (In.) | Min. Weight Per 100 Ft. w/ Couplings Attached (Lbs.) | Weight of Conduit and Conductors Per 100 Ft. (Lbs.) |
|------------------|----------------------------|----------------------------|--|---|
| 0.38             | 0.49                       | 0.68                       | 51.50  | 65.10   |
| 0.50             | 0.63                       | 0.84                       | 79.00  | 101.00  |
| 0.75             | 0.84                       | 1.05                       | 105.00   | 145.80  |
| 1.00             | 1.06                       | 1.32                       | 153.00   | 219.30  |
| 1.25             | 1.39                       | 1.66                       | 201.00   | 318.30  |
| 1.50             | 1.62                       | 1.90                       | 249.00   | 408.80  |
| 2.00             | 2.08                       | 2.38                       | 332.00   | 593.80  |
| 2.50             | 2.49                       | 2.88                       | 527.00   | 901.00  |
| 3.00             | 3.09                       | 3.50                       | 682.60   | 1259.00   |
| 3.50             | 3.57                       | 4.00                       | 831.00   | 1604.00   |
| 4.00             | 4.05                       | 4.50                       | 972.30   | 1967.00   |

\*Per UL table NAE.3.

**Rigid Aluminum Conduit**

| Trade Size (In.) | Nominal Inside Dia.* (In.) | Nominal Outside Dia. (In.) | Min. Weight Per 100 Ft. w/ Couplings Attached (Lbs.) | Weight of Conduit and Conductors Per 100 Ft. (Lbs.) |
|------------------|----------------------------|----------------------------|--|---|
| 0.50             | 0.63                       | 0.84                       | 27.40  | 49.50   |
| 0.75             | 0.84                       | 1.05                       | 36.40  | 77.20   |
| 1.00             | 1.06                       | 1.32                       | 53.00  | 119.30  |
| 1.25             | 1.39                       | 1.66                       | 69.60  | 186.90  |
| 1.50             | 1.62                       | 1.90                       | 82.20  | 242.00  |
| 2.00             | 2.08                       | 2.38                       | 115.70   | 377.50  |
| 2.50             | 2.49                       | 2.88                       | 182.50   | 556.50  |
| 3.00             | 3.09                       | 3.50                       | 238.90   | 815.20  |
| 3.50             | 3.57                       | 4.00                       | 287.70   | 1061.00   |
| 4.00             | 4.05                       | 4.50                       | 340.00   | 1334.00   |
| 5.00             | 5.07                       | 5.56                       | 465.40   | 2028.00   |
| 6.00             | 6.09                       | 6.63                       | 612.50   | 2870.00   |

## StrongHold™ Convenient Sizing Information

### Electrical Non-Metallic Tubing (ENT)

| Trade Nominal Size (In.) | Nominal Inside Dia.* (In.) | Nominal Outside Dia. (In.) | Min. Weight of Conduit Per 100 Ft. (Lbs.) | Weight of Conduit and Conductors Per 100 Ft. (Lbs.) |
|--------------------------|----------------------------|----------------------------|---|---|
| 0.50                     | 0.56                       | 0.84                       | 11.00                                     | 33.10   |
| 0.75                     | 0.76                       | 1.05                       | 14.00                                     | 54.80   |
| 1.00                     | 1.00                       | 1.32                       | 20.00                                     | 86.30   |
| 1.25                     | 1.40                       | 1.66                       | 19.00                                     | 136.30  |
| 1.50                     | 1.55                       | 1.99                       | 27.00                                     | 186.80  |
| 2.00                     | 2.03                       | 2.38                       | 32.00                                     | 261.80  |

\*Per UL table NAE.3.

### Schedule 40 PVC Plastic Pipe

| Nominal Pipe Size (In.) | Outside Dia. (In.) | Wall Thickness (In.) | Weight of Pipe Per Ft. (Lbs.) | Weight of Water Per Ft. (Lbs.) |
|-------------------------|--------------------|----------------------|-------------------------------|--------------------------------|
| 0.13                    | 0.41               | 0.07                 | 0.04                          | 0.02                           |
| 0.25                    | 0.54               | 0.09                 | 0.07                          | 0.04                           |
| 0.38                    | 0.68               | 0.09                 | 0.10                          | 0.08                           |
| 0.50                    | 0.84               | 0.11                 | 0.15                          | 0.1                            |
| 0.75                    | 1.05               | 0.11                 | 0.20                          | 0.20                           |
| 1.00                    | 1.32               | 0.13                 | 0.30                          | 0.40                           |
| 1.25                    | 1.66               | 0.14                 | 0.40                          | 0.60                           |
| 1.50                    | 1.90               | 0.15                 | 0.50                          | 0.90                           |
| 2.00                    | 2.38               | 0.15                 | 0.60                          | 1.40                           |
| 2.50                    | 2.88               | 0.20                 | 1.00                          | 2.10                           |
| 3.00                    | 3.50               | 0.22                 | 1.30                          | 3.20                           |
| 3.50                    | 4.00               | 0.23                 | 1.60                          | 4.30                           |
| 4.00                    | 4.50               | 0.24                 | 1.90                          | 5.50                           |

### All Threaded Rod (ATR)

| Nominal Size and Thread | Root Area        |                 | Design Load SF = 5 |      |
|-------------------------|------------------|-----------------|--------------------|------|
|                         | In. <sup>2</sup> | cm <sup>2</sup> | Lbs.               | kN   |
| 1/4-20                  | 0.03             | 0.17            | 240.00             | 1.07 |
| 5/16-18                 | 0.05             | 0.29            | 400.00             | 1.78 |
| 3/8-16                  | 0.07             | 0.44            | 610.00             | 2.71 |

**MC Cable**

| <b>AWG<br/>Size</b> | <b>Insulated Ground<br/>Nominal<br/>Outside Dia.<br/>(In.)</b> | <b>Bare Ground<br/>Nominal<br/>Outside Dia.<br/>(In.)</b> |
|---------------------|--|---|
| 14-2 Solid          | 0.45   | 0.43  |
| 14-3 Solid          | 0.48   | 0.44  |
| 14-4 Solid          | 0.51   | 0.49  |
| 12-2 Solid          | 0.50   | 0.47  |
| 12-3 Solid          | 0.53   | 0.50  |
| 12-4 Solid          | 0.57   | 0.56  |
| 10-2 Solid          | 0.56   | 0.52  |
| 10-3 Solid          | 0.60   | 0.55  |
| 10-4 Solid          | 0.65   | 0.62  |
| 8-2 Stranded        | 0.71   | 0.68  |
| 8-3 Stranded        | 0.77   | 0.71  |
| 8-4 Stranded        | 0.84   | 0.77  |
| 6-2 Stranded        | 0.80   | 0.76  |
| 6-3 Stranded        | 0.87   | 0.80  |
| 6-4 Stranded        | 0.95   | 0.87  |
| 4-2 Stranded        | 0.95   | 0.90  |
| 4-3 Stranded        | 1.04   | 0.95  |
| 4-4 Stranded        | 1.14   | 1.10  |
| 2-2 Stranded        | 1.08   | 1.10  |
| 2-3 Stranded        | 1.18   | 1.08  |
| 2-4 Stranded        | 1.30   | 1.18  |

## AC Cable

| Type of Armored Cable | Type of Circuit Conductors | AWG Size of Circuit Conductors | Minimum External Diameter of Armor                                 |          |  |          |   |          |  |          |      |      |
|-----------------------|----------------------------|--------------------------------|--|----------|--|----------|---|----------|--|----------|------|------|
|                       |                            |                                | Cable with Two Circuit Conductors and No Grounding Conductor (In.) |          | Cable with Three Circuit Conductors and No Grounding Conductor and Cable with Two Circuit Conductors and a Grounding Conductor (In.) |          | Cable with Four Circuit Conductors and No Grounding Conductor and Cable with Three Circuit Conductors and a Grounding Conductor (In.) |          | Cable with Four Circuit Conductors and a Grounding Conductor (In.) |          |      |      |
|                       |                            |                                | Solid  | Stranded | Solid  | Stranded | Solid   | Stranded | Solid  | Stranded |      |      |
| ACTMM                 | THHN                       | 14                             | 0.43   | —        | 0.45   | —        | 0.49  | —        | 0.52   | —        | 0.52 | —    |
|                       |                            | 12                             | 0.48   | —        | 0.49   | —        | 0.52  | —        | 0.55   | —        | 0.55 | —    |
|                       |                            | 10                             | 0.48   | —        | 0.50   | —        | 0.54  | —        | 0.59   | —        | 0.59 | —    |
|                       |                            | 8                              | 0.57   | 0.60     | 0.60   | 0.64     | 0.65  | 0.70     | 0.71   | 0.76     | 0.71 | 0.76 |
|                       |                            | 6                              | —  | 0.70     | —  | 0.74     | —   | 0.81     | —  | 0.88     | —    | 0.88 |
|                       |                            | 4                              | —  | 0.84     | —  | 0.89     | —   | 0.97     | —  | 1.07     | —    | 1.07 |
| 2                     | —                          | 0.96                           | —  | 1.01     | —  | 1.12     | —   | 1.23     | —  | 1.23     |      |      |

**Type NM – Non-Metallic Sheathed Cable**

| AWG Size | No. of Strands | Ground Wire Size | Approximate Outside Dia. (In.) | Approximate Weight Per 100 Ft. (Lbs.) |
|----------|----------------|------------------|--------------------------------|---------------------------------------|
|----------|----------------|------------------|--------------------------------|---------------------------------------|

**Without Ground Wire**

|      |       |   |             |       |
|------|-------|---|-------------|-------|
| 14-2 | Solid | — | 0.17 x 0.37 | 5.30  |
| 12-2 | Solid | — | 0.19 x 0.40 | 7.00  |
| 10-2 | Solid | — | 0.22 x 0.45 | 10.10 |
| 14-3 | Solid | — | 0.30        | 8.20  |
| 12-3 | Solid | — | 0.33        | 10.90 |
| 10-3 | Solid | — | 0.40        | 15.70 |
| 8-3  | 7     | — | 0.54        | 27.80 |
| 6-3  | 7     | — | 0.61        | 42.20 |

**With Ground Wire**

|      |       |    |             |       |
|------|-------|----|-------------|-------|
| 14-2 | Solid | 14 | 0.17 x 0.37 | 6.40  |
| 12-2 | Solid | 12 | 0.19 x 0.41 | 9.00  |
| 10-2 | Solid | 10 | 0.22 x 0.49 | 13.30 |
| 8-2  | 7     | 10 | 0.28 x 0.61 | 21.50 |
| 6-2  | 7     | 10 | 0.32 x 0.73 | 31.30 |
| 14-3 | Solid | 14 | 0.32        | 9.30  |
| 12-3 | Solid | 12 | 0.36        | 12.90 |
| 10-3 | Solid | 10 | 0.44        | 18.70 |
| 14-4 | Solid | 14 | 0.45        | 11.60 |
| 12-4 | Solid | 12 | 0.49        | 16.10 |
| 10-4 | Solid | 10 | 0.55        | 23.30 |
| 8-3  | 7     | 10 | 0.55        | 30.50 |
| 6-3  | 7     | 10 | 0.61        | 45.00 |
| 4-3  | 7     | 8  | 0.82        | 66.40 |
| 2-3  | 7     | 8  | 0.95        | 93.00 |

## StrongHold™ Convenient Sizing Information

### Type THHN – Insulated Single Conductor Building Wire

| Size<br>(AWG) | Armor Outside<br>Dia.<br>(In.) | Approximate<br>Weight<br>Per 100 Ft.<br>(Lbs.) |
|---------------|--------------------------------|--|
| 14            | 0.11                           | 1.70   |
| 12            | 0.13                           | 2.50   |
| 10            | 0.16                           | 4.00   |
| 8             | 0.22                           | 6.50   |
| 6             | 0.25                           | 9.70   |
| 4             | 0.32                           | 15.50  |
| 3             | 0.35                           | 19.10  |
| 2             | 0.38                           | 23.60  |
| 1             | 0.45                           | 30.40  |
| 1/0           | 0.49                           | 37.50  |

**Communication Cable**

| Cable Type       | Diameter (In.) |
|------------------|----------------|
| Category 6A      | 0.300          |
| Category 6A (SD) | 0.240          |
| Category 6       | 0.240          |
| Category 5e      | 0.225          |

**J-Pro™ Capacity**

| J-Pro™ Family | Category 6A (0.300") | Category 6A (SD) (0.240") | Category 6 (0.240") | Category 5e (0.225") |
|---------------|----------------------|---------------------------|---------------------|----------------------|
| JP75          | 5                    | 8                         | 8                   | 10                   |
| JP131         | 15                   | 25                        | 25                  | 29                   |
| JP2           | 30                   | 46                        | 46                  | 55                   |
| JP4           | 115                  | 180                       | 180                 | 200                  |

Note: The above cable diameters represent the nominal Panduit cable diameter per performance level. For specific cable fill information based on specific part numbers, please contact customer service.

**NFPA 70; National Electric Code; 2014 Revision**

**90.4 Enforcement.** This Code is intended to be suitable for mandatory application by governmental bodies that exercise legal jurisdiction over electrical installations, including signaling and communications systems, and for use by insurance inspectors. The authority having jurisdiction for enforcement of the Code has the responsibility for making interpretations of the rules, for deciding on the approval of equipment and materials, and for granting the special permission contemplated in a number of the rules.

By special permission, the authority having jurisdiction may waive specific requirements in this Code or permit alternative methods where it is assured that equivalent objectives can be achieved by establishing and maintaining effective safety.

This Code may require new products, constructions, or materials that may not yet be available at the time the Code is adopted. In such event, the authority having jurisdiction may permit the use of the products, constructions, or materials that comply with the most recent previous edition of this Code adopted by the jurisdiction.

**300.4 Protection Against Physical Damage.****(B) Nonmetallic-Sheathed Cables and Electrical Nonmetallic Tubing through Metal Framing Members.**

**(1) Nonmetallic-Sheathed Cable.** In both exposed and concealed locations where nonmetallic-sheathed cables pass through either factory- or field-punched, cut, or drilled slots or holes in metal members, the cable shall be protected by listed bushings or listed grommets covering all metal edges that are securely fastened in the opening prior to installation of the cable.

**(D) Cables and Raceways Parallel to Framing Members**

**and Furring Strips.** In both exposed and concealed locations, where a cable- or raceway-type wiring method is installed parallel to framing members, such as joists, rafters, or studs, or is installed parallel to furring strips, the cable or raceway shall be installed and supported so that the nearest outside surface of the cable or raceway is not less than 32mm (1 1/4 in.) from the nearest edge of the framing member or furring strips where nails or screws are likely to penetrate. Where this distance cannot be maintained, the cable or raceway shall be protected from penetration by nails or screws by a steel plate, sleeve, or equivalent at least 1.6mm (1/16 in.) thick.

*Exception No. 1: Steel plates, sleeves, or the equivalent shall not be required to protect rigid metal conduit, intermediate metal conduit, rigid nonmetallic conduit, or electrical metallic tubing.*

*Exception No. 2: For concealed work in finished buildings, or finished panels for prefabricated buildings where such supporting is impracticable, it shall be permissible to fish the cables between access points.*

*Exception No. 3: A listed and marked steel plate less than 1.6mm (1/16 in.) thick that provides equal or better protection against nail or screw penetration shall be permitted.*

**NFPA 70; National Electric Code; 2014 Revision  
(continued)****300.11 Securing and Supporting.**

**(A) Secured in Place.** Raceways, cable assemblies, boxes, cabinets, and fittings shall be securely fastened in place. Support wires that do not provide secure support shall not be permitted as the sole support. Support wires and associated fittings that provide secure support and that are installed in addition to the ceiling grid support wires shall be permitted as the sole support. Where independent support wires are used, they shall be secured at both ends. Cables and raceways shall not be supported by ceiling grids.

**(1) Fire-Rated Assemblies.** Wiring located within the cavity of a fire-rated floor-ceiling or roof-ceiling assembly shall not be secured to, or supported by, the ceiling assembly, including the ceiling support wires. An independent means of secure support shall be provided and shall be permitted to be attached to the assembly. Where independent support wires are used, they shall be distinguishable by color, tagging, or other effective means from those that are part of the fire-rated design.

*Exception: The ceiling support system shall be permitted to support wiring and equipment that have been tested as part of the fire-rated assembly.*

Informational Note: One method of determining fire rating is testing in accordance with ANSI/ASTM E119-2012a, *Method for Fire Tests of Building Construction and Materials*.

**(2) Non-Fire-Rated Assemblies.** Wiring located within the cavity of a non-fire-rated floor-ceiling or roof-ceiling assembly shall not be secured to, or supported by, the ceiling assembly, including the ceiling support wires. An independent means of secure support shall be provided and shall be permitted to be attached to the assembly. Where independent support wires are used, they shall be distinguishable by color, tagging, or other effective means.

*Exception: The ceiling support system shall be permitted to support branch-circuit wiring and associated equipment where installed in accordance with the ceiling system manufacturer's instructions.*

**300.22 Wiring in Ducts not used for Air Handling, Fabricated Ducts for Environmental Air, and other Spaces for Environmental Air (Plenums).**

The provisions of this section shall apply to the installation and uses of electrical wiring and equipment in ducts used for dust, loose stock, or vapor removal; ducts specifically fabricated for environmental air; and other spaces used for environmental air (plenums).

Informational Note: See Article 424, Part VI, for duct heaters.

**(A) Ducts for Dust, Loose Stock, or Vapor Removal.** No wiring systems of any type shall be installed in ducts used to transport dust, loose stock, or flammable vapors. No wiring system of any type shall be installed in any duct, or shaft containing only such ducts, used for vapor removal or for ventilation of commercial-type cooking equipment.

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

**(B) Ducts Specifically Fabricated for Environmental Air.**

Equipment, devices and the wiring methods specified in this section shall be permitted within such ducts only if necessary for the direct action upon, or sensing of, the contained air. Where equipment or devices are installed and illumination is necessary to facilitate maintenance and repair, enclosed gasketed-type luminaires shall be permitted.

Only wiring methods consisting of Type MI cable without an overall nonmetallic covering, Type MC cable employing a smooth or corrugated impervious metal sheath without an overall nonmetallic covering, electrical metallic tubing, flexible metallic tubing, intermediate metal conduit, or rigid metal conduit without an overall nonmetallic covering shall be installed in ducts specifically fabricated to transport environmental air. Flexible metal conduit shall be permitted, in lengths not to exceed 1.2m (4 ft.), to connect physically adjustable equipment and devices permitted to be in these fabricated ducts. The connectors used with flexible metal conduit shall effectively close any openings in the connection.

**C) Other Spaces Used for Environmental Air (Plenums).**

This section shall apply to spaces not specifically fabricated for environmental air-handling purposes but used for air-handling purposes as a plenum. This section shall not apply to habitable rooms or areas of buildings, the prime purpose of which is not air handling.

Informational Note No. 1: The space over a hung ceiling used for environmental air-handling purposes is an example of the type of other space to which this section applies.

Informational Note No. 2: The phrase “Other Spaces Used for Environmental Air (Plenum)” as used in this section correlates with the use of the term “plenum” in NFPA 90A-2012, *Standard for the Installation of Air-Conditioning and Ventilating Systems*, and other mechanical codes where the plenum is used for return air purposes, as well as some other air-handling spaces.

*Exception: This section shall not apply to the joist or stud spaces of dwelling units where the wiring passes through such spaces perpendicular to the long dimension of such spaces.*

**(1) Wiring Methods.** The wiring methods for such other space shall be limited to totally enclosed, nonventilated, insulated busway having no provisions for plug-in connections, Type MI cable without an overall nonmetallic covering, Type MC cable without an overall nonmetallic covering, Type AC cable, or other factory-assembled multiconductor control or power cable that is specifically listed for use within an air-handling space, or listed prefabricated cable assemblies of metallic manufactured wiring systems without nonmetallic sheath. Other types of cables, conductors, and raceways shall be permitted to be installed in electrical metallic tubing, flexible metallic tubing, intermediate metal conduit, rigid metal conduit without an overall nonmetallic covering, flexible metal conduit, or, where accessible, surface metal raceway or metal wireway with metal covers. Nonmetallic

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

cable ties and other nonmetallic cable accessories used to secure and support cables shall be listed as having low smoke and heat release properties.

Informational Note: One method to determine low smoke and heat release properties is that the nonmetallic cable ties and other nonmetallic cable accessories exhibit a maximum peak optical density of 0.50 or less, an average optical density of 0.15 or less, and a peak heat release rate of 100kW or less when tested in accordance with ANSI/UL 2043-2008, *Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces*.

**2) Cable Tray Systems.** The provisions in (a) or (b) shall apply to the use of metallic cable tray systems in other spaces used for environmental air (plenums), where accessible, as follows:

(a) *Metal Cable Tray Systems.* Metal cable tray systems shall be permitted to support the wiring methods in 300.22 (C)(1).

(b) *Solid Side and Bottom Metal Cable Tray Systems.*

Solid side and bottom metal cable tray systems with solid metal covers shall be permitted to enclose wiring methods and cables, not already covered in 300.22 (C)(1), in accordance with 392.10 (A) and (B).

**(3) Equipment.** Electrical equipment with a metal enclosure, or electrical equipment with a nonmetallic enclosure listed for use within an air-handling space and having adequate fire-resistant and low-smoke-producing characteristics, and associated wiring material suitable for the ambient temperature shall be permitted to be installed in such other space unless prohibited elsewhere in this Code.

Informational Note: One method of defining adequate fire-resistant and low-smoke producing characteristics for electrical equipment with a nonmetallic enclosure is in ANSI/UL 2043-2008, *Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces*.

*Exception: Integral fan systems shall be permitted where specifically identified for use within an air-handling space.*

**(D) Information Technology Equipment.** Electrical wiring in air-handling areas beneath raised floors for information technology equipment shall be permitted in accordance with Article 645.

**310.15 Ampacities for Conductors Rated 0–2000 Volts.****(B) Tables...****(3) Adjustment Factors.**

(a) *More Than Three Current-Carrying Conductors.* Where the number of current-carrying conductors in a raceway or cable exceeds three, or where single conductors or multiconductor cables are installed without maintaining spacing for a continuous length longer than 600mm (24 in.) and are not installed in raceways, the allowable ampacity of each conductor shall be reduced as shown in Table 310.15 (B)(3)(a). Each current-carrying conductor of a paralleled set of conductors shall be counted as a current-carrying conductor.

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

Where conductors of different systems, as provided in 300.3, are installed in a common raceway or cable, the adjustment factors shown in Table 310.15 (B)(3)(a) shall apply only to the number of power and lighting conductors (Articles 210, 215, 220, and 230). Informational Note No. 1: See Annex B, for adjustment factors for more than three current-carrying conductors in a raceway or cable with load diversity.

Informational Note No. 2: See 366.23 (A) for adjustment factors for conductors in sheet metal auxiliary gutters and 376.22 (B) for adjustment factors for conductors in metal wireways.

(4) Adjustment factors shall not apply to Type AC cable or to Type MC cable under the following conditions:

- a. The cables do not have an overall outer jacket.
- b. Each cable has not more than three current-carrying conductors.
- c. The conductors are 12 AWG copper.
- d. Not more than 20 current-carrying conductors are installed without maintaining spacing, are stacked, or are supported on “bridle rings.”

(5) An adjustment factor of 60 percent shall be applied to Type AC cable or Type MC cable under the following conditions:

- a. The cables do not have an overall outer jacket.
- b. The number of current carrying conductors exceeds 20.
- c. The cables are stacked or bundled longer than 600mm (24 in.) without spacing being maintained.

**314.23 Supports.** Enclosures within the scope of this article shall be supported in accordance with one or more of the provisions in 314.23 (A) through (H).

**(C) Mounting in Finished Surfaces.** An enclosure mounted in a finished surface shall be rigidly secured thereto by clamps, anchors, or fittings identified for the application.

**(D) Suspended Ceilings.** An enclosure mounted to structural or supporting elements of a suspended ceiling shall be not more than 1650cm<sup>3</sup> (100 in.<sup>3</sup>) in size and shall be securely fastened in place in accordance with either (D)(1) or (D)(2).

**(1) Framing Members.** An enclosure shall be fastened to the framing members by mechanical means such as bolts, screws, or rivets, or by the use of clips or other securing means identified for use with the type of ceiling framing member(s) and enclosure(s) employed. The framing members shall be supported in an approved manner and securely fastened to each other and to the building structure.

**2) Support Wires.** The installation shall comply with the provisions of 300.11 (A). The enclosure shall be secured, using identified methods, to ceiling support wire(s), including any additional support wire(s) installed for ceiling support. Support wire(s) used for enclosure support shall be fastened at each end so as to be taut within the ceiling cavity.

**(E) Raceway Supported Enclosure, without Devices, Luminaires, or Lampholders.** An enclosure that does not contain a device(s), other than splicing devices, or supports a luminaire(s),

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

a lampholder, or other equipment and is supported by entering raceways shall not exceed 1650cm<sup>3</sup> (100 in.<sup>3</sup>) in size. It shall have threaded entries or identified hubs. It shall be supported by two or more conduits threaded wrenchtight into the enclosure or hubs. Each conduit shall be secured within 900mm (3 ft.) of the enclosure, or within 450mm (18 in.) of the enclosure if all conduit entries are on the same side.

*Exception: The following wiring methods shall be permitted to support a conduit body of any size, including a conduit body constructed with only one conduit entry, provided that the trade size of the conduit body is not larger than the largest trade size of the conduit or tubing:*

- (1) Intermediate metal conduit, Type IMC
- (2) Rigid metal conduit, Type RMC
- (3) Rigid polyvinyl chloride conduit, Type PVC
- (4) Reinforced thermosetting resin conduit, Type RTRC
- (5) Electrical metallic tubing, Type EMT

**(F) Raceway-Supported Enclosures, with Devices, Luminaires, or Lampholders.**

An enclosure that contains a device(s), other than splicing devices, or supports a luminaire(s), a lampholder, or other equipment and is supported by entering raceways shall not exceed 1650cm<sup>3</sup> (100 in.<sup>3</sup>) in size. It shall have threaded entries or identified hubs. It shall be supported by two or more conduits threaded wrenchtight into the enclosure or hubs. Each conduit shall be secured within 450mm (18 in.) of the enclosure.

*Exception No. 1: Rigid metal or intermediate metal conduit shall be permitted to support a conduit body of any size, including a conduit body constructed with only one conduit entry, provided the trade size of the conduit body is not larger than the largest trade size of the conduit.*

*Exception No. 2: An unbroken length(s) of rigid or intermediate metal conduit shall be permitted to support a box used for luminaire or lampholder support, or to support a wiring enclosure that is an integral part of a luminaire and used in lieu of a box in accordance with 300.15 (B), where all of the following conditions are met:*

- (a) *The conduit is securely fastened at a point so that the length of conduit beyond the last point of conduit support does not exceed 900mm (3 ft.).*
- (b) *The unbroken conduit length before the last point of conduit support is 300mm (12 in.) or greater, and that portion of the conduit is securely fastened at some point not less than 300mm (12 in.) from its last point of support.*
- (c) *Where accessible to unqualified persons, the luminaire or lampholder, measured to its lowest point, is at least 2.5m (8 ft.) above grade or standing area and at least 900mm (3 ft.) measured horizontally to the 2.5m (8 ft.) elevation from windows, doors, porches, fire escapes, or similar locations.*
- (d) *A luminaire supported by a single conduit does not exceed 300mm (12 in.) in any direction from the point of conduit entry.*
- (e) *The weight supported by any single conduit does not exceed*

## NFPA 70; National Electric Code; 2014 Revision (continued)

9 kg (20 lbs.).

*(f) At the luminaire or lampholder end, the conduit(s) is threaded wrenchtight into the box, conduit body, integral wiring enclosure, or identified hubs. Where a box or conduit body is used for support, the luminaire shall be secured directly to the box or conduit body, or through a threaded conduit nipple not over 75mm (3 in.) long.*

### 314.27 Outlet Boxes.

**(A) Boxes at Luminaire or Lampholder Outlets.** Outlet boxes or fittings designed for the support of luminaires and lampholders, and installed as required by 314.23, shall be permitted to support a luminaire or lampholder.

**(2) Ceiling Outlets.** At every outlet used exclusively for lighting, the box shall be designed or installed so that a luminaire or lampholder may be attached. Boxes shall be required to support a luminaire weighing a minimum of 23 kg (50 lbs.). A luminaire that weighs more than 23 kg (50 lbs.) shall be supported independently of the outlet box, unless the outlet box is listed and marked on the interior of the box to indicate the maximum weight the box shall be permitted to support.

### 320.2 Definition.

#### Armored Cable, Type AC.

A fabricated assembly of insulated conductors in a flexible interlocked metallic armor. See 320.100.

**320.17 Through or Parallel to Framing Members.** Type AC cable shall be protected in accordance with 300.4 (A), (C), and (D) where installed through or parallel to framing members.

### 320.30 Securing and Supporting.

**(A) General.** Type AC cable shall be supported and secured by staples, cable ties, straps, hangers, or similar fittings, designed and installed so as not to damage the cable.

**(B) Securing.** Unless otherwise permitted, Type AC cable shall be secured within 300mm (12 in.) of every outlet box, junction box, cabinet, or fitting and at intervals not exceeding 1.4m (4 1/2 ft.) where installed on or across framing members.

**(C) Supporting.** Unless otherwise permitted, Type AC cable shall be supported at intervals not exceeding 1.4m (4 1/2 ft.).

Horizontal runs of Type AC cable installed in wooden or metal framing members or similar supporting means shall be considered supported where such support does not exceed 1.4m (4 1/2 ft.) intervals.

### 330.2 Definition.

Metal Clad Cable, Type MC. A factory assembly of one or more insulated circuit conductors with or without optical fiber members enclosed in an armor of interlocking metal tape, or a smooth or corrugated metallic sheath.

**NFPA 70; National Electric Code; 2014 Revision  
(continued)****330.17 Through or Parallel to Framing Members.**

Type MC cable shall be protected in accordance with 300.4 (A), (C), and (D) where installed through or parallel to framing members.

**330.30 Securing and Supporting.**

**(A) General.** Type MC cable shall be supported and secured by staples, cable ties, straps, hangers, or similar fittings or other approved means designed and installed so as not to damage the cable.

**(B) Securing.** Unless otherwise provided, cables shall be secured at intervals not exceeding 1.8m (6 ft.). Cables containing four or fewer conductors sized no larger than 10 AWG shall be secured within 300mm (12 in.) of every box, cabinet, fitting, or other cable termination. In vertical installations, listed cables with ungrounded conductors 250 kcmil and larger shall be permitted to be secured at intervals not exceeding 3m (10 ft.).

**(C) Supporting.** Unless otherwise provided, cables shall be supported at intervals not exceeding 1.8m (6 ft.). Horizontal runs of Type MC cable installed in wooden or metal framing members or similar supporting means shall be considered supported and secured where such support does not exceed 1.8m (6 ft.) intervals.

**334.2 Definitions.**

**Nonmetallic-Sheathed Cable.** A factory assembly of two or more insulated conductors enclosed within an overall nonmetallic jacket.

**334.17 Through or Parallel to Framing Members.**

Types NM, NMC, or NMS cable shall be protected in accordance with 300.4 where installed through or parallel to framing members. Grommets used as required in 300.4 (B)(1) shall remain in place and be listed for the purpose of cable protection.

**334.30 Securing and Supporting.**

Nonmetallic-sheathed cable shall be supported and secured by staples, cable ties, straps, hangers, or similar fittings designed and installed so as not to damage the cable, at intervals not exceeding 1.4m (4 1/2 ft.) and within 300mm (12 in.) of every outlet box, junction box, cabinet, or fitting. Flat cables shall not be stapled on edge.

Sections of cable protected from physical damage by raceway shall not be required to be secured within the raceway.

**(A) Horizontal Runs Through Holes and Notches.**

In other than vertical runs, cables installed in accordance with 300.4 shall be considered to be supported and secured where such support does not exceed 1.4m (4 1/2 ft.) intervals and the nonmetallic-sheathed cable is securely fastened in place by an approved means within 300mm (12 in.) of each box, cabinet, conduit body, or other nonmetallic-sheathed cable termination.

Informational Note: See 314.17 (C) for support where nonmetallic boxes are used.

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

**342.30 Securing and Supporting.**

IMC shall be installed as a complete system in accordance with 300.18 and shall be securely fastened in place and supported in accordance with 342.30 (A) and (B).

**(A) Securely Fastened.** IMC shall be secured in accordance with one of the following:

- (1) IMC shall be securely fastened within 900mm (3 ft.) of each outlet box, junction box, device box, cabinet, conduit body, or other conduit termination.
- (2) Where structural members do not readily permit fastening within 900mm (3 ft.), fastening shall be permitted to be increased to a distance of 1.5m (5 ft.).
- (3) Where approved, conduit shall not be required to be securely fastened within 900mm (3 ft.) of the service head for above-the-roof termination of a mast.

**(B) Supports.** IMC shall be supported in accordance with one of the following:

- (1) Conduit shall be supported at intervals not exceeding 3m (10 ft.).
- (2) The distance between supports for straight runs of conduit shall be permitted in accordance with Table 344.30 (B)(2), provided the conduit is made up with threaded couplings and such supports prevent transmission of stresses to termination where conduit is deflected between supports.

**344.30 Securing and Supporting.** RMC shall be installed as a complete system in accordance with 300.18 and shall be securely fastened in place and supported in accordance with 344.30 (A) and (B).

**(A) Securely Fastened.** RRMC shall be secured in accordance with one of the following:

- (1) RMC shall be securely fastened within 900mm (3 ft.) of each outlet box, junction box, device box, cabinet, conduit body, or other conduit termination.
- (2) Fastening shall be permitted to be increased to a distance of 1.5m (5 ft.) where structural members do not readily permit fastening within 900mm (3 ft.).
- (3) Where approved, conduit shall not be required to be securely fastened within 900mm (3 ft.) of the service head for above-the-roof termination of a mast.

**(B) Supports.** RMC shall be supported in accordance with one of the following:

- (1) Conduit shall be supported at intervals not exceeding 3m (10 ft.).
- (2) The distance between supports for straight runs of conduit shall be permitted in accordance with Table 344.30 (B)(2), provided the conduit is made up with threaded couplings and such supports prevent transmission of stresses to termination where conduit is deflected between supports.

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

**348.30 Securing and Supporting.** FMC shall be securely fastened in place and supported in accordance with 348.30 (A) and (B).

**(A) Securely Fastened.** FMC shall be securely fastened in place by an approved means within 300mm (12 in.) of each box, cabinet, conduit body, or other conduit termination and shall be supported and secured at intervals not to exceed 1.4m (4 1/2 ft.) .

**(B) Supports.** Horizontal runs of FMC supported by openings through framing members at intervals not greater than 1.4m (4 1/2 ft.) and securely fastened within 300mm (12 in.) of termination points shall be permitted.

**358.30 Securing and Supporting.** EMT shall be installed as a complete system in accordance with 300.18 and shall be securely fastened in place and supported in accordance with 358.30 (A) and (B).

**(A) Securely Fastened.** EMT shall be securely fastened in place at least every 3m (10 ft.). In addition, each EMT run between termination points shall be securely fastened within 900mm (3 ft.) of each outlet box, junction box, device box, cabinet, conduit body, or other tubing termination.

*Exception No. 1: Fastening of unbroken lengths shall be permitted to be increased to a distance of 1.5m (5 ft.) where structural members do not readily permit fastening within 900mm (3 ft.).*

*Exception No. 2: For concealed work in finished buildings or prefinished wall panels where such securing is impracticable, unbroken lengths (without coupling) of EMT shall be permitted to be fished.*

**(B) Supports.** Horizontal runs of EMT supported by openings through framing members at intervals not greater than 3m (10 ft.) and securely fastened within 900mm (3 ft.) of termination points shall be permitted.

**362.2 Definition.**

**Electrical Nonmetallic Tubing (ENT).** A nonmetallic, pliable, corrugated raceway of circular cross section with integral or associated couplings, connectors, and fittings for the installation of electrical conductors. ENT is composed of a material that is resistant to moisture and chemical atmospheres and is flame retardant. A pliable raceway is a raceway that can be bent by hand with a reasonable force but without other assistance.

**362.30 Securing and Supporting.** ENT shall be installed as a complete system in accordance with 300.18 and shall be securely fastened in place and supported in accordance with 362.30 (A) and (B).

**(A) Securely Fastened.** ENT shall be securely fastened at intervals not exceeding 900mm (3 ft.). In addition, ENT shall be securely fastened in place within 900mm (3 ft.) of each outlet box, device box, junction box, cabinet, or fitting where it terminates.

*Exception No. 1: Lengths not exceeding a distance of 1.8m (6 ft.)*

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

*from a luminaire terminal connection for tap connections to lighting luminaires shall be permitted without being secured.*

*Exception No. 2: Lengths not exceeding 1.8m (6 ft.) from the last point where the raceway is securely fastened for connections within an accessible ceiling to luminaire(s) or other equipment.*

*Exception No. 3: For concealed work in finished buildings or prefinished wall panels where such securing is impracticable, unbroken lengths (without coupling) of ENT shall be permitted to be fished.*

**410.36 Means of Support.**

**(A) Outlet Boxes.** Outlet boxes or fittings installed as required by 314.23 and complying with the provisions of 314.27 (A)(1) and 314.27 (A)(2) shall be permitted to support luminaires.

**(B) Suspended Ceilings.** Framing members of suspended ceiling systems used to support luminaires shall be securely fastened to each other and shall be securely attached to the building structure at appropriate intervals. Luminaires shall be securely fastened to the ceiling framing member by mechanical means such as bolts, screws, or rivets. Listed clips identified for use with the type of ceiling framing member(s) and luminaire(s) shall also be permitted.

**410.154 Fastening.** Lighting track shall be securely mounted so that each fastening is suitable for supporting the maximum weight of luminaires that can be installed. Unless identified for supports at greater intervals, a single section 1.2m (4 ft.) or shorter in length shall have two supports, and, where installed in a continuous row, each individual section of not more than 1.2m (4 ft.) in length shall have one additional support.

**590.4 General.**

**(J) Support.** Cable assemblies and flexible cords and cables shall be supported in place at intervals that ensure that they will be protected from physical damage. Support shall be in the form of staples, cable ties, straps, or similar type fittings installed so as not to cause damage. Cable assemblies and flexible cords and cables installed as branch circuits or feeders shall not be installed on the floor or on the ground. Extension cords shall not be required to comply with 590.4(J). Vegetation shall not be used for support of overhead spans of branch circuits or feeders.

*Exception: For holiday lighting in accordance with 590.3 (B), where the conductors or cables are arranged with strain relief devices, tension take-up devices, or other approved means to avoid damage from the movement of the live vegetation, trees shall be permitted to be used for support of overhead spans of branch-circuit conductors or cables.*

**604.7 Installation.** Manufactured wiring systems shall be secured and supported in accordance with the applicable cable or conduit article for the cable or conduit type employed.

**NFPA 70; National Electric Code; 2014 Revision  
(continued)**

**725.24 Mechanical Execution of Work.** Class 1, Class 2, and Class 3 circuits shall be installed in a neat and workmanlike manner. Cables and conductors installed exposed on the surface of ceilings and sidewalls shall be supported by the building structure in such a manner that the cable will not be damaged by normal building use. Such cables shall be supported by straps, staples, hangers, cable ties, or similar fittings designed and installed so as not to damage the cable. The installation shall also comply with 300.4 (D).

**760.24 Mechanical Execution of Work.**

**(A) General.** Fire alarm circuits shall be installed in a neat workmanlike manner. Cables and conductors installed exposed on the surface of ceilings and sidewalls shall be supported by the building structure in such a manner that the cable will not be damaged by normal building use. Such cables shall be supported by straps, staples, cable ties, hangers, or similar fittings designed and installed so as not to damage the cable. The installation shall also comply with 300.4 (D).

**800.24 Mechanical Execution of Work.**

Communications circuits and equipment shall be installed in a neat and workmanlike manner. Cables installed exposed on the surface of ceilings and sidewalls shall be supported by the building structure in such a manner that the cable will not be damaged by normal building use. Such cables shall be secured by hardware, including straps, staples, cable ties, hangers, or similar fittings designed and installed so as not to damage the cable. The installation shall also conform to 300.4 (D) and 300.11. Nonmetallic cable ties and other nonmetallic cable accessories used to secure and support cables in other spaces used for environmental air (plenums) shall be listed as having low smoke and heat release properties.

Informational Note No. 1: Accepted industry practices are described in ANSI/NECA/BICSI 568-2006, *Standard for Installing Commercial Building Telecommunications Cabling*; ANSI/TIA/EIA-568-B.1-2004 — Part 1, General Requirements Commercial Building Telecommunications Cabling Standard; ANSI/TIA-569-B-2004, *Commercial Building Standard for Telecommunications Pathways and Spaces*; ANSI/TIA-570-B, *Residential Telecommunications Infrastructure*, and other ANSI-approved installation standards.

Informational Note No. 2: See 4.3.11.2.6.5 and 4.3.11.5.5.6 of NFPA 90A-2012, *Standard for the Installation of Air-Conditioning and Ventilating Systems*, for discrete combustible components installed in accordance with 300.22 (C).

## **Telecommunications Pathways and Spaces; ANSI/TIA-569-C; Revision May, 2012**

### **6.7.6 Low-Voltage Mounting Bracket**

A low-voltage mounting bracket is similar to a plaster ring and may be used in place of an outlet box where permitted by code.

### **9.3.2 Telecommunications Pathway Separation From Lighting**

Balanced twisted-pair cabling should be separated from fluorescent lamps and associated fixtures by a minimum of 125mm (5 in.).

#### **9.4.2.1 Planning**

The design shall provide a suitable means and method for supporting cables. Cable shall not be laid directly on the ceiling tile or rails.

#### **9.4.2.2 Clearance**

A minimum of 75mm (3 in.) clear vertical space shall be available above the ceiling tiles for the cabling and pathway.

#### **9.5.4.3 Cable Management**

Providing physical management for cabling placed within the access floor system lessens the chance of damage or reduced performance over the cable's life cycle. A method of physical management for major runs of cabling shall be provided. Management systems such as raceways, cable tray, and non-continuous cable supports may be used.

### **9.7 Non-Continuous Support**

Non-continuous supports shall be located at intervals not to exceed 1.5m (5 ft.). Non-continuous supports shall be selected to accommodate the immediate and anticipated quantity, weight, and performance requirements of cables.

Steel, masonry, independent rods, independent support wires or other structural parts of the building shall be used for cable support attachment points up to the total weight for which the fastener is approved. Rods or wires that are currently employed for other functions (e.g., suspended ceiling grid support) shall not be utilized as attachment points for non-continuous supports.

**NOTE:** A weight of 1 kg (2.2 lbs.) (or 0.7 kg/m [0.5 lb./ft.] with spacing of support wire/rod at 1.5m [5 ft.]) is equivalent to a bundle of sixteen 4-pair 24 AWG UTP cables, including fasteners.

#### **9.8.3.1 Conduit Termination**

Conduits shall be reamed to eliminate sharp edges. Metallic conduit shall be terminated with an insulated bushing.

**BICSI TDMM, 12th Edition; 2009 Revision****Page 5-1: Introduction**

Horizontal pathways include:

- Continuous pathways (e.g., conduit cable tray and cable matting) used for containment of telecommunications cabling
- Non-continuous pathways (e.g., the space between open-top cable supports [J-hooks]) through which cable is placed between physical support or containment components

**Pages 5-39-5-41: Pathway and Cable Support**

Every ceiling distribution system must provide proper support for cables from the telecommunications space to the work areas served. Ceiling panels, support channels (T-bars), and suspended ceiling support wires are not proper cabling supports.

Ceiling conduits, raceways, cable trays, and cabling must be suspended from or attached to the structural ceiling or walls with hardware or other installation aids specifically designed to support their weight.

The pathways must:

- Have adequate support to withstand cable pulling
- Be installed with at least 75mm (3 in.) of clear vertical space above the ceiling tiles and support channels (T-bars) to ensure accessibility

Horizontal pathways or cable should not rest directly on or be supported by:

- Ceiling panels
- Support channels (T-bars)
- Ceiling support wires
- Other components of the suspended ceiling

It is important to provide sufficient space between the suspended ceiling structure and the telecommunications pathways/cables to install, maneuver, and store ceiling tiles during service. When sufficient space is available above the pathway, up to 150mm (6 in.) should be provided between the suspended ceiling and the cabling pathways.

Where building codes permit telecommunications cable to be placed in suspended ceiling spaces without conduit, ceiling zone distribution pathways may consist of:

- Cable trays
- Open-top supports (e.g., J-hooks)

**NOTE:** J-hooks should be located 1.5m (5 ft.) apart at the maximum to adequately support and distribute the cable's weight. The manufacturer's specifications for cable loading should be followed.

## **BICSI TDMM, 12th Edition; 2009 Revision (continued)**

Cable support devices that have narrow surface areas to support the cable laying horizontally inside or on top may have a detrimental effect on the transmissions performance of higher performance cabling systems.

If possible, a wider surface area should be chosen to support the cable as a precaution against potential problems. Another precaution would be to reduce the distance between the support devices.

Suspended cables must be installed with at least 75mm (3 in.) of clear vertical space above the ceiling tiles and support channels (T-bars).

For large quantities of cables (50 or more) that converge at the ER, TR, and other areas, provide cable trays or other special supports that are specifically designed to support the required cable weight and volume.

### **Page 5-57: Telecommunications Outlets/Connectors**

Telecommunications outlet/connector boxes must be used in fire-rated wall installations and must be firestopped appropriately. Low-voltage mounting brackets (e.g., also known as mud ring, plaster ring, square-drawn cover, and box eliminator) may be used where the wall is not fire rated, and are typically used for work associated with MACs.

Telecommunications outlet/connector boxes installed in dry wall, plaster, or concrete block wall are available in an array of shapes and sizes. The size of each telecommunications outlet/connector box must be of a size that is adequate to accommodate the type and density of cabling to be installed.

Telecommunications outlet/connector boxes should not be placed back to back to serve adjacent rooms. This can compromise the effectiveness of the wall as a sound barrier and as a firestop.

## **J-Pro™ Cable Support System – Frequently Asked Questions**

### **Question:**

**What references define how and where J-hooks are used?**

### **Answer:**

J-hooks are a horizontal pathway promoted in the BICSI® TDM manual as a means to route cable bundles (see catalog pages N.14 – N.15). Furthermore, the TIA-569-C standard promotes non-continuous supports as a means to route cable bundles as well (see catalog page N.13). According to Underwriters Laboratories Inc. (UL), the portion of the NEC® that defines the requirements of this cabling pathway is found in Section 300.22 of the NEC (see catalog pages N.2 – N.4).

### **Question:**

**What is the difference between plenum space and air handling space?**

### **Answer:**

The industry-wide confusion regarding the definition of a *plenum space* versus an *air handling space* is very common as the area above a drop ceiling is mistakenly referred to as a plenum.

Simply stated, the NEC defines a plenum area as, “a compartment or chamber to which one or more air ducts are connected and that forms part of the air distribution system.” They also reference, “the space over a hung ceiling used for environmental air-handling purposes,” and, “areas beneath raised floors for information technology equipment,” as air handling space (NEC pg. 70-144 and 70-145; see catalog pages N.2 – N.4). Often, the NEC definition of these terms differs from their common use in the industry – however, UL is compatible with the NEC terms and definitions. Therefore, the space above a hung (or drop/suspended) ceiling utilized as an air return to the HVAC unit is considered an air handling space. Additionally, the area below a raised floor used to supply conditioned air is also considered an air handling space.

### **Question:**

**Is the J-Pro™ Cable Support System approved by UL for use in air handling spaces in the United States?**

### **Answer:**

Yes, during the development of the J-Pro™ Cable Support System, Panduit coordinated testing and evaluation with UL for approval of the following statement on all the J-Pro™ Cable Support System products to reduce confusion in the market: “Suitable for use in air handling spaces in accordance with Section 300.22 (C) and (D) of the NEC....” This statement is engraved and is visible on the side or bottom of each part. According to this phrase, the J-Pro™ Cable

### **J-Pro™ Cable Support System –** *Frequently Asked Questions (continued)*

Support System can be utilized in the area above the suspended ceiling (300.22 [C]) or below a raised floor (300.22 [D]), but it cannot be utilized within ductwork (300.22 [A] and [B]) (see catalog pages N.2 – N.4). Approval to use J-Pro™ Cable Support System above the suspended ceiling and below the raised floor was a result of completing/passing testing of the J-Pro™ Cable Support System per the UL standard UL2043, Fire Test for Visible Heat and Smoke Release for Discrete Products and their Accessories Installed in Air-Handling Spaces. This test requires product to meet certain criteria for heat release and smoke density and the values measured correlate back to the maximum flame spread and smoke index of the mechanical code. The basic standard used to investigate products in this category is ANSI/UL 1565, “Positioning Devices”. The J-Pro™ Cable Support System product line is UL listed within UL file number E136577.

#### **Question:**

**Is the J-Pro™ Cable Support System approved by Underwriters’ Laboratories of Canada (ULC) for use in air handling spaces?**

#### **Answer:**

Yes, for applications within Canada, the J-Pro™ Cable Support System was tested and evaluated by ULC for approval of the following statement, “In accordance with CAN/ULC S102.2 in single units or pairs. 4-foot minimum spacing, FSR = 0, SDC = 35.” This statement is engraved and visible on the side or bottom of each part. According to this phrase, the J-Pro™ Cable Support System is approved for the same air handling spaces as defined by the NEC Article 300.22 (C) and (D) (above the suspended ceiling or below a raised floor) and meets the S102.2 (Standard Method of Test for Surface Burning Characteristics of Floor Coverings, and Miscellaneous Material and Assemblies) requirements as stated in the National Building Code of Canada. The J-Pro™ Cable Support System product line is ULC listed within ULC file number R21673.

**UL****File E136577****Volume 2, Section 2****Page 1****ULC****File R21673****Volume 1****Description**

Product Covered:

USL, CNL – Positioning Devices – Model JP2, JP4, JP75, JP131

General Description:

USL, CNL – Indicates that the products have been evaluated in accordance with the requirements in UL 1565 and CAN/CSA C22.2 No. 18.5-02 Standards for Positioning Devices.

These devices are a J-Pro™ J-hook, and are used in applications where zone conduit, cable trays, or ladder racks are not available or applicable.

The J-Pro™ J-hook contains a family of parts. This system has several other brackets and/or components, manufactured from a high-carbon plated steel, riveted to the JP2, JP4, JP75, and JP131 for a variety of applications.

**Table 1**

| Family of Part Numbers | J-Pro™ Cable Support System Description |
|------------------------|---|
| JP2                    | J-Pro™ J-hook                           |

**Ratings:**

These devices are rated 60°C, for indoor use, suitable for use in air handling spaces in accordance with Sec. 300.22 (C) and (D) of the National Electrical Code in single units or pairs, and 30 lb. maximum load rating.

**Table 3**

| Family of Part Numbers | J-Pro™ Cable Support System Description |
|------------------------|---|
| JP4                    | J-Pro™ J-hook                           |

**Ratings:**

These devices are rated 60°C, for indoor use, suitable for use in air handling spaces in accordance with Sec. 300.22 (C) and (D) of the National Electrical Code, and 100 lb. maximum load rating in single unit configuration only.

**Table 4**

| Family of Part Numbers | J-Pro™ Cable Support System Description |
|------------------------|---|
| JP75                   | J-Pro™ J-hook                           |

**Ratings:**

These devices are rated 60°C, for indoor use, suitable for use in air handling spaces in accordance with Sec. 300.22 (C) and (D) of the National Electrical Code in single units or pairs, and 15 lb. maximum load rating.

**Table 5**

| Family of Part Numbers | J-Pro™ Cable Support System Description |
|------------------------|---|
| JP131                  | J-Pro™ J-hook                           |

**Ratings:**

These devices are rated 60°C, for indoor use, suitable for use in air handling spaces in accordance with Sec. 300.22 (C) and (D) of the National Electrical Code in single units or pairs, and 20 lb. maximum load rating.

**Scope for UL 1565 Positioning Devices**

**1 Scope**

**1:1** This standard applies to those metallic and nonmetallic devices used for positioning – which may include bundling and securing – or to a limited extent supporting cable, wire, conduit, or tubing of a wiring system in electrical installations, to reduce the risk of fire, electric shock, or injury to persons. This standard applies to, but is not limited to, cable ties, cable tie mounting blocks, cable clamps, cable and conduit clips, and non-raceway ducts.

**Standard Method of Test for Surface Burning Characteristics of Floor Coverings, and Miscellaneous Material and Assemblies, CAN/ULC-S102.2-M88.**

On April 1, 2004, fire tests were conducted at our ULC Toronto facilities in accordance with the Standard CAN/ULC-S102.2-03, Standard Method of Test for Surface Burning Characteristics of Floor Covering, and Miscellaneous Materials and Assemblies.



Listed in accordance with CAN/ULC-S102.2

|               |                  |
|---------------|------------------|
| Flame         | Smoke            |
| <u>Spread</u> | <u>Developed</u> |
| 0             | 35               |

15KH = The control number assigned by ULC.

0 = The Flame Spread rating assigned by ULC.

35 = The Smoke Developed value assigned by ULC.

The J-Pro™ (JP2 and JP2W) products may be marked with the Flame Spread and Smoke Developed values as shown above when mounted as single units or pairs with a minimum spacing of 1220mm.

These parts may be fastened to metal clips to produce the following part number (with the same mounting requirements above), which may also bear the ULC mark:

|               |               |               |              |
|---------------|---------------|---------------|--------------|
| JP2HBC25RB-   | JP75DW-       | JP75SBC87-    | JP131CP-     |
| JP4HBC50RB-   | JP2HBC50RB-   | JP75SBC50-    | JP75SBC87RB- |
| JP131UF100-   | JP4HBC75RB-   | JP2HBC75RB-   | JP75SBC50RB- |
| JP131CMB-     | JP131WP2B-    | JP4ZP-        | JP2HBC25RB-  |
| JP2ZP-        | JP75HBC25RB-  | JP131DW-      | JP131SBC87-  |
| JP4CP-        | JP2HBC50RB-   | JP2CP-        | JP75HBC50RB- |
| JP131SBC50-   | JP131SBC87RB- | JP4UF100-     | JP2HBC75RB-  |
| JP2UF100-     | JP75HBC75RB-  | JP131SBC50RB- | JP4W-        |
| JP4WP2B-      | JP2CMB-       | JP2WP2B-      | JP75ZP-      |
| JP131HBC25RB- | JP4CMB-       | JP4SBC87-     | JP2DW-       |
| JP2SBC87-     | JP75CP-       | JP131HBC50RB- | JP4SBC50-    |
| JP4SBC87RB-   | JP2SBC50-     | JP2SBC87RB-   | JP75UF100-   |
| JP131HBC75RB- | JP4SBC50RB-   | JP2SBC50RB-   | JP75CMB-     |
| JP75WP2B-     | JP131ZP-      | JP4HBC25RB-   |              |

**StrongHold™ Part Number Index****B**

|                      |      |
|----------------------|------|
| BR-1.5-PAF .....     | H.15 |
| BR-1.5-SN .....      | H.15 |
| BR-1.5-TW .....      | H.15 |
| BR-1.25-1/4-20 ..... | H.15 |
| BR-1.25-10-24 .....  | H.15 |
| BR-1.25-14WS .....   | H.15 |
| BR-2.0-1/4-20 .....  | H.15 |
| BR-2.0-10-24 .....   | H.15 |
| BR-2.0-14W .....     | H.15 |
| BR-2.0-PAF .....     | H.15 |
| BR-2.0-SN .....      | H.15 |
| BR-2.0-TW .....      | H.15 |
| BR-4.0-1/4-20 .....  | H.15 |
| BR-.50-10-24 .....   | H.15 |
| BR-.75-10-24 .....   | H.15 |

**C**

|                  |      |
|------------------|------|
| CSM-1.25-C ..... | G.17 |
|------------------|------|

**E**

|                     |     |
|---------------------|-----|
| E10-6FB-Q .....     | C.3 |
| E10-6LFB-Q .....    | C.4 |
| E10-6RB-Q .....     | C.3 |
| E10-8FB-Q .....     | C.3 |
| E10-8LFB-Q .....    | C.4 |
| E10-8RB-Q .....     | C.3 |
| E10-10FB-Q .....    | C.3 |
| E10-10LFB-Q .....   | C.4 |
| E10-10RB-Q .....    | C.3 |
| E10-14FB-Q .....    | C.3 |
| E10-14LFB-Q .....   | C.4 |
| E10-14RB-Q .....    | C.3 |
| E14-4RB-Q* .....    | C.3 |
| E14-6FB-Q* .....    | C.3 |
| E14-6LFB-Q* .....   | C.4 |
| E14-6RB-Q* .....    | C.3 |
| E14-8FB-Q* .....    | C.3 |
| E14-8LFB-Q* .....   | C.4 |
| E14-8RB-Q* .....    | C.3 |
| E14-10FB-Q* .....   | C.3 |
| E14-10LFB-Q* .....  | C.4 |
| E14-10RB-Q* .....   | C.3 |
| E18-4RB-Q* .....    | C.3 |
| E18-6FB-Q* .....    | C.3 |
| E18-6LFB-Q* .....   | C.4 |
| E18-6RB-Q* .....    | C.3 |
| E18-8FB-Q* .....    | C.3 |
| E18-8LFB-Q* .....   | C.4 |
| E18-8RB-Q* .....    | C.3 |
| E18-10FB-Q* .....   | C.3 |
| E18-10LFB-Q* .....  | C.4 |
| E18-10RB-Q* .....   | C.3 |
| EBNF14-4FIB-Q ..... | C.6 |
| EBNF14-4FIM-Q ..... | C.6 |
| EBNF18-4FIB-Q ..... | C.6 |
| EBNF18-4FIM-Q ..... | C.6 |

|                        |     |
|------------------------|-----|
| EBV14-4B-Q .....       | C.6 |
| EBV14-4MB-Q .....      | C.6 |
| EBV18-4B-Q .....       | C.6 |
| EBV18-4MB-Q .....      | C.6 |
| ED10-250M-Q .....      | C.5 |
| ED14-188-Q* .....      | C.5 |
| ED14-250MB-Q* .....    | C.5 |
| ED14-250-Q* .....      | C.5 |
| ED18-188-Q* .....      | C.5 |
| ED18-250MB-Q* .....    | C.5 |
| ED18-250-Q* .....      | C.5 |
| EDNF10-250FI-Q .....   | C.4 |
| EDNF14-187MB-Q .....   | C.5 |
| EDNF14-188FIB-Q* ..... | C.4 |
| EDNF14-250FIB-Q* ..... | C.4 |
| EDNF18-187MB-Q .....   | C.5 |
| EDNF18-188FIB-Q* ..... | C.4 |
| EDNF18-250FIB-Q* ..... | C.4 |
| EDNF10250FIMB-Q .....  | C.5 |
| EDNF14250FIMB-Q* ..... | C.5 |
| EDNF18250FIMB-Q* ..... | C.5 |
| EDV10-11MB-Q .....     | C.8 |
| EDV10-250FIB-Q .....   | C.5 |
| EDV10-250M-Q .....     | C.5 |
| EDV10-250P-Q .....     | C.6 |
| EDV10-250-Q .....      | C.5 |
| EDV14-87MB-Q .....     | C.8 |
| EDV14-187MB-Q .....    | C.5 |
| EDV14-188B-Q* .....    | C.5 |
| EDV14-250B-Q* .....    | C.5 |
| EDV14-250FIB-Q .....   | C.5 |
| EDV14-250M-Q* .....    | C.5 |
| EDV14-250P-Q* .....    | C.6 |
| EDV18-87MB-Q .....     | C.8 |
| EDV18-187MB-Q .....    | C.5 |
| EDV18-188B-Q* .....    | C.5 |
| EDV18-250B-Q* .....    | C.5 |
| EDV18-250FIB-Q .....   | C.5 |
| EDV18-250M-Q* .....    | C.5 |
| EDV18-250P-Q* .....    | C.6 |
| EJN218-216-Q* .....    | C.8 |
| EJN314-412-Q .....     | C.8 |
| EJN418-212-Q .....     | C.8 |
| EQSP10-18D-Q .....     | C.7 |
| EQSP10-Q .....         | C.7 |
| EQSP14D-Q* .....       | C.7 |
| EQSP14-Q .....         | C.7 |
| EQSP18D-Q .....        | C.7 |
| EQSP18-Q .....         | C.7 |
| ES10B-Q .....          | C.6 |
| ES14B-Q* .....         | C.6 |
| ES18B-Q* .....         | C.6 |
| ESV6-ESV8-Q .....      | C.7 |
| ESV8-ESV10-Q .....     | C.7 |
| ESV8-ESV14-Q .....     | C.7 |
| ESV10BX-Q .....        | C.6 |
| ESV10-ESV14-Q .....    | C.7 |
| ESV10-ESV18-Q .....    | C.7 |
| ESV14BX-Q* .....       | C.6 |

**StrongHold™ Part Number Index**

|                     |     |                     |      |
|---------------------|-----|---------------------|------|
| ESV14-ESV18-Q ..... | C.7 | EV18-P47B-Q* .....  | C.7  |
| ESV18BX-Q* .....    | C.6 |                     |      |
| EV6-10R-Q .....     | C.2 | <b>H</b>            |      |
| EV6-12R-Q .....     | C.2 | HLSP1.5S-X0 .....   | H.12 |
| EV6-38R-Q .....     | C.2 | HLSP1.5S-X12 .....  | H.12 |
| EV6-56R-Q .....     | C.2 | HLSP3S-X0 .....     | H.12 |
| EV8-8R-Q .....      | C.2 | HLSP3S-X12 .....    | H.12 |
| EV8-12R-Q .....     | C.2 | HLSP5S-X0 .....     | H.12 |
| EV8-14R-Q .....     | C.2 | HLSP5S-X12 .....    | H.12 |
| EV8-38R-Q .....     | C.2 | HLTP2I-X0 .....     | H.12 |
| EV8-56R-Q .....     | C.2 | HLTP2I-X12 .....    | H.12 |
| EV10-6FB-Q .....    | C.3 | HLTP3I-X0 .....     | H.12 |
| EV10-6LFB-Q .....   | C.4 | HLTP3I-X12 .....    | H.12 |
| EV10-6RB-Q .....    | C.2 | HLTT1.5S-Q20 .....  | H.13 |
| EV10-8FB-Q .....    | C.3 |                     |      |
| EV10-8FNB-Q .....   | C.4 | <b>I</b>            |      |
| EV10-8LFB-Q .....   | C.4 | IMLT25S-C .....     | B.4  |
| EV10-8RB-Q .....    | C.2 | IMLT25S-C6L .....   | B.4  |
| EV10-10FB-Q .....   | C.3 | IMLT51H-L .....     | B.6  |
| EV10-10FNB-Q .....  | C.4 | IMLT51H-L6L .....   | B.6  |
| EV10-10LFB-Q .....  | C.4 | IMLT51S-C .....     | B.4  |
| EV10-10RB-Q .....   | C.2 | IMLT51S-C6L .....   | B.4  |
| EV10-12RB-Q .....   | C.2 | IMLT69H-L .....     | B.6  |
| EV10-14FB-Q .....   | C.3 | IMLT69H-L6L .....   | B.6  |
| EV10-14LFB-Q .....  | C.4 | IMLT69S-C .....     | B.4  |
| EV10-14RB-Q .....   | C.2 | IMLT69S-C6L .....   | B.4  |
| EV10-38RB-Q .....   | C.2 | IMLT102H-L .....    | B.6  |
| EV10-56FB-Q .....   | C.3 | IMLT102H-L6L .....  | B.6  |
| EV10-56RB-Q .....   | C.2 | IMLT102S-C .....    | B.4  |
| EV10-P55-Q .....    | C.7 | IMLT102S-C6L .....  | B.4  |
| EV14-6FB-Q* .....   | C.3 | IMLT152H-L .....    | B.6  |
| EV14-6FNB-Q .....   | C.4 | IMLT152H-L6L .....  | B.6  |
| EV14-6LFB-Q* .....  | C.4 | IMLT152S-C .....    | B.4  |
| EV14-6RB-Q* .....   | C.2 | IMLT152S-C6L .....  | B.4  |
| EV14-8FB-Q* .....   | C.3 | IMLT203H-L .....    | B.6  |
| EV14-8FNB-Q .....   | C.4 | IMLT203H-L6L .....  | B.6  |
| EV14-8LFB-Q* .....  | C.4 | IMLT203S-C .....    | B.4  |
| EV14-8RB-Q* .....   | C.2 | IMLT203S-C6L .....  | B.4  |
| EV14-10FB-Q* .....  | C.3 | IMLT254H-L .....    | B.6  |
| EV14-10FNB-Q .....  | C.4 | IMLT254H-L6L .....  | B.6  |
| EV14-10LFB-Q* ..... | C.4 | IMLT254S-C .....    | B.4  |
| EV14-10RB-Q* .....  | C.2 | IMLT254S-C6L .....  | B.4  |
| EV14-14FB-Q .....   | C.3 | IMLT304H-Q .....    | B.6  |
| EV14-14RB-Q* .....  | C.2 | IMLT304H-Q6L .....  | B.6  |
| EV14-38RB-Q .....   | C.2 | IMLT304S-Q .....    | B.4  |
| EV14-56RB-Q* .....  | C.2 | IMLT304S-Q6L .....  | B.4  |
| EV14-P47B-Q* .....  | C.7 | IMLT355H-Q .....    | B.6  |
| EV18-6FB-Q* .....   | C.3 | IMLT355H-Q6L .....  | B.6  |
| EV18-6LFB-Q* .....  | C.4 | IMLT355S-Q .....    | B.4  |
| EV18-6RB-Q* .....   | C.2 | IMLT355S-Q6L .....  | B.4  |
| EV18-8FB-Q* .....   | C.3 | IMLT380S-Q .....    | B.4  |
| EV18-8LFB-Q* .....  | C.4 | IMLT380S-Q6L .....  | B.4  |
| EV18-8RB-Q* .....   | C.2 | IMLTFC38H-C6L ..... | B.7  |
| EV18-10FB-Q* .....  | C.3 | IMLTFC38S-C6L ..... | B.7  |
| EV18-10LFB-Q* ..... | C.4 | IMLTFC51H-L6L ..... | B.7  |
| EV18-10RB-Q* .....  | C.2 | IMLTFC51S-C6L ..... | B.7  |
| EV18-14FB-Q .....   | C.3 | IMLTFC64H-C6L ..... | B.7  |
| EV18-14RB-Q* .....  | C.2 | IMLTFC64S-C6L ..... | B.7  |
| EV18-56RB-Q* .....  | C.2 |                     |      |

## StrongHold™ Part Number Index (continued)

|                       |      |                       |            |
|-----------------------|------|-----------------------|------------|
| IMLTFC69H-L6L .....   | B.7  | JP4W-X20 .....        | H.5        |
| IMLTFC86H-C6L .....   | B.7  | JP4ZP-X20 .....       | H.5        |
| IMLTFC86S-C6L .....   | B.7  | JP75CMB-L20 .....     | H.2        |
| IMLTFC102H-L6L .....  | B.7  | JP75CP-L20 .....      | H.2        |
| IMLTFC102S-C6L .....  | B.7  | JP75DW-L20 .....      | H.2        |
| IMLTFC137H-C6L .....  | B.7  | JP75HBC25RB-L20 ..... | H.2        |
| IMLTFC137S-C6L .....  | B.7  | JP75HBC50RB-L20 ..... | H.2        |
| IMLTFC152H-L6L .....  | B.7  | JP75HBC75RB-L20 ..... | H.2        |
| IMLTFC152S-C6L .....  | B.7  | JP75SBC50-L20 .....   | H.2        |
| IMLTFC203H-L6L .....  | B.7  | JP75SBC50RB-L20 ..... | H.2        |
| IMLTFC203S-C6L .....  | B.7  | JP75SBC87-L20 .....   | H.2        |
| IMS9.5T35-QR6L .....  | B.10 | JP75SBC87RB-L20 ..... | H.2        |
| IMS12T35-QR6L .....   | B.10 | JP75UF100-L20 .....   | H.2        |
| IMS16T35-QR6L .....   | B.10 | JP75W-L20 .....       | H.2        |
| IMSB E19-C6L .....    | B.10 | JP75WP2B-L20 .....    | H.2        |
| IMSBL9.5-C6L .....    | B.10 | JP75ZP-L20 .....      | H.2        |
| IMSBL12-C6L .....     | B.10 | JP131CMB-L20 .....    | H.3        |
| IMSBL16-C6L .....     | B.10 | JP131CP-L20 .....     | H.3        |
| IMSP9.5T35-QR6L ..... | B.10 | JP131DW-L20 .....     | H.3        |
| IMSP12T35-QR6L .....  | B.10 | JP131HBC25RBL20 ..... | H.3        |
| IMSP16T35-QR6L .....  | B.10 | JP131HBC50RBL20 ..... | H.3        |
|                       |      | JP131HBC75RBL20 ..... | H.3        |
|                       |      | JP131SBC50-L20 .....  | H.3        |
|                       |      | JP131SBC50RBL20 ..... | H.3        |
|                       |      | JP131SBC87-L20 .....  | H.3        |
|                       |      | JP131SBC87RBL20 ..... | H.3        |
|                       |      | JP131UF100-L20 .....  | H.3        |
|                       |      | JP131W-L20 .....      | H.3        |
|                       |      | JP131WP2B-L20 .....   | H.3        |
|                       |      | JP131ZP-L20 .....     | H.3        |
| <b>J</b>              |      | <b>K</b>              |            |
| JMCB-X .....          | H.11 | KWP3Y .....           | K.13       |
| JMCMB25-1-X .....     | H.11 | KWPY .....            | K.13       |
| JMCMB25-3-X .....     | H.11 |                       |            |
| JMDWB-1-X .....       | H.11 | <b>L</b>              |            |
| JMDWB-3-X .....       | H.11 | LV-S-1G .....         | I.1        |
| JMJH2W-X20 .....      | H.11 | LV-S-2G .....         | I.1        |
| JMJH2-X20 .....       | H.11 | LV-W-1G .....         | I.1        |
| JMSBCB87-1-X .....    | H.11 | LV-W-2G .....         | I.1        |
| JMSBCB87-3-X .....    | H.11 |                       |            |
| JMTRB38-1-X .....     | H.11 | <b>M</b>              |            |
| JMTRB38-3-X .....     | H.11 | MC/AC .....           | G.13       |
| JP2CMB-L20 .....      | H.4  | MSG-1.3-C .....       | G.16, G.18 |
| JP2CP-L20 .....       | H.4  | MSGV-1.3-C .....      | G.16       |
| JP2DW-L20 .....       | H.4  | MSPT-1.3 .....        | G.18       |
| JP2HBC25RB-L20 .....  | H.4  |                       |            |
| JP2HBC50RB-L20 .....  | H.4  | <b>N</b>              |            |
| JP2HBC75RB-L20 .....  | H.4  | NK2HSRFIW .....       | K.10       |
| JP2SBC50-L20 .....    | H.4  | NK2RMFIW .....        | K.12, K.14 |
| JP2SBC50RB-L20 .....  | H.4  | NK4HSRFIW .....       | K.10       |
| JP2SBC87-L20 .....    | H.4  | NK4MFIW .....         | K.12, K.14 |
| JP2SBC87RB-L20 .....  | H.4  | NK4RMFIW .....        | K.12, K.14 |
| JP2UF100-L20 .....    | H.4  | NK4VSF .....          | K.9        |
| JP2W-L20 .....        | H.4  | NK4VSRFIW .....       | K.10       |
| JP2WP2B-L20 .....     | H.4  | NK5EPPG12WY .....     | K.6        |
| JP2ZP-L20 .....       | H.4  |                       |            |
| JP4CMB-X20 .....      | H.5  |                       |            |
| JP4CP-X20 .....       | H.5  |                       |            |
| JP4HBC25RB-X20 .....  | H.5  |                       |            |
| JP4HBC50RB-X20 .....  | H.5  |                       |            |
| JP4HBC75RB-X20 .....  | H.5  |                       |            |
| JP4SBC50RB-X20 .....  | H.5  |                       |            |
| JP4SBC50-X20 .....    | H.5  |                       |            |
| JP4SBC87RB-X20 .....  | H.5  |                       |            |
| JP4SBC87-X20 .....    | H.5  |                       |            |
| JP4UF100-X20 .....    | H.5  |                       |            |
| JP4WP2B-X20 .....     | H.5  |                       |            |

## StrongHold™ Part Number Index (continued)

|              |                 |           |           |
|--------------|-----------------|-----------|-----------|
| NK5EPPG24Y   | .....K.6        | P6A       | .....L.2  |
| NK5EPPG48Y   | .....K.6        | P6A24     | .....E.7  |
| NK6PPG12WY   | .....K.6        | P6A58     | .....E.7  |
| NK6PPG24Y    | .....K.6        | P6A912    | .....E.7  |
| NK6PPG48Y    | .....K.6        | P6AO      | .....F.1  |
| NK6X88MIW    | .....K.2, K.4   | P6M       | .....D.1  |
| NK6X88MIW-Q  | .....K.2        | P6M24     | .....D.4  |
| NK6XPPG24Y   | .....K.5        | P6M24SM   | .....D.5  |
| NK6XPPG48Y   | .....K.5, K.7   | P6M58     | .....D.4  |
| NK688MIW     | .....K.3        | P6M58SM   | .....D.5  |
| NK688MIW-Q   | .....K.3        | P6M912    | .....D.4  |
| NK2106MFIW   | .....K.12, K.14 | P6M912SM  | .....D.5  |
| NK4106MFIW   | .....K.12, K.14 | P6MATA    | .....J.2  |
| NKA5EPPG24Y  | .....K.6        | P6MATS    | .....J.3  |
| NKA5EPPG48Y  | .....K.6        | P6MB18    | .....D.13 |
| NKA6PPG24Y   | .....K.6        | P6MB18A   | .....D.13 |
| NKA6PPG48Y   | .....K.6        | P6MF      | .....G.5  |
| NKA6XPPG24Y  | .....K.5        | P6TA24    | .....E.7  |
| NKA6XPPG48Y  | .....K.5        | P6TA58    | .....E.7  |
| NKBMIW-X     | .....K.15       | P6TB      | .....F.1  |
| NKBNCMIWY    | .....K.15       | P6TI      | .....L.1  |
| NKFIW        | .....K.15       | P6TIB     | .....F.1  |
| NK**FIWY     | .....K.9        | P6TIO     | .....F.1  |
| NK*FNIW      | .....K.9        | P6TO      | .....F.1  |
| NKFP12W      | .....K.7        | P6Z34     | .....D.9  |
| NKFP24Y      | .....K.7        | P8P       | .....D.2  |
| NKFP48Y      | .....K.7        | P8P8P     | .....D.10 |
| NKFA^S       | .....K.9        | P8P12P    | .....D.10 |
| NKHDMIIW     | .....K.15       | P8P16P    | .....D.10 |
| NK^HSFIWY    | .....K.9        | P8P24     | .....D.6  |
| NKP5E88MIW   | .....K.3        | P8P24SM   | .....D.6  |
| NKP5E88MIW-Q | .....K.3        | P8P58     | .....D.6  |
| NKPP24FMY    | .....K.7        | P8P58SM   | .....D.6  |
| NKPP48FMY    | .....K.7        | P8P912    | .....D.6  |
| NKPPA24FMY   | .....K.7        | P8P912SM  | .....D.6  |
| NKPPA48FMY   | .....K.7        | P8PATA    | .....J.2  |
| NKSPB        | .....K.16       | P8PATS    | .....J.3  |
| NKUSBAAIW    | .....K.15       | P8PF      | .....G.5  |
| Non-metallic | .....G.13       | P12P      | .....D.2  |
| <b>P</b>     |                 | P12P12P   | .....D.10 |
| P4ACS        | .....J.4        | P12P16P   | .....D.10 |
| P4G16        | .....J.7        | P12P24    | .....D.6  |
| P4G162       | .....J.8        | P12P24SM  | .....D.6  |
| P4H24        | .....E.2        | P12P58    | .....D.6  |
| P4H58        | .....E.2        | P12P58SM  | .....D.6  |
| P4H912       | .....E.2        | P12P912   | .....D.6  |
| P4TI         | .....L.1        | P12P912SM | .....D.6  |
| P4TI24       | .....E.7        | P12PATA   | .....J.2  |
| P4TI912      | .....E.7        | P12PATS   | .....J.3  |
| P4TIB        | .....F.1        | P12PF     | .....G.5  |
| P4TIO        | .....F.1        | P16M      | .....D.1  |
| P4WN         | .....L.3        | P16M24    | .....D.4  |
| P4Z34*       | .....D.9        | P16M24SM  | .....D.5  |
| P4Z348P      | .....D.9        | P16M58    | .....D.4  |
| P4Z3412P     | .....D.9        | P16M58SM  | .....D.5  |
| P4Z3416M     | .....D.9        | P16M912   | .....D.4  |
| P4Z3416P     | .....D.9        | P16M912SM | .....D.5  |
| P4Z34812M    | .....D.9        | P16MATA   | .....J.2  |
|              |                 | P16MATS   | .....J.3  |

## StrongHold™ Part Number Index (continued)

|            |      |              |      |
|------------|------|--------------|------|
| P16MB18    | D.14 | P812MB18     | D.13 |
| P16MB18A   | D.14 | P812MB18A    | D.13 |
| P16MF      | G.5  | P812MB18S    | D.14 |
| P16P       | D.1  | P812MB1824   | D.13 |
| P16P16P    | D.10 | P812MF       | G.5  |
| P16P24     | D.6  | P1224TI      | E.12 |
| P16P24SM   | D.6  | P1226T       | E.12 |
| P16P58     | D.6  | P1226TI      | E.12 |
| P16P58SM   | D.6  | P1236M       | E.11 |
| P16P912    | D.6  | P1238P       | E.11 |
| P16P912SM  | D.6  | P1616M       | D.10 |
| P16PATA    | J.2  | P1620M       | D.10 |
| P16PATS    | J.3  | P1624M       | D.10 |
| P16PF      | G.5  | P3508P       | G.6  |
| P20M       | D.1  | P12312P      | E.11 |
| P20M24     | D.4  | P12316M      | E.11 |
| P20M24SM   | D.5  | P12316P      | E.11 |
| P20M58     | D.4  | P12320M      | E.11 |
| P20M58SM   | D.5  | P16812M      | D.10 |
| P20M912    | D.4  | P35012P      | G.6  |
| P20M912SM  | D.5  | P35016M      | G.6  |
| P24M       | D.1  | P35016P      | G.6  |
| P24M24     | D.4  | P123812M     | E.11 |
| P24M24SM   | D.5  | P350812M     | G.6  |
| P24M58     | D.4  | PAF14        | E.8  |
| P24M58SM   | D.5  | PAO          | L.4  |
| P24M912    | D.4  | PAOL8P       | D.19 |
| P24M912SM  | D.5  | PAOL12P      | D.19 |
| P32M       | D.1  | PAOL16P      | D.19 |
| P32M24     | D.4  | PATA4I       | J.1  |
| P32M24SM   | D.5  | PBC          | E.1  |
| P32M58     | D.4  | PBC*         | E.1  |
| P32M58SM   | D.5  | PBC8P        | E.5  |
| P32M912    | D.4  | PBC8PSM      | E.5  |
| P32M912SM  | D.5  | PBC12P       | E.5  |
| P122       | E.9  | PBC12PSM     | E.5  |
| P123       | E.9  | PBC16M       | E.5  |
| P166M      | D.10 | PBC16MSM     | E.5  |
| P304B2     | G.2  | PBC16P       | E.5  |
| P350       | G.6  | PBC16PSM     | E.5  |
| P449       | D.16 | PBC20M       | E.5  |
| P512       | J.5  | PBC20MSM     | E.5  |
| P512A      | J.5  | PBC24M       | E.5  |
| P512HDK    | J.6  | PBC24MSM     | E.5  |
| P512HDT    | J.6  | PBC32M       | E.5  |
| P515A      | J.1  | PBC32MSM     | E.5  |
| P520       | J.7  | PBC200       | E.1  |
| P766       | G.7  | PBC200CD1B   | E.6  |
| P766PMD    | G.7  | PBC200CD2.5B | E.6  |
| P812M      | D.1  | PBC200CD2B   | E.6  |
| P812M4I**  | D.1  | PBC200CD3B   | E.6  |
| P812M24    | D.4  | PBC200CD4B   | E.6  |
| P812M24SM  | D.5  | PBC200CD5B   | E.6  |
| P812M58    | D.4  | PBC400       | E.1  |
| P812M58SM  | D.5  | PBC812M      | E.5  |
| P812M912   | D.4  | PBC812MSM    | E.5  |
| P812M912SM | D.5  | PCATHBA      | H.6  |
| P812MATA   | J.2  | PCD0B        | D.3  |
| P812MATS   | J.3  | PCD1B        | D.3  |

**StrongHold™ Part Number Index**

|                  |      |                |      |
|------------------|------|----------------|------|
| PCD2.5B .....    | D.3  | PMSS24 .....   | F.2  |
| PCD2B .....      | D.3  | PMSS58 .....   | F.2  |
| PCD3B .....      | D.3  | PMSS912 .....  | F.2  |
| PCD4B .....      | D.3  | PPT16 .....    | J.8  |
| PCD5B .....      | D.3  | PRBS16 .....   | G.9  |
| PCD6B .....      | D.3  | PRBS24 .....   | G.9  |
| PCD7B .....      | D.3  | PRLC .....     | I.2  |
| PCD8B .....      | D.3  | PSC2A .....    | D.15 |
| PCD9B .....      | D.3  | PSC2B .....    | D.15 |
| PCJ6 .....       | G.13 | PSC2C .....    | D.15 |
| PCNB8P .....     | D.18 | PSC2D .....    | D.15 |
| PCNB12P .....    | D.18 | PSC2E .....    | D.15 |
| PCNB812M .....   | D.18 | PSC2F .....    | D.15 |
| PCS16 .....      | G.2  | PSC2G .....    | D.15 |
| PCS812D .....    | G.2  | PSC4A .....    | D.15 |
| PDS12A .....     | I.2  | PSC4B .....    | D.15 |
| PEC311 .....     | J.9  | PSC4C .....    | D.15 |
| PEC3114Z34 ..... | J.9  | PSC4D .....    | D.15 |
| PFB6M .....      | G.15 | PSC4E .....    | D.15 |
| PFB8P .....      | G.15 | PSC4F .....    | D.15 |
| PFB12P .....     | G.15 | PSC4G .....    | D.15 |
| PFB812M .....    | G.15 | PSC8A .....    | D.15 |
| PFBS18 .....     | G.11 | PSC8B .....    | D.15 |
| PFMBS18 .....    | G.12 | PSC8C .....    | D.15 |
| PFXC20 .....     | G.14 | PSC8D .....    | D.15 |
| PH4 .....        | G.1  | PSC8E .....    | D.15 |
| PH6 .....        | G.1  | PSC8F .....    | D.15 |
| PH23 .....       | G.1  | PSC8G .....    | D.15 |
| PIDS .....       | J.4  | PSCH6B .....   | D.11 |
| PJ1A4 .....      | G.7  | PSCH8B .....   | D.11 |
| PJ1A6 .....      | G.7  | PSCH12B .....  | D.11 |
| PJ1A25 .....     | G.7  | PSCH16B .....  | D.11 |
| PJ1A35 .....     | G.7  | PSCH20B .....  | D.11 |
| PK8 .....        | D.8  | PSCH24B .....  | D.11 |
| PK12 .....       | D.8  | PSCH32B .....  | D.11 |
| PK16* .....      | D.8  | PSCH40B .....  | D.11 |
| PK20* .....      | D.8  | PSCH48B .....  | D.11 |
| PKX* .....       | D.7  | PSCH56B .....  | D.11 |
| PM24 .....       | E.3  | PSCH64B .....  | D.11 |
| PM24S .....      | E.3  | PSCH72B .....  | D.11 |
| PM58 .....       | E.3  | PSGB16A .....  | G.10 |
| PM58S .....      | E.3  | PSGB24A .....  | G.10 |
| PM912 .....      | E.3  | PSK85I .....   | D.12 |
| PM912S .....     | E.3  | PSK125I .....  | D.12 |
| PMCS50 .....     | D.17 | PSK165I .....  | D.12 |
| PMCS100 .....    | D.17 | PSK205 .....   | D.12 |
| PMCS101 .....    | D.17 | PSK245I .....  | D.12 |
| PMEB1 .....      | G.1  | PSK325I .....  | D.12 |
| PMF250 .....     | G.4  | PSK405I .....  | D.12 |
| PMF375 .....     | G.4  | PSK485I .....  | D.12 |
| PMF500 .....     | G.4  | PSK565I .....  | D.12 |
| PMF625 .....     | G.4  | PSK645I .....  | D.12 |
| PMF750 .....     | G.4  | PTSGB16 .....  | G.8  |
| PMFO .....       | G.3  | PTSGB24 .....  | G.8  |
| PMFS .....       | G.3  | PVF14 .....    | E.8  |
| PMSF .....       | G.3  | PVF144TI ..... | E.10 |
| PMSR24 .....     | F.2  | PVF146T .....  | E.10 |
| PMSR58 .....     | F.2  | PVF146TI ..... | E.10 |
| PMSR912 .....    | F.2  | PWMX3 .....    | D.16 |

## StrongHold™ Part Number Index (continued)

|                   |      |                       |      |
|-------------------|------|-----------------------|------|
| PWMX6 .....       | D.16 | S17-50-C .....        | A.4  |
| <b>S</b>          |      | S17-50-C0 .....       | A.4  |
| S4-18-C .....     | A.4  | S17-50-M .....        | A.4  |
| S4-18-C0 .....    | A.4  | S17-50-M0 .....       | A.4  |
| S4-18-M .....     | A.4  | S18-120-L .....       | A.6  |
| S4-18-M0 .....    | A.4  | S18-120-L0 .....      | A.6  |
| S5-50-C .....     | A.4  | S21-50-C .....        | A.4  |
| S5-50-C0 .....    | A.4  | S21-50-C0 .....       | A.4  |
| S5-50-M .....     | A.4  | S21-50-M .....        | A.4  |
| S5-50-M0 .....    | A.4  | S21-50-M0 .....       | A.4  |
| S6-18-C .....     | A.4  | S21-120-C .....       | A.6  |
| S6-18-C0 .....    | A.4  | S21-120-C0 .....      | A.6  |
| S6-18-M .....     | A.4  | S21-120-L .....       | A.6  |
| S6-18-M0 .....    | A.4  | S21-120-L0 .....      | A.6  |
| S6-40-C .....     | A.4  | S24-120-L .....       | A.6  |
| S6-40-C0 .....    | A.4  | S24-120-L0 .....      | A.6  |
| S6-40-M .....     | A.4  | S24-120-Q .....       | A.6  |
| S6-40-M0 .....    | A.4  | S24-120-Q0 .....      | A.6  |
| S6-50-C .....     | A.4  | S30-120-L .....       | A.6  |
| S6-50-C0 .....    | A.4  | S30-120-L0 .....      | A.6  |
| S6-50-M .....     | A.4  | S30-120-X .....       | A.6  |
| S6-50-M0 .....    | A.4  | S30-120-X0 .....      | A.6  |
| S7-50-C .....     | A.4  | SC8-50-S10-C .....    | A.6  |
| S7-50-C0 .....    | A.4  | SC8-50-S10-C0 .....   | A.6  |
| S7-50-M .....     | A.4  | SC15-120-S25-L .....  | A.6  |
| S7-50-M0 .....    | A.4  | SC15-120-S25-L0 ..... | A.6  |
| S8-18-C .....     | A.4  | SRB19BLY .....        | K.8  |
| S8-18-C0 .....    | A.4  | SRBM19BLY .....       | K.8  |
| S8-18-M .....     | A.4  | SRBS19BL-XY .....     | K.8  |
| S8-18-M0 .....    | A.4  | <b>T</b>              |      |
| S8-40-C .....     | A.4  | T70KW2IW .....        | K.11 |
| S8-40-C0 .....    | A.4  | T70KW4IW .....        | K.11 |
| S8-40-M .....     | A.4  | TTS-35R3-0 .....      | H.13 |
| S8-40-M0 .....    | A.4  | TTS-35RX0 .....       | H.13 |
| S8-50-C .....     | A.4  | <b>W</b>              |      |
| S8-50-C0 .....    | A.4  | WB89D .....           | K.8  |
| S8-50-M .....     | A.4  |                       |      |
| S8-50-M0 .....    | A.4  |                       |      |
| S10-50-C .....    | A.4  |                       |      |
| S10-50-C0 .....   | A.4  |                       |      |
| S12-40-C .....    | A.4  |                       |      |
| S12-40-C0 .....   | A.4  |                       |      |
| S12-40-M .....    | A.4  |                       |      |
| S12-40-M0 .....   | A.4  |                       |      |
| S12-50-C .....    | A.4  |                       |      |
| S12-50-C0 .....   | A.4  |                       |      |
| S12-50-M .....    | A.4  |                       |      |
| S12-50-M0 .....   | A.4  |                       |      |
| S14-120-L .....   | A.6  |                       |      |
| S14-120-L0 .....  | A.6  |                       |      |
| S14-120-TL .....  | A.6  |                       |      |
| S14-120-TL0 ..... | A.6  |                       |      |
| S15-40-C .....    | A.4  |                       |      |
| S15-40-C0 .....   | A.4  |                       |      |
| S15-50-C .....    | A.4  |                       |      |
| S15-50-C0 .....   | A.4  |                       |      |
| S15-50-M .....    | A.4  |                       |      |
| S15-50-M0 .....   | A.4  |                       |      |

**Panduit is a global leader in  
cabling and communication products,  
delivering end-to-end solutions in support of  
demanding electrical and networking requirements.**

## **Panduit Catalogs**

### **Industrial Electrical Solutions**

ELCB31--SA-ENG

- **Bundle**  
Cable Ties  
Cable Accessories  
Stainless Steel Cable Ties  
and Accessories
- **Route/Protect**  
Wiring Duct  
Abrasion Protection  
Cable Management
- **Terminate**  
Terminals  
Power Connectors  
Grounding Connectors
- **Identification and  
Safety Solutions**  
Labeling Systems  
Labels  
Pre-Printed and  
Write-On Markers  
Permanent Identification  
Lockout/Tagout and  
Safety Solutions
- **Keystone Cabling  
Systems**

### **Network and Infrastructure Solutions**

NCCB93--SA-ENG

- Copper Systems
- Fiber Systems
- Faceplates, Outlet Frames  
and Surface Mount  
Boxes
- Keystone Cabling Systems
- Zone Cabling
- Cable Routing Systems
- Surface Raceway
- Cabinets, Racks and  
Cable Management  
Systems
- Power Management
- Grounding and Bonding
- Identification Products
- Cable Management  
Accessories

## Contractor Grade Solutions for Electrical and Networking Installations

Panduit is committed to providing our contractor partners a comprehensive portfolio of products, programs, and services to help increase job site productivity, improve back-office operations, and accelerate cash flow. Our collaborative approach addresses the greatest business challenges for the contractor community, and provides a competitive advantage in your market space.

### Solutions

- Whether the solution is for electrical or networking systems, Panduit offers a unique understanding of the complexities of infrastructure construction
- We continually offer new application systems focused on meeting the ever-changing installation and maintenance needs of our customers

### Programs\*

- The Panduit Business Partner Program offers a variety of benefits designed to help increase effectiveness, address the business needs of customers, and grow overall profitability
- A prescriptive planning and inventory management program that provides visibility throughout all levels of the supply chain to increase service levels and keep projects on schedule

### Services

- The Mobile Access Guide immediately provides information required to keep your project moving when working on-site or from most any remote location
- Extensive website with product specifications, installation guides, part drawings and more, to make your job easier
- World-class customer service and product availability keep your projects on time and within budget

# STRONGHOLD™

CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

\*For complete program details, go to [www.panduit.com](http://www.panduit.com) or contact Customer Service at 800.777.3300. All programs and benefits subject to terms and conditions.

# STRONGHOLD™


CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

# STRONGHOLD™

CONTRACTOR GRADE PRODUCTS  
FOR GENERAL PURPOSE APPLICATIONS

## Panduit Corporate World Headquarters

Tinley Park, Illinois 60487

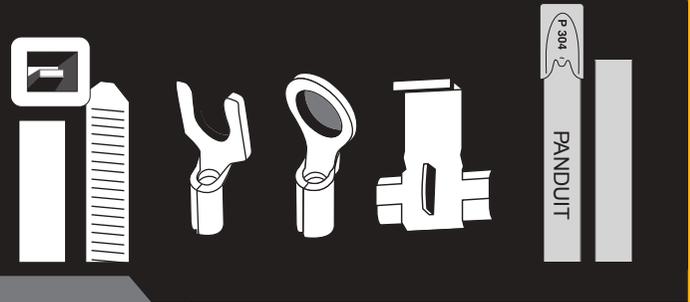

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300

## Commercial Construction Pocket Guide

© 2018 Panduit Corp.  
ALL RIGHTS RESERVED  
Printed in the U.S.A.  
Catalog Number **CMCB02-SA-ENG**  
Replaces WACB24-SA-ENG  
9/2018

# PANDUIT®

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Electrical Enclosures](#) category:*

*Click to view products by [Panduit](#) manufacturer:*

Other Similar products are found below :

[120-401](#) [120-905](#) [120-909](#) [120-403](#) [130-004](#) [MR-25L+](#) [30-8739](#) [PIP-11774SCREW](#) [30-9715](#) [30-9777-BU](#) [105-905](#) [110-901](#) [A16N12BLP](#)  
[110-406](#) [110-401](#) [110-403](#) [110-404](#) [120-405](#) [34861601](#) [106-009](#) [106-505](#) [105-405](#) [111-005](#) [127-909](#) [106-502](#) [130-503](#) [127-401](#) [127-455](#)  
[9511150](#) [9511017](#) [9820011](#) [NSYTDB5PL](#) [137-455](#) [130-001](#) [105-904](#) [120-404](#) [137-005](#) [130-505](#) [127-406](#) [AB 1,5.0](#) [AB2.0](#) [ABM.0](#)  
[73345601](#) [F-MP](#) [M-MP](#) [PAT 12040](#) [2461000](#) [79541301](#) [19001001](#) [19001101](#)