TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology



specifications

Category 6A/Class E_A , UTP patch cords shall be constructed of 23 AWG stranded copper cable with an enhanced performance modular plug on each end. Copper conductors in patch cable shall be twisted in pairs and separated by a quadrant separator. All four pairs shall be surrounded by matrix tape and a flame retardant jacket. The patent pending matrix tape shall suppress alien crosstalk and allow 10 Gb/s transmission. Patch cord cable shall be offered in multiple colors and lengths for design flexibility with a strain relief boot on each modular plug. All patch cords shall be compatible with both T568A and T568B wiring schemes.



technical information

Category 6A/Class E _A channel performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class E_A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A $^{\rm m}$ 10Gig $^{\rm m}$ UTP Copper Cabling System	
Headroom warranty:	Guaranteed performance beyond the standard when a complete end-to-end TX6A™ 10Gig™ UTP Copper Cabling System is installed by a Panduit certified installer	
Cable diameter:	0.275 in. (7.0mm) nominal	
FCC and ANSI compliance:	Meets all applicable ANSI/TIA-968-A requirements; contacts plated with 50 microinches of gold for superior performance	
RoHS compliance:	Compliant	
IEC compliance:	Meets IEC 60603-7	
PoE compliance:	Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications	
UL rated:	UL 1863 approved	
Flammability rating:	CM	

key features and benefits

100% performance tested	Confidence that each patch cord delivers specified performance	
MaTriX Technology (PATENT) PENDING	Provides superior suppression of both PSANEXT and PSAACR-F; improves the installation flexibility by allowing cable combing in existing pathways without compromising performance	
Flexible cable design	Improved cable management in high density applications enabling easier installations	
Center de-embedded plug	Performs in center of ANSI/TIA-568-C.2 component range ensuring interoperability and superior performance	
Integral pair manager	Optimizes performance, consistency, and reliability by reducing untwist at plug	
Patented tangle-free latch	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds, and changes	
Slender strain relief boot	Provides easy access in high-density applications	
Robust construction	Rated to 2500 mating cycles	
Identification	Provides identification of performance level, length, and quality control number for future traceability	
Variety of cable colors and lengths	Meets individual length and color-coding requirements for greater system flexibility	
Key version available	Color-specific keys with positive and negative keying features mechanically and visually distinguish connections to prevent unintentional insertion into unlike keyed or non-keyed ports, offering network design flexibility, versatility, and accommodating discrete networks for enhanced security	
Color bands (optional)	Snap onto cable, allowing additional color-coding options	
RJ45 plug lock-in device (optional)	Secures plug into jack to prevent unauthorized removal of patch cord	

applications

The TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology are a component of the TX6A™ 10Gig™ UTP Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future. Key applications include:

- 10GBASE-T Ethernet
- Data center I/O consolidation
- Data center server virtualization
- · Consolidation of network interconnects
- · Back-bone aggregation
- · Parallel processing and high speed computing

TX6A[™] 10Gig[™] UTP Copper Cabling System with MaTriX Technology

TX6A[™] 10Gig[™] UTP Patch Cords with MaTriX Technology

UTP6A*BU Foot lengths: Meter lengths: UTP6A**MBU

Mini-Com®TX6A™ 10Gig™ UTP Jack Module with MaTriX Split Foil Technology

Jack module: Shuttered jack module:

CJ6X88TG***

CJD6X88TG***

TX6A[™] 10Gig[™] UTP Copper Cable with MaTriX Technology

PUP6A04^-UG PUR6A04^-UG PUL6A04‡-+G Plenum: Riser: LSZH: CM: PUC6A04‡-+G

Mini-Com® Angled Flush Mount Modular Patch Panels

CPPA24FMWBLY 24-port, 1 RU: 48-port, 2 RU: CPPA48FMWBLY

Mini-Com® Flat Flush Mount Modular Patch Panels

CPP24FMWBLY 24-port, 1 RU: CPP48FMWBIY 48-port, 2 RU: CPP72FMWBLY 72-port, 2 RU:

For additional modular patch panels reference www.panduit.com

Tools and Accessories

Patch cord removal tool: Flashlight kit: Patch cord color band: Standard RJ45 plug lock-in device: Recessed RJ45 plug lock-in device:

PCRT1 KPCRT1-FL

PCBAND^^-Q

PSL-DCPLX^^^

PSLDCPLRX^^^

*For lengths 3 to 20 feet (increments of one foot) 20, 25, 30, 35, or 40 feet change the length designation in part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) at the end of the part number. For example, the part number for a blue 15 foot patch cord is UTP6A15BU. **For lengths 1 to 10 meters (increments of one meter) 1.5, 2.5, 15, 20, 25, 30, 35, 40 meters, change the length designation in part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) after the M in the part number. For example, the part number for a blue 15 meter patch cord

is UTP6A15MBU.
***To designate color, add suffix IW (Off White),
EI (Electric Ivory), WH (White), IG (International Gray),
OR (Orange), RD (Red), BU (Blue), GR (Green),
YL (Yellow), or VL (Violet).
^To designate color, add suffix BU (Blue), WH (White),
YL (Yellow), or IG (International Gray),
‡To designate color, add suffix BU (Blue) or
WH (White). For additional cable colors, contact
customer service.
+Add suffix E when ordering for countries in Europe,
Middle East, or Africa.


+Add suffix E when ordering for countries in Europe, Middle East, or Africa.

**To designate color, add suffix WH (White), EI (Electric Ivory), IG (International Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), or VL (Violet) before – Q in part number. 25/package.

**MFor colors other than Red, add -BL (Black), -BU (Blue), -GR (Green), -YL (Yellow), -OR (Orange), -IW (International White), or -IG (International Gray) to the end of the part number. 10/package. Add -C for bulk packages of 100.

Contact customer service for keyed patch cords, bulk packaged jack modules, and patch cords.

TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology

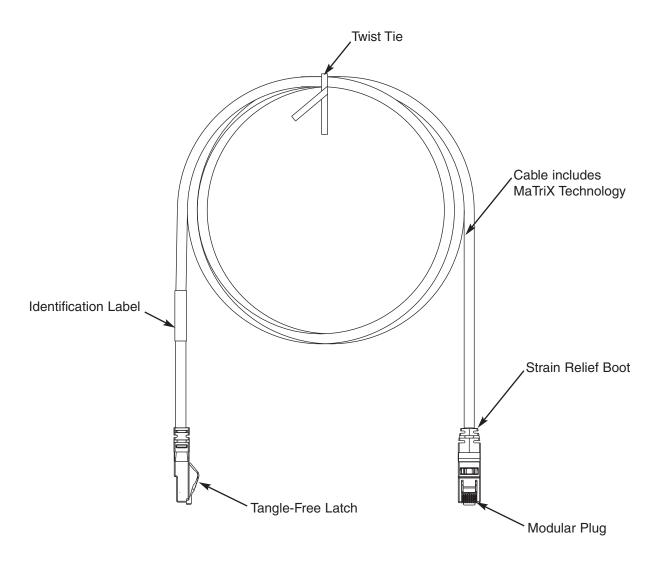

T568B Wiring Scheme

Plug Position	Cable Wire
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000 PANDUIT LATIN AMERICA Jalisco, Mexico cs-la@panduit.com Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty





Contact Customer Service by email: cs@panduit.com or by phone: 800-777-3300 and reference COSP142



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ethernet Cables / Networking Cables category:

Click to view products by Panduit manufacturer:

Other Similar products are found below:

0152660053 603020002 73-7797-25 73-8890-10 73-8890-14 73-8891-14 73-8891-25 73-8892-50 73-8894-10 73-8894-3 73-8895-14 73-8896-7 MCJB2-10P6Q7-120 84909-0204 9QA0-111-12-3.00 1200650742 1200700174 1200860368 1200650013 1201080008 1-21919-1 1300500373 1300101844 1300101845 130050-0004 1300500014 1410147 E16A06002M030 E200102-009-S1 MT14-187L 17-103530 NK5EPC18RDY NK5EPC18VLY NK5EPC18YLY NK5EPC1GRY NK5EPC30BLY NK5EPC30VLY NK5EPC30YLY NK5EPC4Y NK5EPC6YLY NK5EPC9YLY NK6PC30BUY NK6PC30GRY NK6PC30RDY NK6PC30YLY 1969343-6 C501100010 C501106002