

PE4305C2C-AU ~ PE4336C2C-AU Series

ESD Protection

Voltage

5~36 V



Features

- ISO10605(C=330pF, R=330Ω) :
±30kV Air, ±30kV Contact for 5V ~ 24V
±25kV Air, ±20kV Contact for 36V
- HBM $\geq \pm 8\text{KV}$ & CDM $\geq \pm 2\text{KV}$
- IEC61000-4-5(Lightning) : 3.3~17.5A(8/20uS)
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : SOT-323 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.005 grams

SOT-323



Maximum Ratings and Thermal Characteristics (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	V _{ESD}	±30	kV
ESD IEC61000-4-2(Contact)		±30	
Typical Thermal Resistance ^(Note 1)	R _{θJA}	540	°C/W
Operating Junction Temperature Range	T _J	-55~150	°C
Storage Temperature Range	T _{STG}	-55~150	°C

PE4305C2C-AU ~ PE4336C2C-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PE4305C2C-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	5	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	6	-	8.5	V
Reverse Leakage Current	I_R	$V_R = 5\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	8.5	V
		$I_{PP} = 17.5\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	12.4	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	200	pF

PE4309C2C-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	9	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	9.9	-	12	V
Reverse Leakage Current	I_R	$V_R = 9\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	13	V
		$I_{PP} = 9.5\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	23	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	120	pF

PE4312C2C-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	12	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	13.2	-	15.5	V
Reverse Leakage Current	I_R	$V_R = 12\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	17	V
		$I_{PP} = 8.3\text{A}$, $t_P = 8/20\mu\text{s}$	-	-	26.5	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	90	pF

PE4305C2C-AU ~ PE4336C2C-AU Series

PE4315C2C-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	15	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	16.5	-	20	V
Reverse Leakage Current	I_R	$V_R = 15V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	22	V
		$I_{PP} = 7.8A, t_P = 8/20\mu s$	-	-	28	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	65	pF

PE4318C2C-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	18	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	19.8	-	23.5	V
Reverse Leakage Current	I_R	$V_R = 18V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	26.5	V
		$I_{PP} = 7A, t_P = 8/20\mu s$	-	-	36	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	60	pF

PE4322C2C-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	22	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	24.2	-	30	V
Reverse Leakage Current	I_R	$V_R = 22V$	-	-	0.05	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	34	V
		$I_{PP} = 5A, t_P = 8/20\mu s$	-	-	44	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	45	pF

PE4305C2C-AU ~ PE4336C2C-AU Series

PE4324C2C-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	24	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	26.4	-	31	V
Reverse Leakage Current	I_R	$V_R = 24V$	-	-	0.05	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	35	V
		$I_{PP} = 4.8A, t_P = 8/20\mu s$	-	-	45	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	42	pF

PE4336C2C-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	36	V
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	39.6	-	47	V
Reverse Leakage Current	I_R	$V_R = 36V$	-	-	0.05	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	51	V
		$I_{PP} = 3.3A, t_P = 8/20\mu s$	-	-	65	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	20	pF

NOTES :

1. Mounted on a FR4 PCB, single-sided copper, standard footprint.
2. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.

PE4305C2C-AU ~ PE4336C2C-AU Series

TYPICAL CHARACTERISTIC CURVES

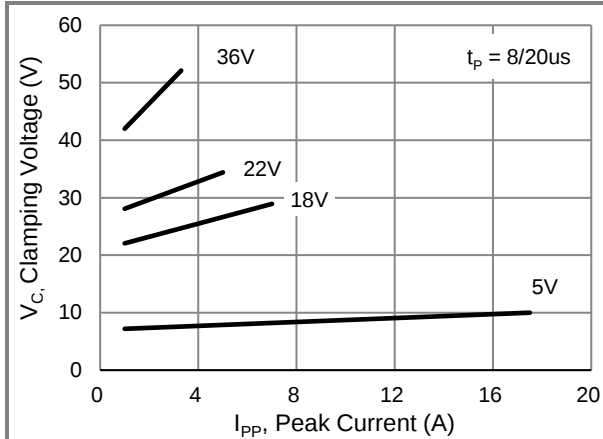


Fig.1 Typical Peak Clamping Voltage

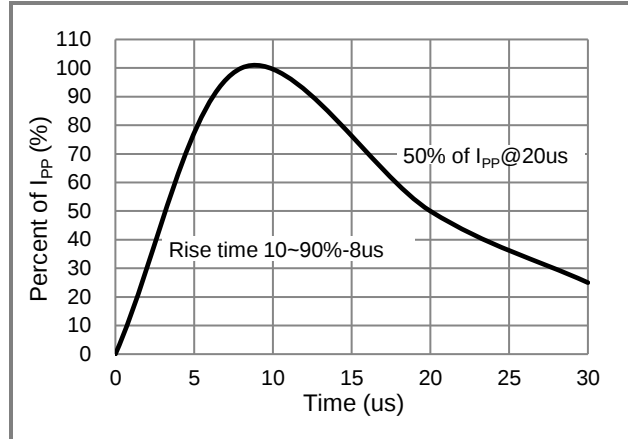


Fig.2 Pulse Waveform

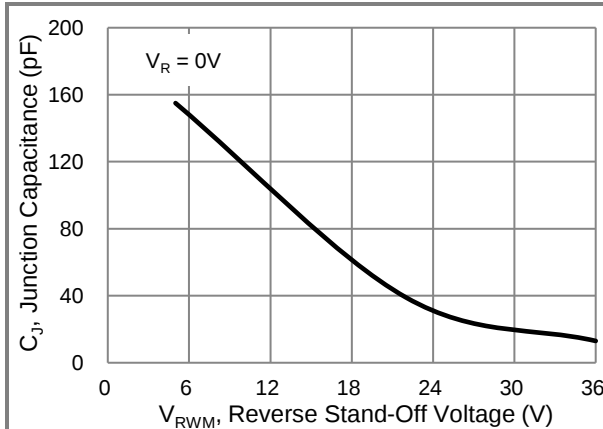


Fig.3 Typical Junction Capacitance

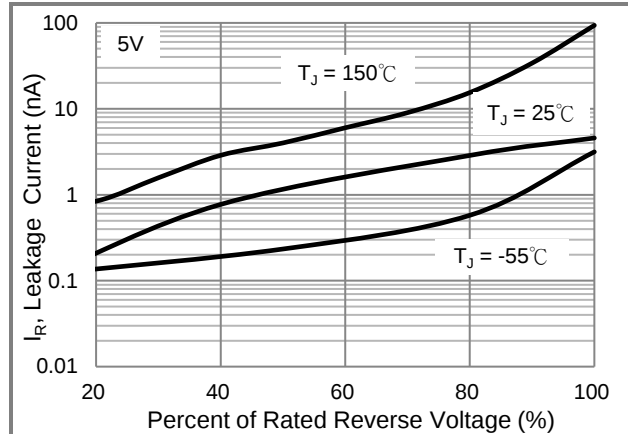


Fig.4 Typical Reverse Characteristics

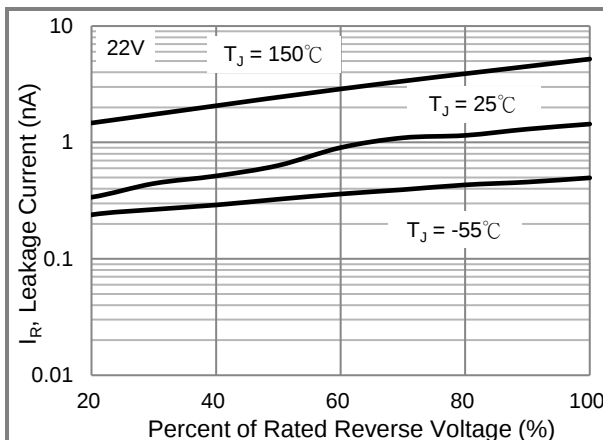


Fig.5 Typical Reverse Characteristics

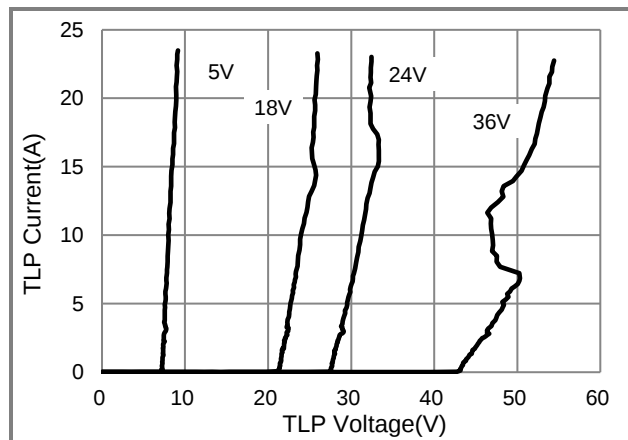



Fig.6 TLP Measurement

PE4305C2C-AU ~ PE4336C2C-AU Series

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PE4305C2C-AU	SOT-323	3K pcs / 7" reel	AA2
PE4309C2C-AU	SOT-323	3K pcs / 7" reel	AA3
PE4312C2C-AU	SOT-323	3K pcs / 7" reel	AA4
PE4315C2C-AU	SOT-323	3K pcs / 7" reel	AA5
PE4318C2C-AU	SOT-323	3K pcs / 7" reel	AA6
PE4322C2C-AU	SOT-323	3K pcs / 7" reel	AA7
PE4324C2C-AU	SOT-323	3K pcs / 7" reel	AA8
PE4336C2C-AU	SOT-323	3K pcs / 7" reel	AA9

Packaging Information & Mounting Pad Layout

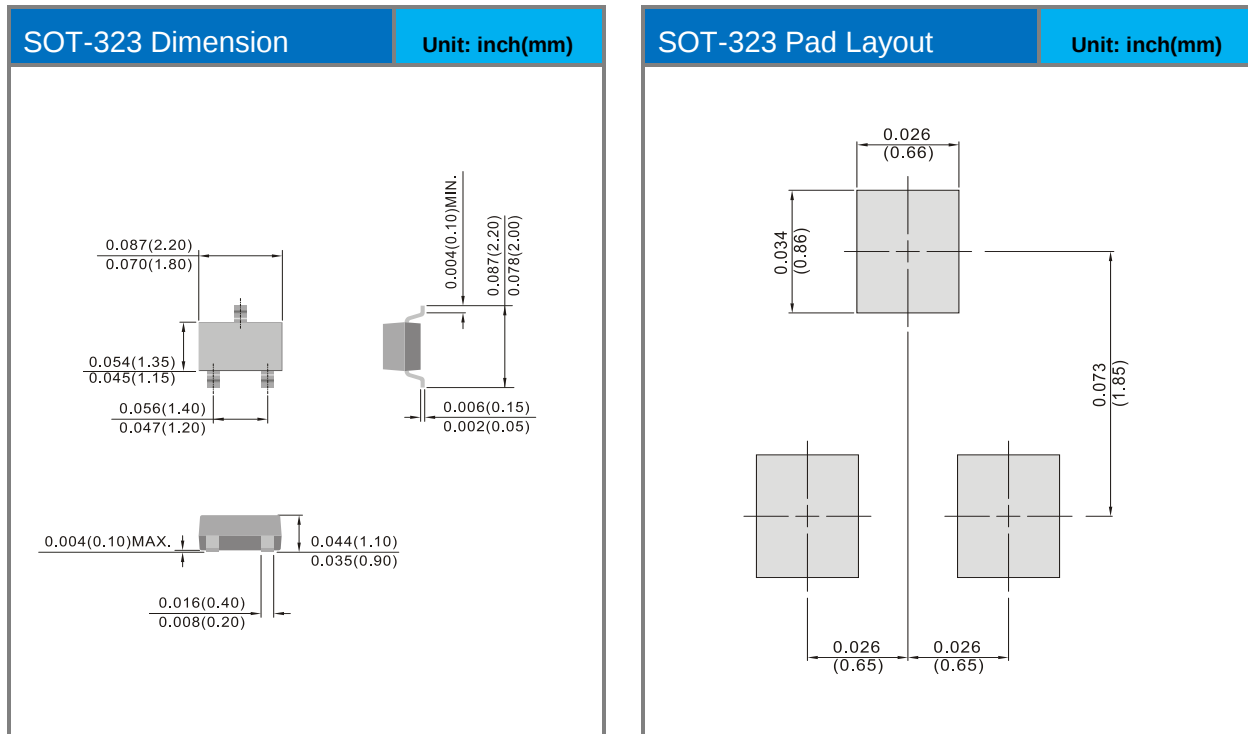

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Panjit](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)