

PE4703L1Q-AU ~ PE4748L1Q-AU Series

Hi-Surge ESD Protection

Voltage

3.3~48 V



Features

- IEC61000-4-2(ESD) : ± 30 kV Air, ± 30 kV Contact
- IEC61000-4-4(EFT) : 40A(5/50ns)
- IEC61000-4-5(Lightning) : 19A ~ 100A(8/20uS)
- Low clamping voltage
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : DFN1610-2L Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0024 grams

DFN1610-2L



Maximum Ratings and Thermal Characteristics (T_A = 25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	V _{ESD}	± 30	kV
ESD IEC61000-4-2(Contact)		± 30	
Typical Thermal Resistance ^(Note 1)	R _{θJA}	300	°C/W
Operating Junction Temperature Range	T _J	-55~150	°C
Storage Temperature Range	T _{STG}	-55~150	°C

PE4703L1Q-AU ~ PE4748L1Q-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PE4703L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	3.3	V
Maximum Peak Pulse Current	I_{PP}	$t_P = 8/20\mu\text{s}$	-	-	110	A
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	4	-	6.5	V
Reverse Leakage Current	I_R	$V_R = 3.3\text{V}$	-	-	3	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$	-	-	8	V
		$I_{PP} = 110\text{A}, t_P = 8/20\mu\text{s}$	-	-	12.7	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	1500	pF

PE4705L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	5	V
Maximum Peak Pulse Current	I_{PP}	$t_P = 8/20\mu\text{s}$	-	-	100	A
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	5.5	-	9	V
Reverse Leakage Current	I_R	$V_R = 5\text{V}$	-	-	3	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$	-	-	9	V
		$I_{PP} = 100\text{A}, t_P = 8/20\mu\text{s}$	-	-	14.5	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	1300	pF

PE4707L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	7	V
Maximum Peak Pulse Current	I_{PP}	$t_P = 8/20\mu\text{s}$	-	-	88	A
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1\text{mA}$	7.7	-	9.5	V
Reverse Leakage Current	I_R	$V_R = 7\text{V}$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}, t_P = 8/20\mu\text{s}$	-	-	10.5	V
		$I_{PP} = 88\text{A}, t_P = 8/20\mu\text{s}$	-	-	16.5	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{MHz}$	-	-	960	pF

PE4703L1Q-AU ~ PE4748L1Q-AU Series

PE4709L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	9	V
Maximum Peak Pulse Current	I_{PP}	$t_P = 8/20\mu s$	-	-	73	A
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	9.9	-	12	V
Reverse Leakage Current	I_R	$V_R = 9V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	13.5	V
		$I_{PP} = 73A, t_P = 8/20\mu s$	-	-	20	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	700	pF

PE4712L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	12	V
Maximum Peak Pulse Current	I_{PP}	$t_P = 8/20\mu s$	-	-	58	A
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	13.2	-	15.5	V
Reverse Leakage Current	I_R	$V_R = 12V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	18	V
		$I_{PP} = 58A, t_P = 8/20\mu s$	-	-	27	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	600	pF

PE4715L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	15	V
Maximum Peak Pulse Current	I_{PP}	$t_P = 8/20\mu s$	-	-	45	A
Reverse Breakdown Voltage	V_{BR}	$I_{BT} = 1mA$	16.5	-	20	V
Reverse Leakage Current	I_R	$V_R = 15V$	-	-	1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1A, t_P = 8/20\mu s$	-	-	22.5	V
		$I_{PP} = 45A, t_P = 8/20\mu s$	-	-	32	V
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1MHz$	-	-	480	pF

PE4703L1Q-AU ~ PE4748L1Q-AU Series

PE4720L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V _{RWM}	-	-	-	20	V
Maximum Peak Pulse Current	I _{PP}	t _P = 8/20us	-	-	34	A
Reverse Breakdown Voltage	V _{BR}	I _{BT} = 1mA	22	-	26	V
Reverse Leakage Current	I _R	V _R = 20V	-	-	1	uA
Clamping Voltage	V _{CL}	I _{PP} = 1A, t _P = 8/20us	-	-	30	V
		I _{PP} = 34A, t _P = 8/20us	-	-	43	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz	-	-	310	pF

PE4724L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V _{RWM}	-	-	-	24	V
Maximum Peak Pulse Current	I _{PP}	t _P = 8/20us	-	-	32	A
Reverse Breakdown Voltage	V _{BR}	I _{BT} = 1mA	26.4	-	31	V
Reverse Leakage Current	I _R	V _R = 24V	-	-	1	uA
Clamping Voltage	V _{CL}	I _{PP} = 1A, t _P = 8/20us	-	-	35	V
		I _{PP} = 32A, t _P = 8/20us	-	-	45	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz	-	-	280	pF

PE4728L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V _{RWM}	-	-	-	28	V
Maximum Peak Pulse Current	I _{PP}	t _P = 8/20us	-	-	27.5	A
Reverse Breakdown Voltage	V _{BR}	I _{BT} = 1mA	30	-	35.5	V
Reverse Leakage Current	I _R	V _R = 28V	-	-	1	uA
Clamping Voltage	V _{CL}	I _{PP} = 1A, t _P = 8/20us	-	-	42	V
		I _{PP} = 27.5A, t _P = 8/20us	-	-	52	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz	-	-	230	pF

PE4703L1Q-AU ~ PE4748L1Q-AU Series

PE4736L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V _{RWM}	-	-	-	36	V
Maximum Peak Pulse Current	I _{PP}	t _P = 8/20us	-	-	19	A
Reverse Breakdown Voltage	V _{BR}	I _{BT} = 1mA	39.6	-	46.5	V
Reverse Leakage Current	I _R	V _R = 36V	-	-	1	uA
Clamping Voltage	V _{CL}	I _{PP} = 1A, t _P = 8/20us	-	-	52.5	V
		I _{PP} = 19A, t _P = 8/20us	-	-	75	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz	-	-	190	pF

PE4748L1Q-AU

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V _{RWM}	-	-	-	48	V
Maximum Peak Pulse Current	I _{PP}	t _P = 8/20us	-	-	15	A
Reverse Breakdown Voltage	V _{BR}	I _{BT} = 1mA	52.8	-	62	V
Reverse Leakage Current	I _R	V _R = 48V	-	-	1	uA
Clamping Voltage	V _{CL}	I _{PP} = 1A, t _P = 8/20us	-	-	69.6	V
		I _{PP} = 15A, t _P = 8/20us	-	-	96	V
Off State Junction Capacitance	C _J	0Vdc Bias f = 1MHz	-	-	150	pF

NOTES :

1. Mounted on a FR4 PCB, single-sided copper, standard footprint.
2. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.

PE4703L1Q-AU ~ PE4748L1Q-AU Series

TYPICAL CHARACTERISTIC CURVES

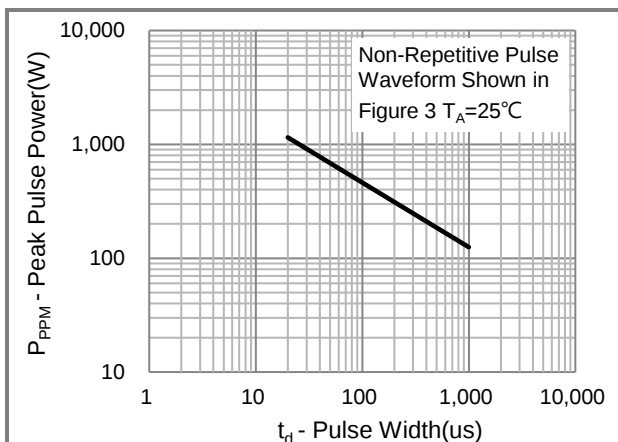


Fig.1 Peak Pulse Power Rating Curve

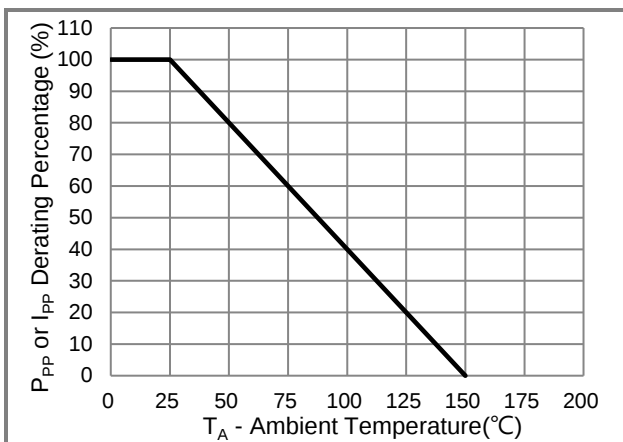


Fig.2 Derating Curve

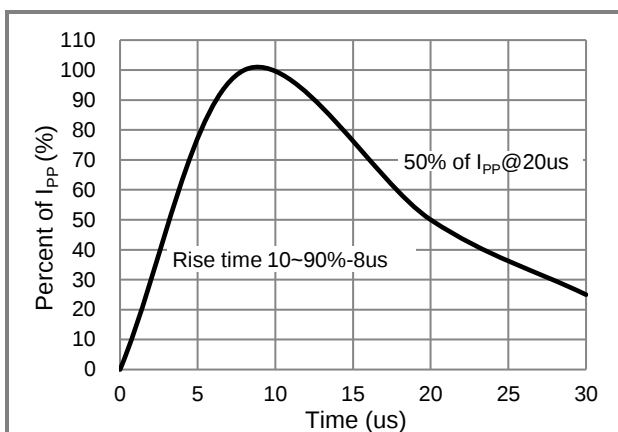


Fig.3 Pulse Waveform

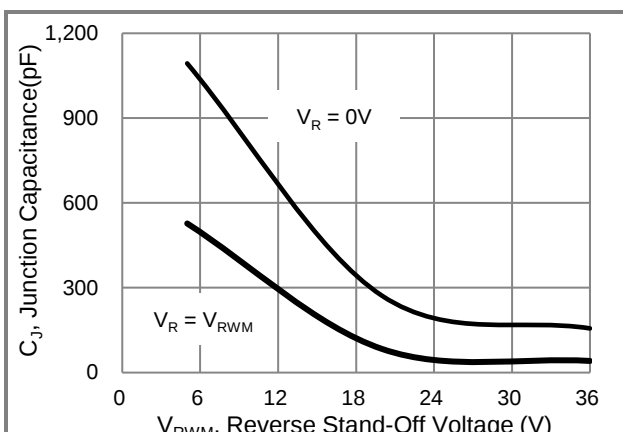


Fig.4 Typical Junction Capacitance

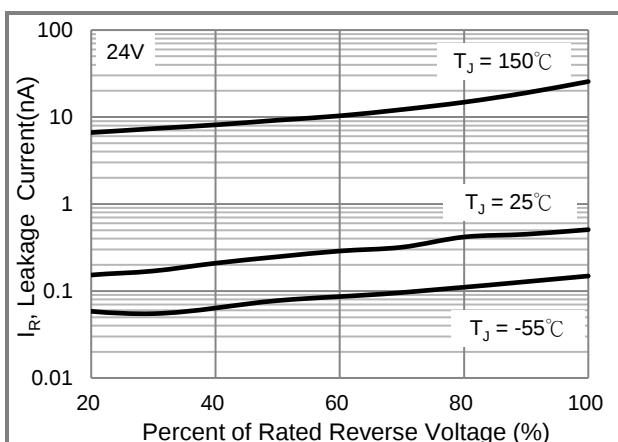


Fig.5 Typical Reverse Characteristics

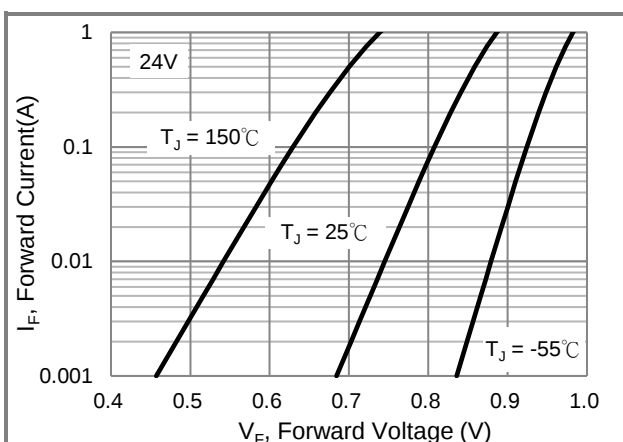




Fig.6 Typical Forward Characteristics

PE4703L1Q-AU ~ PE4748L1Q-AU Series

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PE4703L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JP
PE4705L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JA
PE4707L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JB
PE4709L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JD
PE4712L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JF
PE4715L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JG
PE4720L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JH
PE4724L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JI
PE4728L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JM
PE4736L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JL
PE4748L1Q-AU	DFN1610-2L	3K pcs / 7" reel	JN

Packaging Information & Mounting Pad Layout

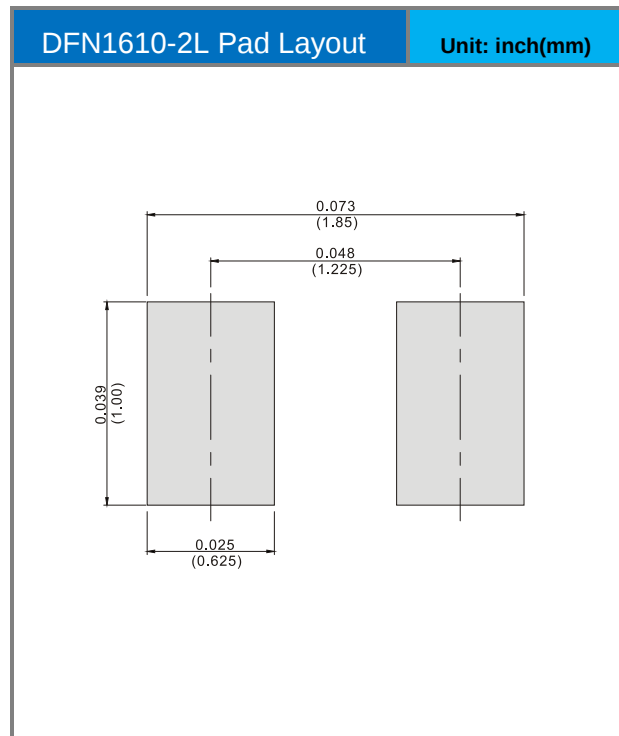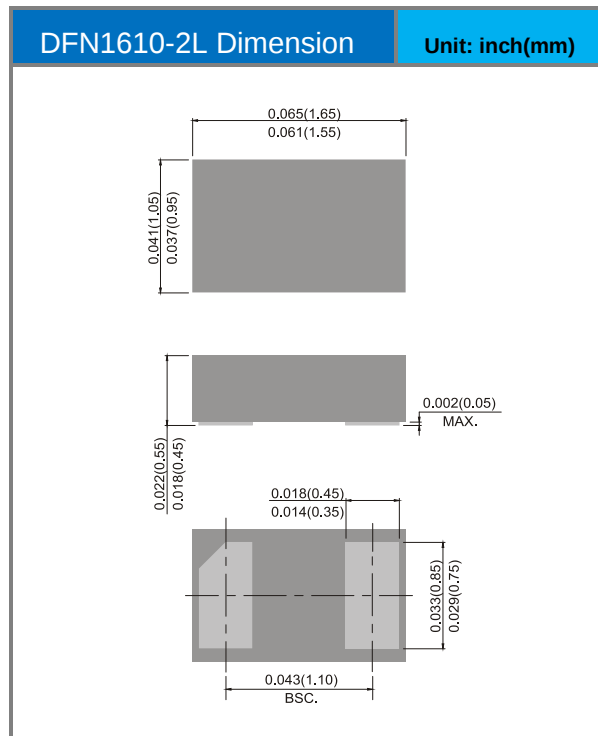

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Panjit](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)