

PEC3202M1Q-AU ~ PEC3205M1Q-AU Series

ESD Protection

Voltage

2.5~5 V



Features

- ISO10605(C=330pF, R=330Ω) : ±30kV Air, ±30kV Contact
- HBM $\geq \pm 8\text{KV}$ & CDM $\geq \pm 2\text{KV}$
- IEC61000-4-5(Lightning) : 5~10A(8/20uS)
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : DFN1006-2L Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0006 grams

DFN1006-2L



Maximum Ratings and Thermal Characteristics (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	V _{ESD}	±30	kV
ESD IEC61000-4-2(Contact)		±30	
Typical Thermal Resistance ^(Note 1)	R _{θJA}	430	°C/W
Operating Junction Temperature Range	T _J	-55~150	°C
Storage Temperature Range	T _{STG}	-55~150	°C

PEC3202M1Q-AU ~ PEC3205M1Q-AU Series

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PEC3202M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	2.5	V
Reverse Breakdown Voltage	V_{BR}	$I_{BR} = 50\text{ mA}$	2.6	-	4	V
Reverse Leakage Current	I_R	$V_R = 2.5\text{ V}$	-	-	0.5	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{ A}$, $t_P = 8/20\text{ }\mu\text{s}$	-	-	4.5	V
		$I_{PP} = 10\text{ A}$, $t_P = 8/20\text{ }\mu\text{s}$	-	-	9	
Clamping Voltage TLP ^(Note 3)	V_{CL}	$I_{PP} = 8\text{ A}$, $t_P = 100\text{ ns}$,	-	7.16	-	V
		$I_{PP} = 16\text{ A}$, $t_P = 100\text{ ns}$,	-	9.3	-	
Dynamic Resistance	R_{DYN}	$t_P = 100\text{ ns}$	-	0.27	-	Ω
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{ MHz}$	-	-	20	pF

PEC3203M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_{BR} = 50\text{ mA}$	3.5	-	4.5	V
Reverse Leakage Current	I_R	$V_R = 3.3\text{ V}$	-	-	0.5	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{ A}$, $t_P = 8/20\text{ }\mu\text{s}$	-	-	5.5	V
		$I_{PP} = 10\text{ A}$, $t_P = 8/20\text{ }\mu\text{s}$	-	-	9	
Clamping Voltage TLP ^(Note 3)	V_{CL}	$I_{PP} = 8\text{ A}$, $t_P = 100\text{ ns}$,	-	7.2	-	V
		$I_{PP} = 16\text{ A}$, $t_P = 100\text{ ns}$,	-	9.2	-	
Dynamic Resistance	R_{DYN}	$t_P = 100\text{ ns}$	-	0.25	-	Ω
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1\text{ MHz}$	-	-	20	pF

PEC3202M1Q-AU ~ PEC3205M1Q-AU Series







PEC3205M1Q-AU						
PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage ^(Note 2)	V_{RWM}	-	-	-	5	V
Reverse Breakdown Voltage	V_{BR}	$I_{SB} = 50 \text{ mA}$	5.5	-	8	V
Reverse Leakage Current	I_R	$V_R = 5 \text{ V}$	-	-	0.5	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1 \text{ A}, t_P = 8/20 \text{ }\mu\text{s}$	-	-	10	V
		$I_{PP} = 5 \text{ A}, t_P = 8/20 \text{ }\mu\text{s}$	-	-	13	
Clamping Voltage TLP ^(Note 3)	V_{CL}	$I_{PP} = 8 \text{ A}, t_P = 100 \text{ ns},$	-	11.8	-	V
		$I_{PP} = 16 \text{ A}, t_P = 100 \text{ ns},$	-	15.9	-	
Dynamic Resistance	R_{DYN}	$t_P = 100 \text{ ns}$	-	0.51	-	Ω
Off State Junction Capacitance	C_J	0Vdc Bias $f = 1 \text{ MHz}$	-	-	20	pF

NOTES :

1. Mounted on a FR4 PCB, single-sided copper, standard footprint.
2. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.
3. Testing using Transmission Line Pulse (TLP) conditions: $Z_0 = 50 \text{ }\Omega$, $t_P = 100 \text{ ns}$.

PEC3202M1Q-AU ~ PEC3205M1Q-AU Series

TYPICAL CHARACTERISTIC CURVES

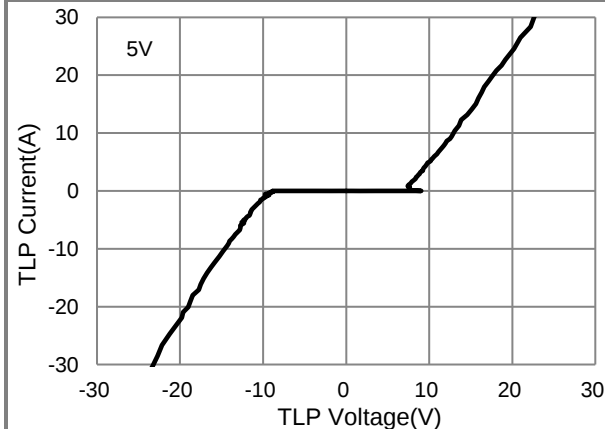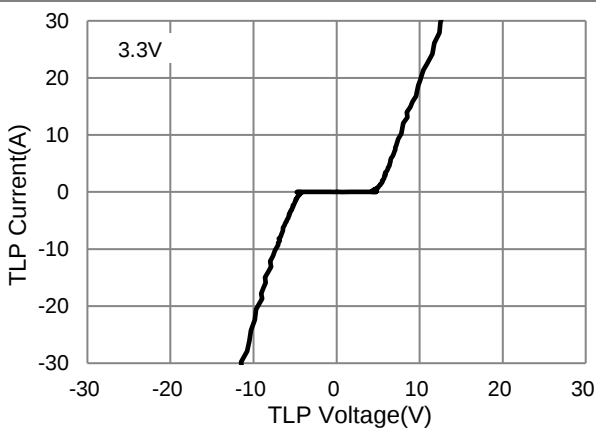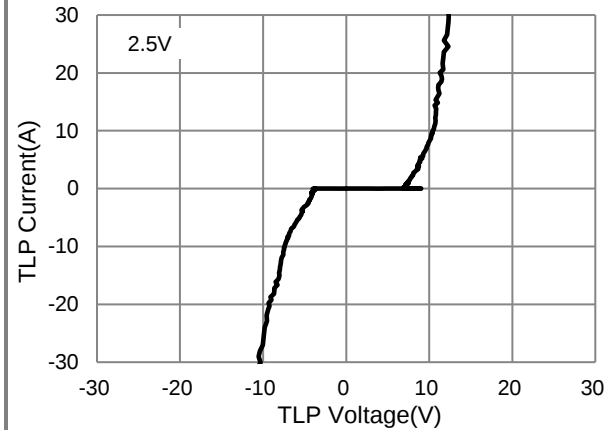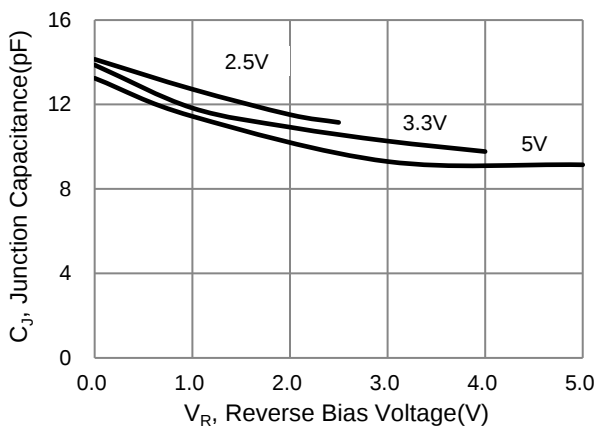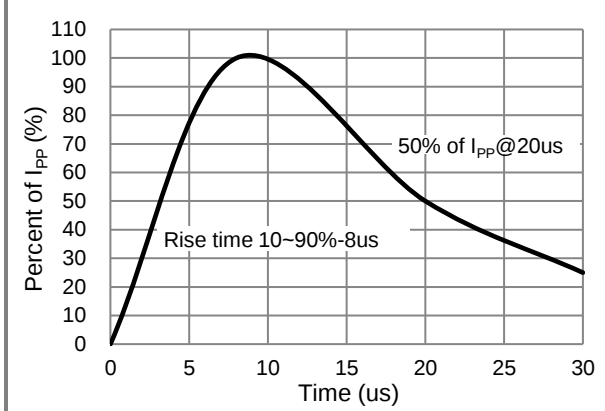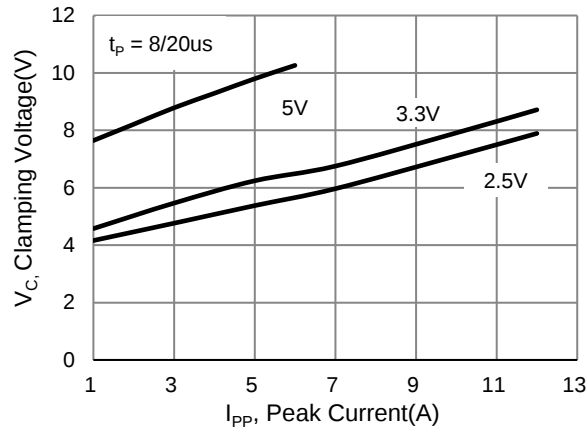

PEC3202M1Q-AU ~ PEC3205M1Q-AU Series

TYPICAL CHARACTERISTIC CURVES

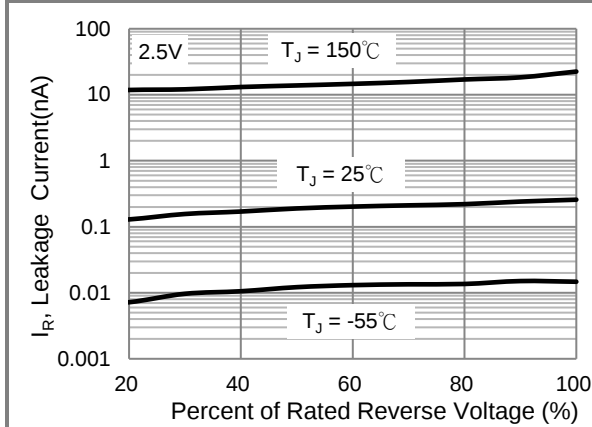


Fig.7 Typical Reverse Characteristics

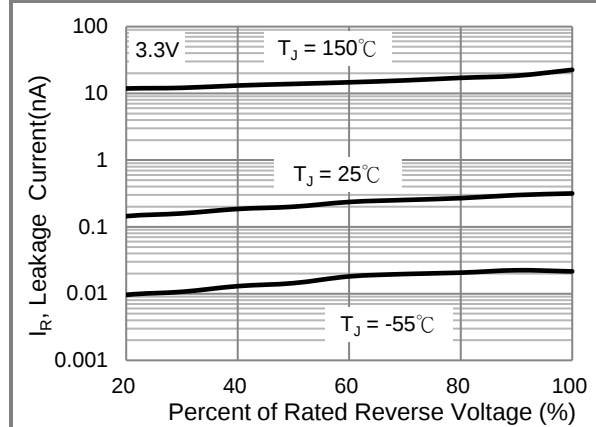


Fig.8 Typical Reverse Characteristics

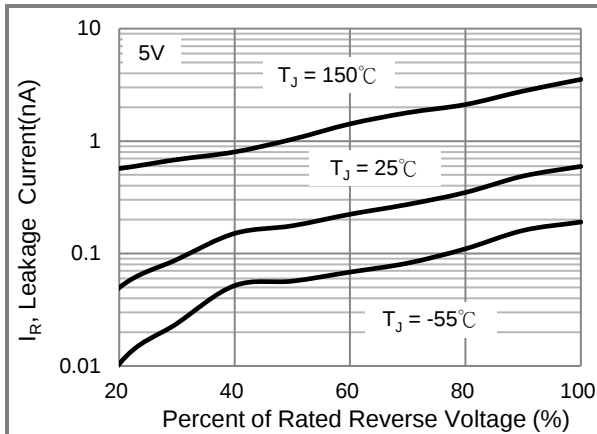


Fig.9 Typical Reverse Characteristics

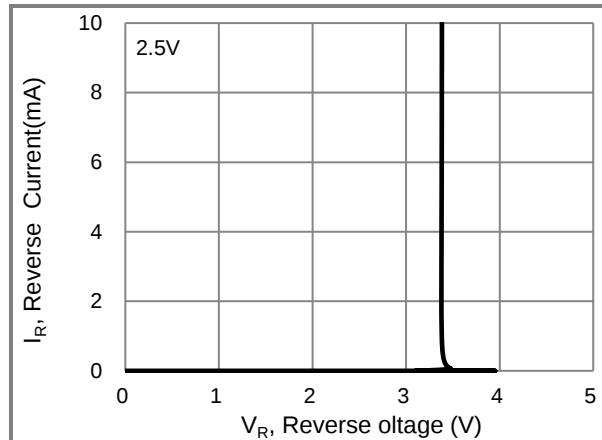


Fig.10 Typical Reverse Characteristics

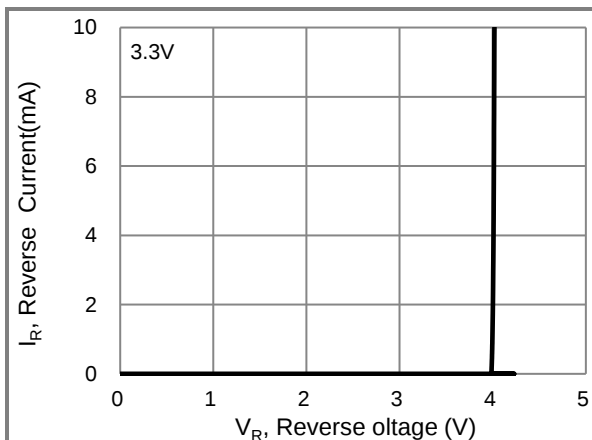


Fig.11 Typical Reverse Characteristics

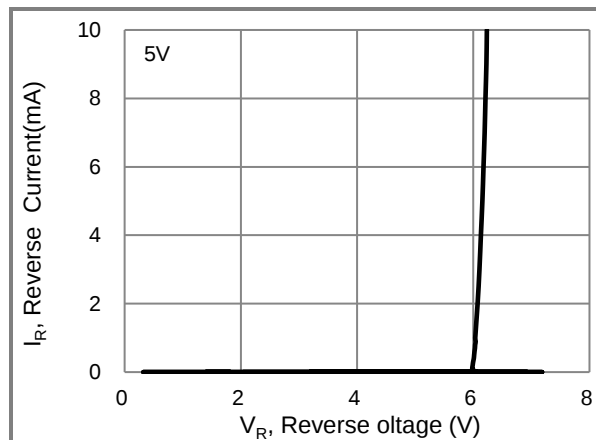




Fig.12 Typical Reverse Characteristics

PEC3202M1Q-AU ~ PEC3205M1Q-AU Series

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PEC3202M1Q-AU	DFN1006-2L	10K pcs / 7" reel	KJ
PEC3203M1Q-AU	DFN1006-2L	10K pcs / 7" reel	KK
PEC3205M1Q-AU	DFN1006-2L	10K pcs / 7" reel	HE

Packaging Information & Mounting Pad Layout

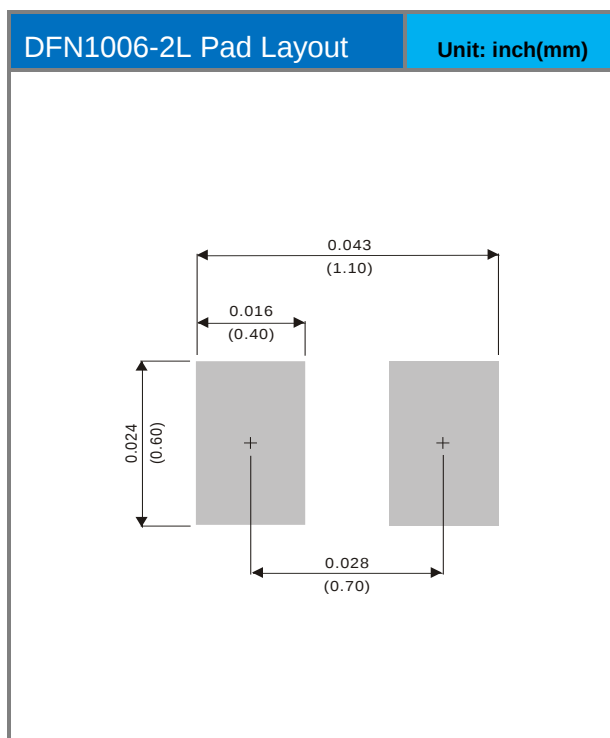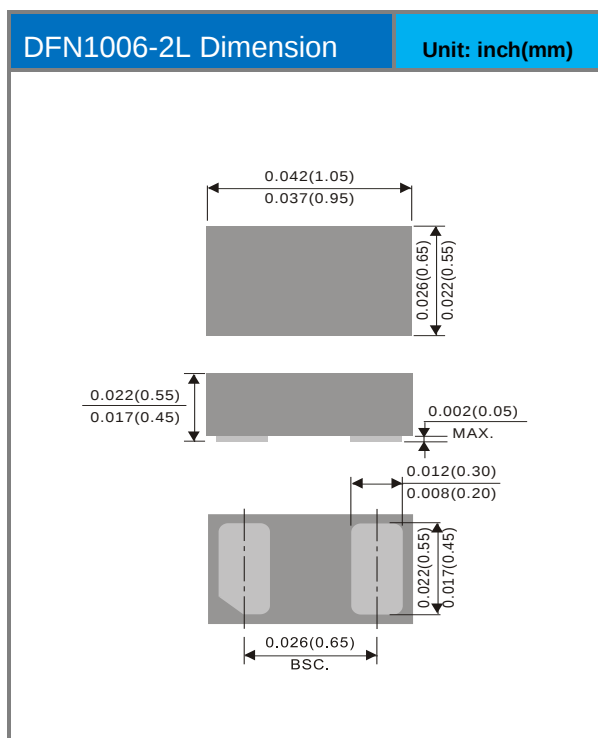

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Protection Diodes / TVS Diodes](#) ***category:***

Click to view products by [Panjit](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6475](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [CPDT-5V0USP-HF](#) [HSPC16701B02TP](#) [JANTX1N6052A](#)
[D3V3Q1B2DLP3-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [5KP48A](#) [5KP90A](#)
[15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE13CA](#) [P6KE43CA](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA18A](#)
[SA11CA](#) [SMCJ78CA](#) [SMBJ51CA](#) [JANTX1N5650A](#) [SMDA05LC-LF](#) [30KPA48A-LF](#) [GPZ1275](#) [P4KE6.8A](#) [CPDQC12VE-HF](#)
[GRPADATAJANTX1N6041A](#) [DSILC6-4SC6](#) [5KP45A-TP](#) [SMLJ26A-TP](#) [D5V0Q1B2CSP-7](#) [NSPM3042MXT5G](#)