

PJA3401-AU

30V P-Channel Enhancement Mode MOSFET

Voltage

-30 V

Current

-3.6A



Features

- $R_{DS(ON)}$, $V_{GS}@-10V$, $I_D@-3.6A < 72m\Omega$
- $R_{DS(ON)}$, $V_{GS}@-4.5V$, $I_D@-2.3A < 82m\Omega$
- $R_{DS(ON)}$, $V_{GS}@-2.5V$, $I_D@-1.4A < 115m\Omega$
- Advanced Trench Process Technology
- Specially Designed for Switch Load, PWM Application, etc
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : SOT-23 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.0003 ounces, 0.0084 grams

SOT-23



Maximum Ratings and Thermal Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage		V _{DS}	-30	V
Gate-Source Voltage		V _{GS}	±12	
Continuous Drain Current ^(Note 4)		I _D	-3.6	A
Pulsed Drain Current ^(Note 1)		I _{DM}	-14.4	
Power Dissipation	T _a =25°C	P _D	1.25	W
	Derate above 25°C		10	mW/°C
Operating Junction and Storage Temperature Range		T _J , T _{STG}	-55~150	°C
Typical Thermal Resistance		R _{θJA}	100	°C/W
- Junction to Ambient ^(Note 3,4)				

PJA3401-AU

Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =-250uA	-30	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250uA	-0.5	-0.97	-1.3	
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =-10V, I _D =-3.6A	-	60	72	mΩ
		V _{GS} =-4.5V, I _D =-2.3A	-	67	82	
		V _{GS} =-2.5V, I _D =-1.4A	-	84	115	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-30V, V _{GS} =0V	-	-	-1	uA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =+12V, V _{DS} =0V	-	-	+100	nA
Dynamic ^(Note 5)						
Total Gate Charge	Q _g	V _{DS} =-15V, I _D =-3.6A, V _{GS} =-10V ^(Note 1,2)	-	15	-	nC
Gate-Source Charge	Q _{gs}		-	1.3	-	
Gate-Drain Charge	Q _{gd}		-	2	-	
Input Capacitance	C _{iss}	V _{DS} =-15V, V _{GS} =0V, f=1MHZ	-	633	-	pF
Output Capacitance	C _{oss}		-	50	-	
Reverse Transfer Capacitance	C _{rss}		-	35	-	
Turn-On Delay Time	td _(on)	V _{DD} =-15V, I _D =-3.6A, V _{GS} =-10V, R _G =6Ω ^(Note 1,2)	-	2.9	-	ns
Turn-On Rise Time	tr		-	43	-	
Turn-Off Delay Time	td _(off)		-	224	-	
Turn-Off Fall Time	tf		-	100	-	
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I _s	---	-	-	-1.5	A
Diode Forward Voltage	V _{SD}	I _S =-1A, V _{GS} =0V	-	-0.77	-1.2	V

NOTES :

1. Pulse width≤300us, Duty cycle≤2%.
2. Essentially independent of operating temperature typical characteristics.
3. R_{ΘJA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins mounted on a 1 inch FR-4 with 2oz. square pad of copper.
4. The maximum current rating is package limited.
5. Guaranteed by design, not subject to production testing.

PJA3401-AU

TYPICAL CHARACTERISTIC CURVES

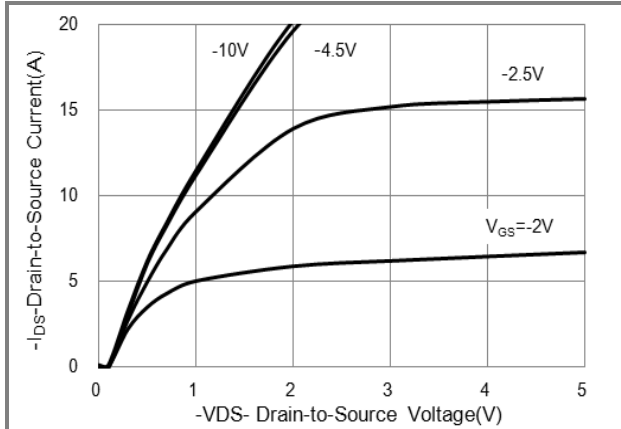


Fig.1 On-Region Characteristics

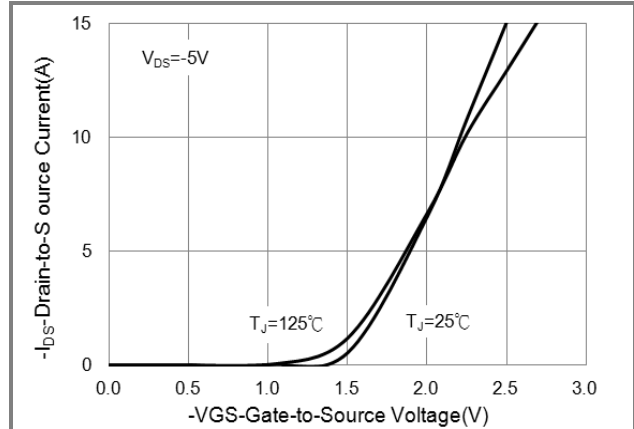


Fig.2 Transfer Characteristics

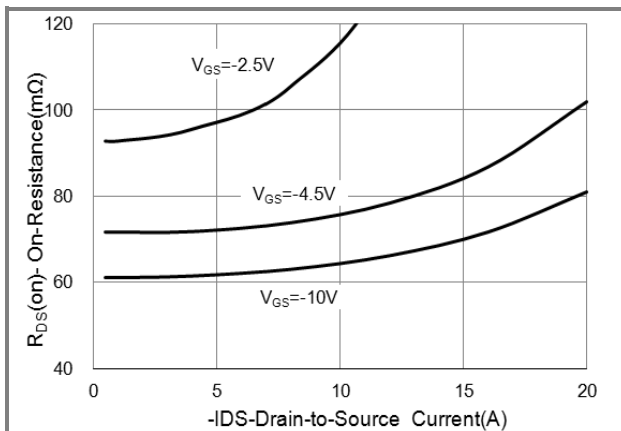


Fig.3 On-Resistance vs. Drain Current

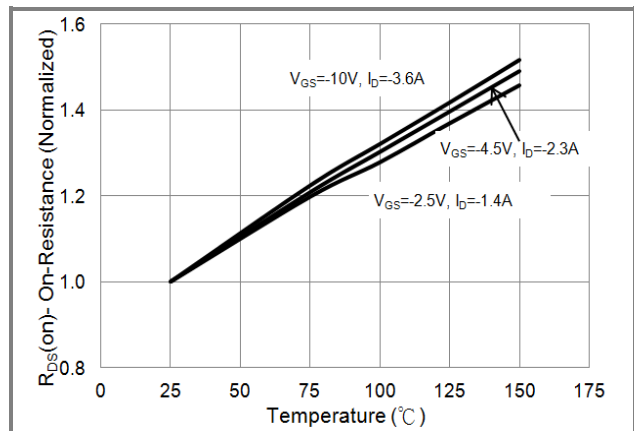


Fig.4 On-Resistance vs. Junction temperature

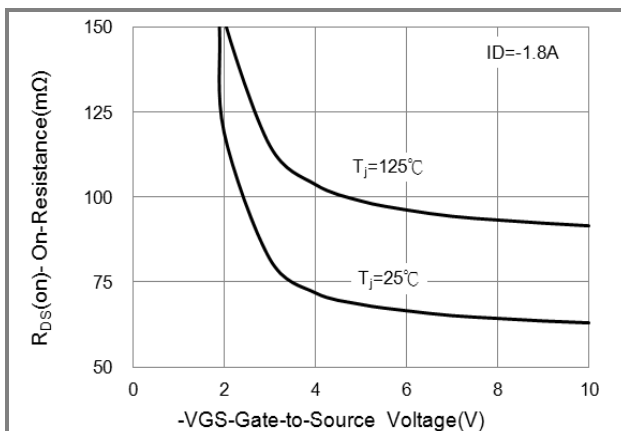


Fig.5 On-Resistance Variation with V_{GS}

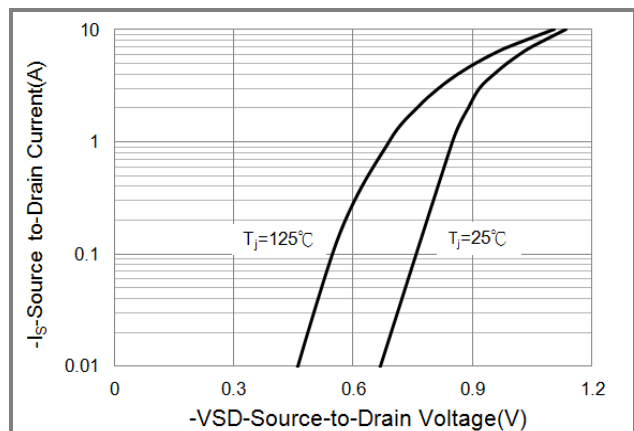


Fig.6 Body Diode Characteristics

PJA3401-AU

TYPICAL CHARACTERISTIC CURVES

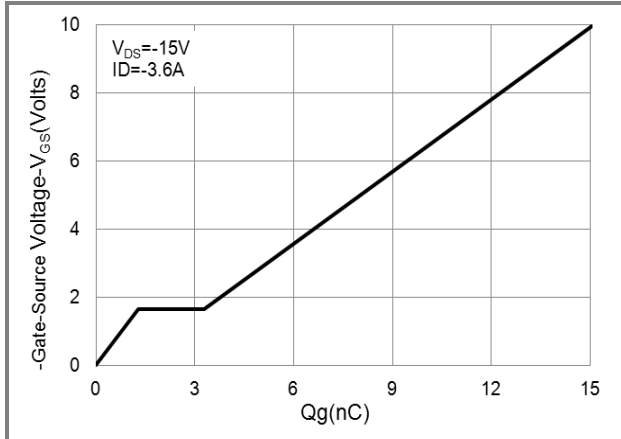


Fig.7 Gate-Charge Characteristics

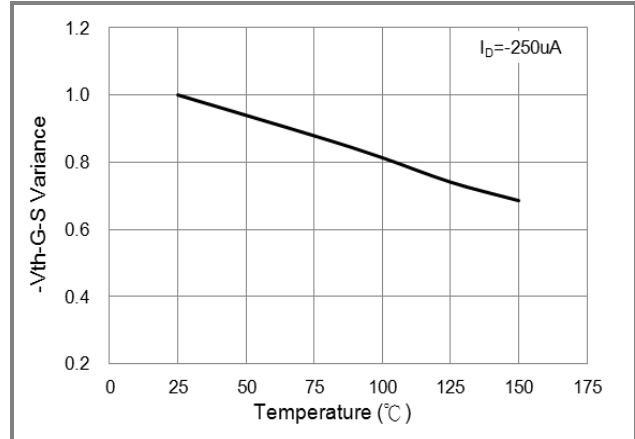


Fig.8 Threshold Voltage Variation with Temperature

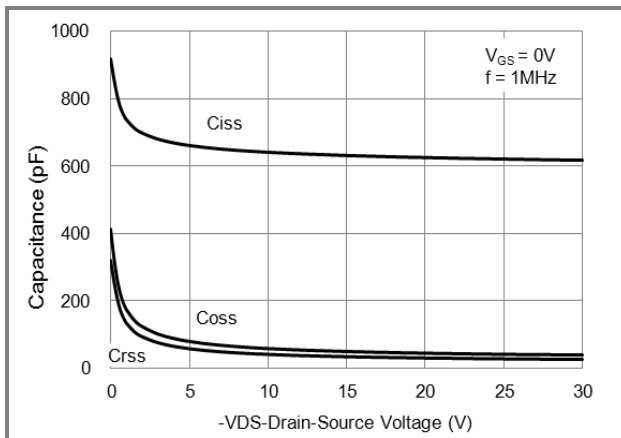




Fig.9 Capacitance vs. Drain-Source Voltage

PJA3401-AU

Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PJA3401-AU	SOT-23	3K pcs / 7" reel	A01

Packaging Information & Mounting Pad Layout

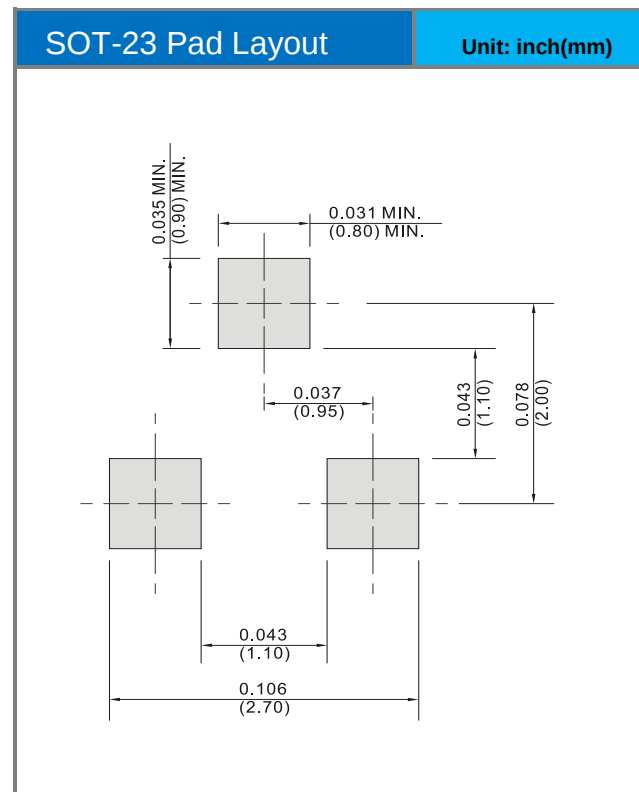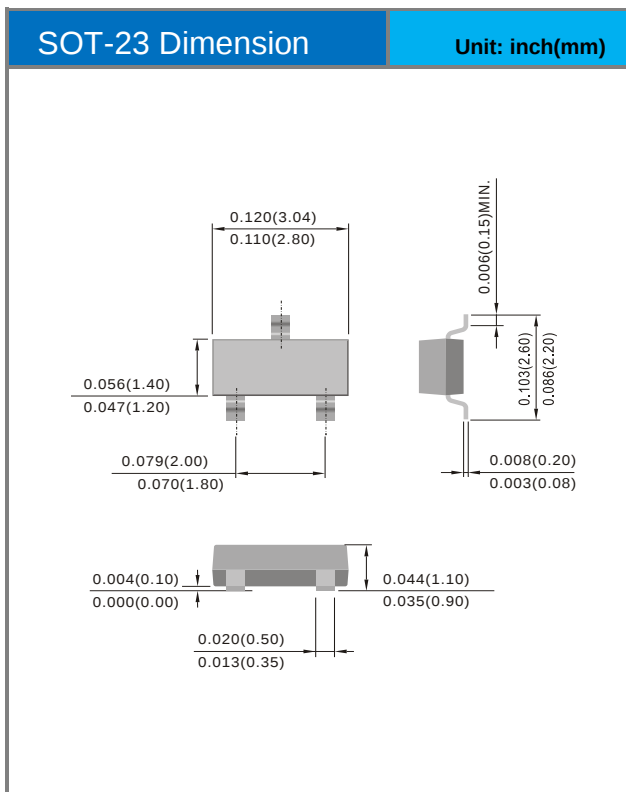

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFETs](#) category:

Click to view products by [Panjit](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [PMV32UP215](#) [NTNS3A92PZT5G](#) [IRFD120](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [2SJ277-DL-E](#)
[MIC4420CM-TR](#) [IRFS350](#) [IPS70R2K0CEAKMA1](#) [AON6932A](#) [TS19452CS RL](#) [2SK2614\(Te16L1,Q\)](#) [EFC2J004NUZTDG](#)
[DMN1053UCP4-7](#) [NTE2384](#) [2N7000TA](#) [743-9](#) [US6M2GTR](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN13M9UCA6-7](#)
[STU7N60DM2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPB45P03P4L11ATMA2](#) [BXP4N65F](#) [BXP2N20L](#) [BXP2N65D](#) [SLF10N65ABV2](#)
[CJAC130SN06L](#) [HSBA6054](#) [HSBB6054](#) [HSBB0210](#) [HSBA6901](#) [BSC004NE2LS5](#) [BSZ075N08NS5](#) [LBSS138DW1T1G](#)
[SSM10N954L,EFF\(S](#) [2SK3878\(STA1,E,S\)](#) [TPN6R303NC,LQ\(S](#) [AP3N5R0MT](#) [AP6NA3R2MT](#) [AP3C023AMT](#) [AP6242](#) [HSBB3909](#)
[HSBA3204](#) [HSBA0903](#)