

WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector

Technical Data Sheet

PEWAN090-10SF

Features

- 8.2 GHz to 12.4 GHz
- WR-90 Waveguide Band
- 10 dBi Nominal Gain
- SMA Female Connector

Applications

- Antenna Measurements
- Wireless Communication
- Laboratory Use
- Microwave Radio Systems
- Radome Testing
- Automotive Antenna Test
- Solutions
- Radar Cross Section
- Satellite Antenna Testing

Description

The PEWAN090-10SF standard gain horn antenna (also known as waveguide horn) from Pasternack is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-90 to SMA Female waveguide to coaxial adapter and operates from 8.2 GHz to 12.4 GHz.

Our PEWAN090-10SF standard gain horn antenna has a nominal gain of 10 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 52.1 dB and 51.6 dB respectively. Pasternack's SMA Female to WR-90 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the PEWAN090-10SF are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-90 waveguide antennas with SMA Female interface is part of over 40,000 RF, microwave and millimeter wave components from Pasternack available worldwide and Ship same day.

Configuration


Design
Coaxial Interface

WR-90 Standard Gain Horn
SMA Female

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	8.2		12.4	GHz
Waveguide Standard Gain Horn				
Gain		10		dBi
Horizontal Half Power Beam Width		52.1		Degrees
Vertical Half Power Beam Width		51.6		Degrees
Waveguide to Coaxial Adapter				
Input VSWR			1.25:1	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN090-10SF](#)



WR-90 Standard Gain Horn with 10 dBi
gain, SMA Female connector

Technical Data Sheet

PEWAN090-10SF

Mechanical Specifications

Size

Length	3.351 in [85.12 mm]
Width	1.63 in [41.4 mm]
Height	1.63 in [41.4 mm]
Weight	0.1 lbs [45.36 g]

RF Connector

Type	SMA Female
------	------------

Waveguide Interface

Waveguide Size	WR-90
----------------	-------


Environmental Specifications

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN090-10SF](#)




WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector


Technical Data Sheet

PEWAN090-10SF

Typical Performance Data

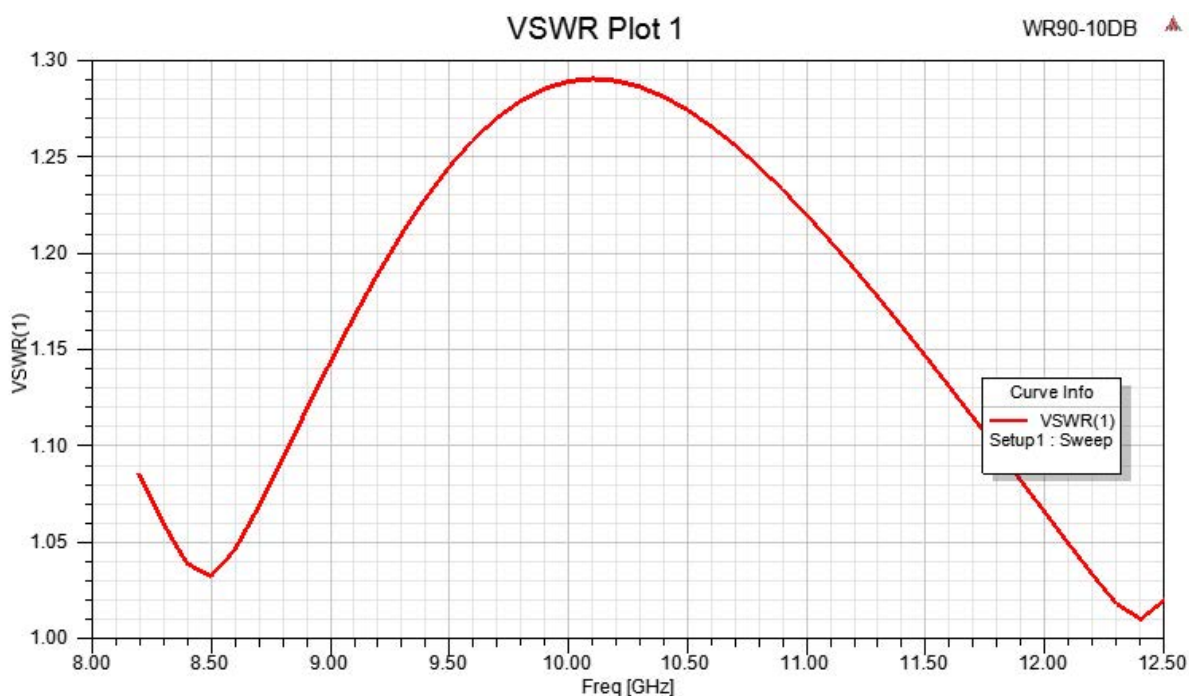


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN090-10SF](#)




WR-90 Standard Gain Horn with 10 dBi
gain, SMA Female connector

Technical Data Sheet

PEWAN090-10SF

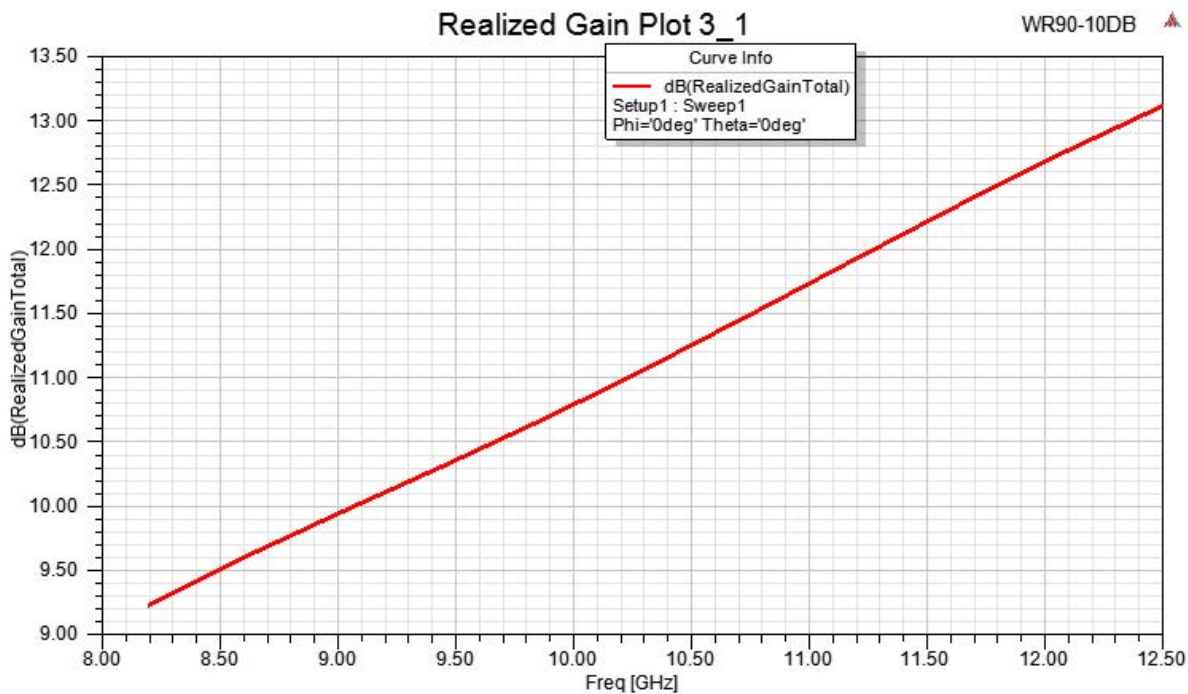


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN090-10SF](#)




WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector

Technical Data Sheet

PEWAN090-10SF

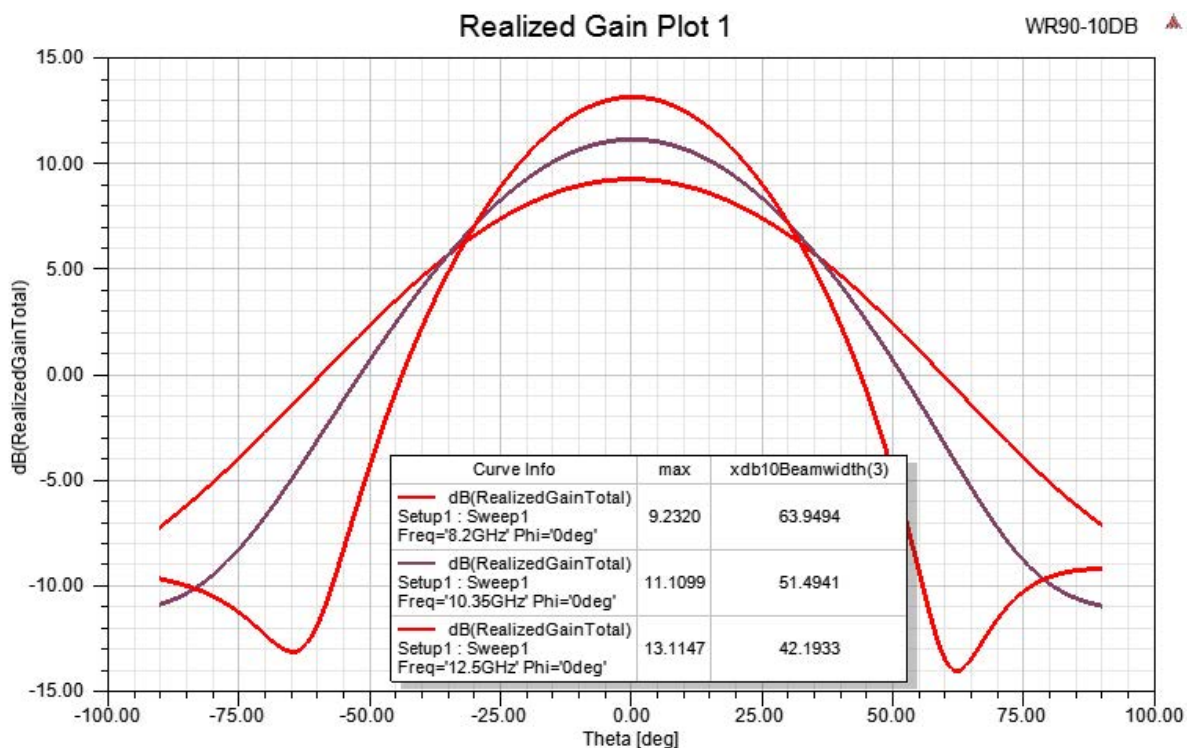


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN090-10SF](#)



WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector

Technical Data Sheet

PEWAN090-10SF

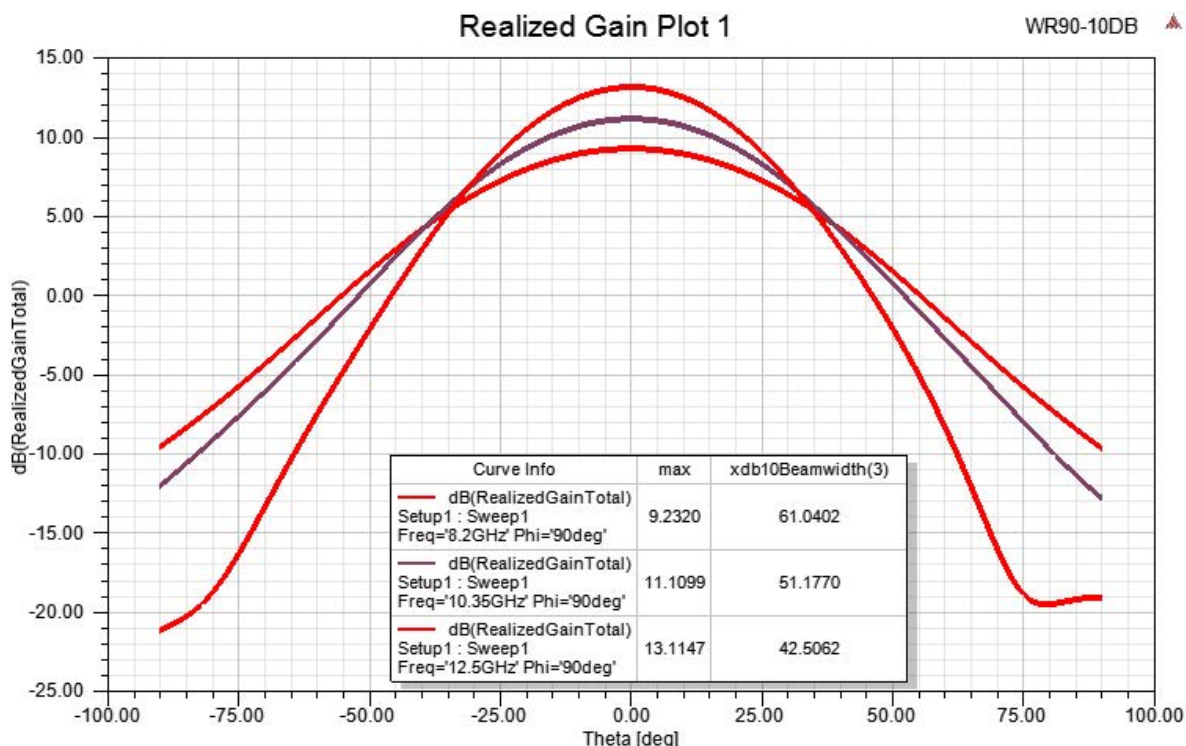

WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Standard Gain Horn with 10 dBi gain, SMA Female connector PEWAN090-10SF](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Pasternack](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [A09-F8NF-M](#) [108-00016-050](#) [W1049B090](#) [WTL2449CQ1-FRSMM](#) [0600-00060](#) [GD53-25](#) [S9025PLSMF](#) [GPSCPMM00](#) [ANT-WP868SMA-Y](#) [CBNC58](#) [MD10-004](#) [ABFT](#) [LP800NMOW](#) [NMOQ88C](#) [NMOQB](#) [NMOQC](#) [ANT-GSMGPSPUKS](#) [60210](#) [60140](#) [ANT-8WPIG-UFL](#) [ANT-GPSPUKS](#) [A21H0](#) [29000863](#) [EXD450TN](#) [2.4GHz 2dBi-1.13-L=50mm](#) [3E0702BK-005](#) [22100003](#) [DL-T022-2.4G](#) [DL-T023-4G](#) [T1-915M](#) [DL-T021-2.4GW](#) [DL-T021-2.4G](#) [KH-IPEX-1.13](#) [BWGNSCNX16-6B1Y2L120](#) [BWGNSCNX15-15B1Y4L120](#) [DL-T023-4GW](#) [3N0401LG-021](#) [KHA\(RG1.13\)-TX90B-IPEX](#) [KHA\(RG1.13\)-TX80B-IPEX](#) [KH-137-TX90B-IPEX4](#) [KH-113-TX100B-IPEX4](#) [KH-113-TX60B-IPEX4](#) [KH-081-TX300-IPEX](#) [3K0001BK00-001](#) [3K0001BK00-002](#) [3N0401LG-038](#) [3N0401BK-049](#) [PRO-OB-440](#) [DL-F8-5G](#)