

### CHARGER SPECIFICATIONS

<b>Model No:</b> PC-150-12/750
<b>AC Input Range:</b> 110 VAC to 130 VAC; 60Hz
<b>Battery Charge Voltage:</b> <ul style="list-style-type: none"> <li>• Bulk charge voltage range: 10.0 to 14.0 VDC (1.66 to 2.33 VPC)</li> <li>• Absorption mode voltage range: 14.0 to 14.5 VDC (2.33 to 2.41 VPC)</li> <li>• Float mode voltage: 14.0 VDC (2.33 VPC)</li> </ul>
<b>Battery Charge Current:</b> <ul style="list-style-type: none"> <li>• Bulk charge current: 0.8 Amps</li> <li>• Absorption mode current: 0.75 to 0.25 Amps</li> </ul>
<b>Charger Power Out:</b> 12 Watts
<b>Battery Connection:</b> See compatible cable accessories
<b>Led Indicators:</b> <ul style="list-style-type: none"> <li>• Solid green LED - No battery connected, charger on</li> <li>• Solid yellow LED – Charging</li> <li>• Solid green LED – Battery connected, float charge mode</li> <li>• Solid red LED – Battery VDC less than 5.0VDC or connected in reverse</li> </ul>
<b>Weight:</b> 2.7 lbs. (1.2 Kg)
<b>Dimensions:</b> 5" x 3 1/2" x 2 1/2" H (13cm x 9cm x 6.5cm)
<b>Mounting:</b> 4 each #6 screws
<b>Recommended Battery Charging Temp:</b> 10° C to +27° C (50°F to +80°F)
<b>Operating Temp:</b> 0° C to +50° C (32°F to +122°F)
<b>Storage Temp:</b> -40° C to +70° C (-40°F to +158°F)
<b>Humidity:</b> 95% relative
<b>Color:</b> Black, anodized
<b>Exterior Housing:</b> Extruded aluminum body, polycarbonate end caps
<b>Harmonized Tariff Code:</b> 8504.40.9550

### TYPICAL APPLICATIONS

- Charges Lead Acid batteries
- Optimally designed for batteries up to 25 Ampere Hours

### KEY FEATURES

- Temperature compensation
- Three stage charger
- LED displays for charging status
- Single battery charger
- Unattended charging

### OPERATIONAL CHARACTERISTICS

- Three stages of operation
  - **Bulk charge mode** – replaces 80% of the charge to the battery from a discharged state – 6 hour time limit
  - **Absorption mode** – a tapering current replacing the final 20% of the charge to the battery – end current is a pre-programmed value
  - **Float mode** – maintains the battery's float voltage.


### COMPATIBLE CABLE ACCESSORIES

- **4005** Marine Polarized
- **4010** Motorcycle Ring
- **4020** Battery Clips
- **4030** Cigarette, Lighter Out


### CHARGES THE FOLLOWING BATTERIES

- Flooded/wet lead acid batteries
- Valve Regulated Lead Acid (VRLA) batteries
- GEL lead acid batteries

### CURRENT CURVE

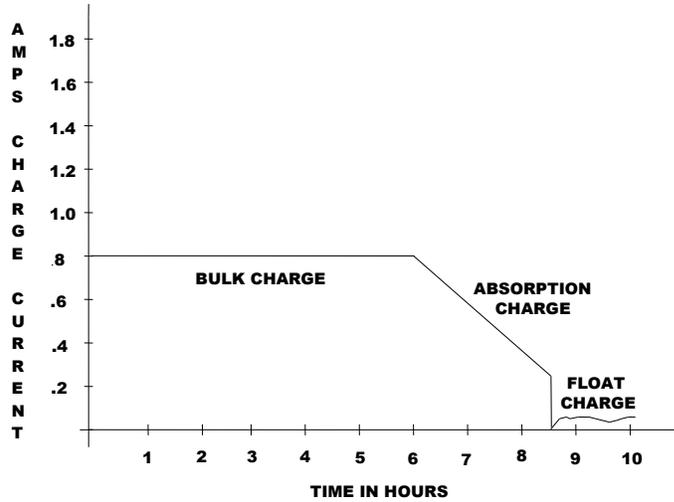

### VOLTAGE CURVE

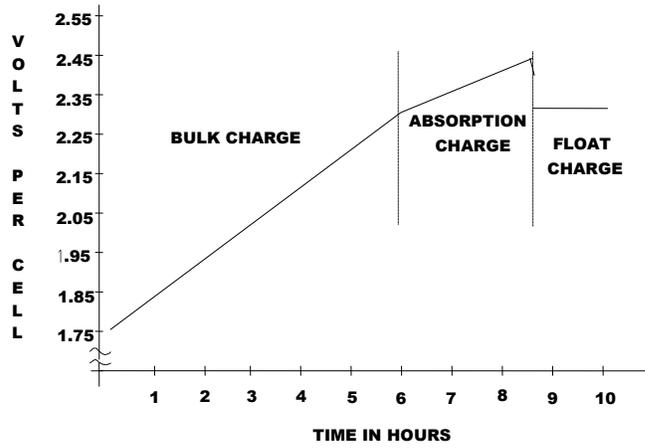

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [patco electronics](#) manufacturer:*

Other Similar products are found below :

[00-240031-02](#) [4020P](#) [3201P](#) [3201-750](#) [3212](#) [3202P](#) [4005](#)