

HC-TSC-B06-I-UT-F-CE - Contact insert



1541918
<https://www.phoenixcontact.com/us/products/1541918>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 6+PE, size: B6, Socket, Screw connection, 200 V, 16 A, 1.5 mm² ... 6 mm², with short-circuit function

Product description

Contact insert with short-circuit function. If the connector is pulled out, all contacts are short circuited.

Your advantages

- Halogen-free
- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial data

Item number	1541918
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	AF7ABC
GTIN	4067923014275
Weight per piece (including packing)	73.4 g
Weight per piece (excluding packing)	72 g
Customs tariff number	85366990
Country of origin	CN

Technical data

Notes

General	Please observe the circuit diagram
General	Use at least 1.5 mm ² cables with a maximum conductor loop of 2 m. No open conductor loops permitted!

Product properties

Product type	Contact insert with a fixed no. of positions
Type	B6
Number of positions	6
Connection profile	6+PE

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Mechanical characteristics

Contact diameter	2.5 mm
------------------	--------

Connection data

Connection technology

Connection technology	Screw connection
-----------------------	------------------

Conductor connection

Conductor cross section	1.5 mm ² ... 6 mm ²
Connection cross section AWG	16 ... 10
Tightening torque	1.2 Nm
Stripping length of the individual wire	10 mm

Electrical properties

Rated voltage (III/3)	200 V (when plugged in)
	20 V (Unplugged and during plugging)
Rated surge voltage	2.5 kV
Rated current	16 A (When plugged in)
	5 A (Unplugged and during plugging)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	>= 500
-----------------------------	--------

Material specifications

Flammability rating according to UL 94	V0
--	----

HC-TSC-B06-I-UT-F-CE - Contact insert



1541918

<https://www.phoenixcontact.com/us/products/1541918>

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

HC-TSC-B06-I-UT-F-CE - Contact insert


1541918

<https://www.phoenixcontact.com/us/products/1541918>




Drawings

Dimensional drawing

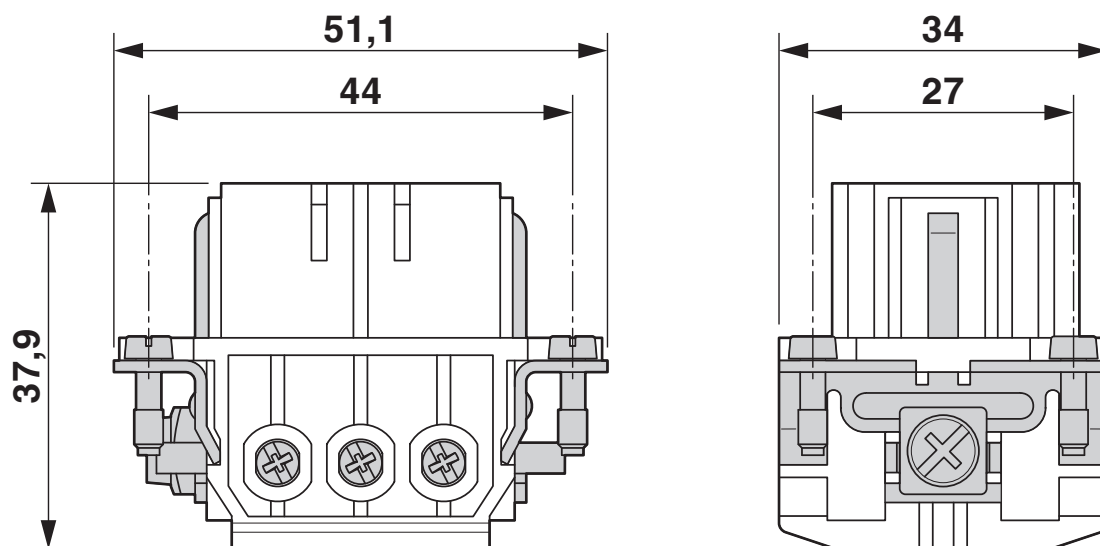

Female insert


Schematic diagram

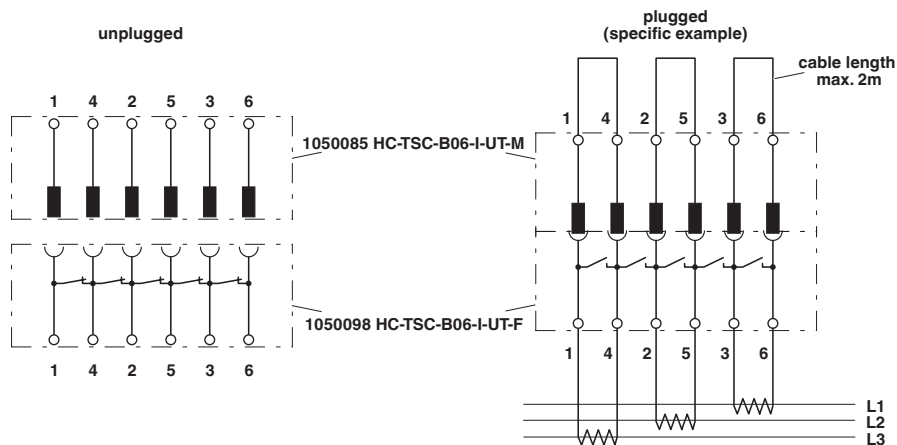

Circuit diagram

1541918

<https://www.phoenixcontact.com/us/products/1541918>

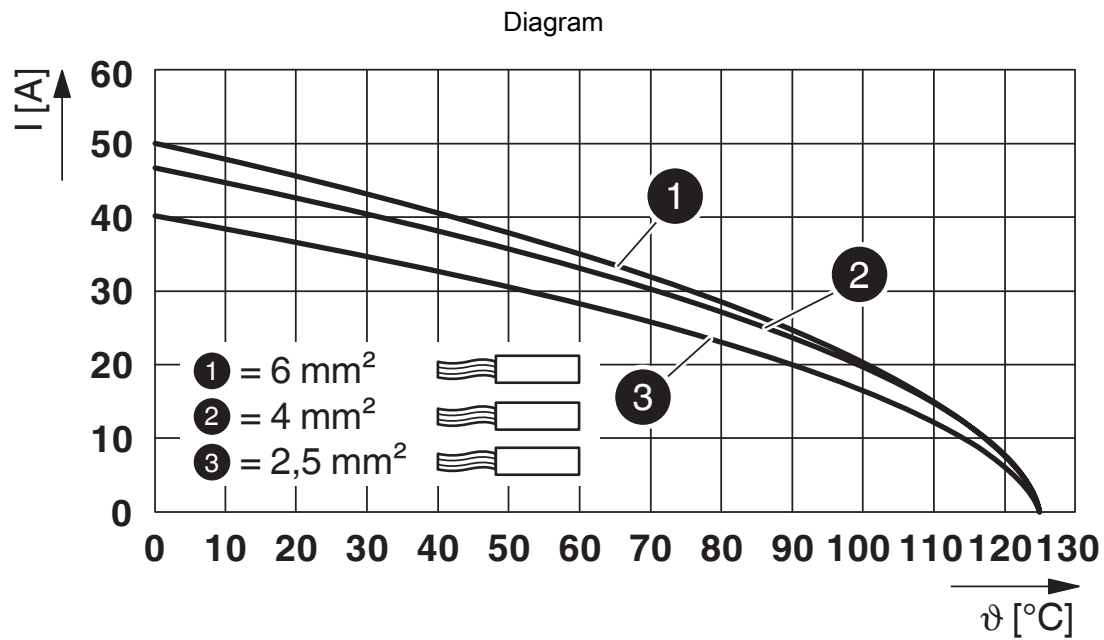

Derating diagram (mated)

HC-TSC-B06-I-UT-F-CE - Contact insert



1541918

<https://www.phoenixcontact.com/us/products/1541918>

Classifications

ECLASS

ECLASS-15.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) *category:*

Click to view products by [Phoenix Contact](#) *manufacturer:*

Other Similar products are found below :

[6646137-1](#) [6646138-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [73080254296](#) [73080255059](#) [7310205040001](#) [7487](#) [PS25/A0420/63](#)
[AN0024023](#) [1643543-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-3-BL-C240-](#)
[M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [C148 10A005 000 9](#) [2-1589900-8](#) [9300480317](#) [19000005132](#) [AN0024202](#) [AN0264023](#) [279-](#)
[0841-10100A](#) [281-0334-00100A](#) [419-2083-301](#) [078238-1613](#) [078238-2910](#) [078239-2912](#) [078239-2910](#) [078239-2911](#) [078239-2913](#)
[09370009946](#) [09305160521](#) [09370240318](#) [1-1104457-5](#) [5352I](#) [73000005327](#) [73000005329](#) [73080956756](#) [73080965056](#) [1926075-1](#)
[6646136-1](#) [6646979-1](#) [1103021-2](#) [NPDFT-3-BL-L-T6](#) [46562-1559](#)