

HC-M-01-CT-M-35 - Contact insert module



1544120

<https://www.phoenixcontact.com/us/products/1544120>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 1, power contacts: 1, control contacts: 0, Pin, Crimp connection, 830 V, 100 A, 10 mm² ... 35 mm², application: Power, without crimp contacts

Commercial data

Item number	1544120
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF62
Product key	AF7ACE
GTIN	4067923017313
Weight per piece (including packing)	14.4 g
Weight per piece (excluding packing)	13 g
Customs tariff number	85389099
Country of origin	DE

HC-M-01-CT-M-35 - Contact insert module



1544120

<https://www.phoenixcontact.com/us/products/1544120>

Technical data

Notes

General	For HEAVYCON housing design B6 to B48, HC-M-MHR... hinged retaining frame required, CK8,0-ED... crimp contacts (crimp contacts not supplied as standard)
General	Order crimp contacts separately

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
---------------	---

Product properties

Product type	Modular contact insert
Series	HC-M-01
Application	Power
Number of positions	1
Connection profile	1
Number of module slots	1
No. of power contacts	1
No. of control contacts	0
Contact material type	turned

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

Connection technology	Crimp connection
-----------------------	------------------

Conductor connection

Conductor cross section	10 mm ² ... 35 mm ² (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	8 ... 2 (The cross section specification refers to the geometric cross section of the cable used)

Dimensions

Width	34 mm
Height	58 mm
Length	15 mm

Mechanical characteristics

Minimum housing height	72 mm
Contact diameter	8 mm

HC-M-01-CT-M-35 - Contact insert module



1544120

<https://www.phoenixcontact.com/us/products/1544120>

Electrical properties

Rated voltage (III/2) contacts	1000 V
Rated voltage (III/3)	830 V
Rated surge voltage	8 kV
Rated current	100 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------


Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
-----------------------	---

Drawings

Diagram

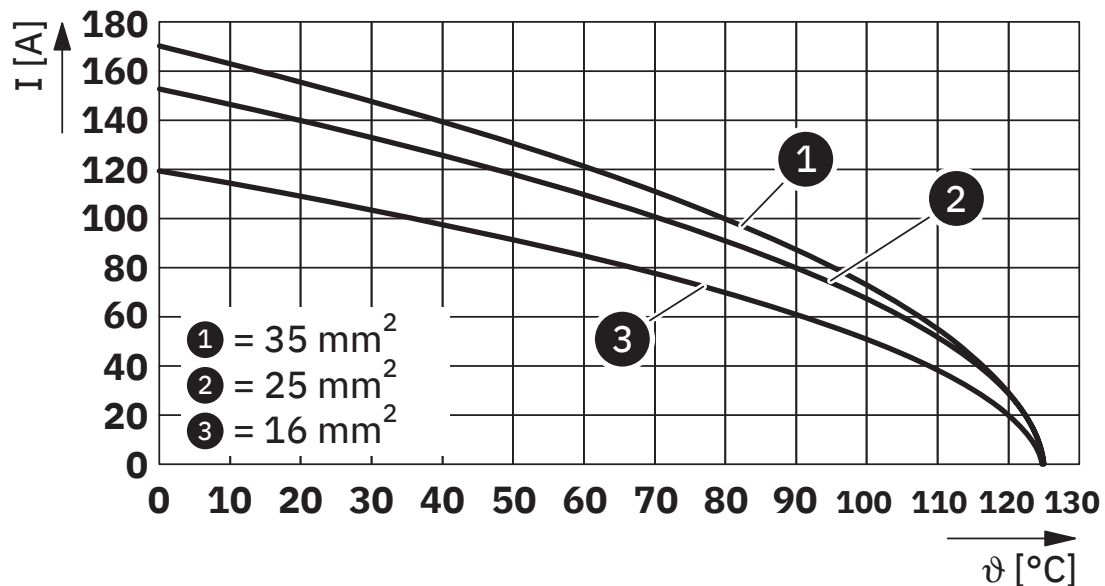

Derating diagram

HC-M-01-CT-M-35 - Contact insert module



1544120

<https://www.phoenixcontact.com/us/products/1544120>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1544120>

DNV Approval ID: TAE000037S				
---------------------------------------	--	--	--	--

 CSA Approval ID: 158887				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine				
	1000 V	100 A	- 2	-

 UL Recognized Approval ID: E468743				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine				
	1000 V	100 A	- 2	-

HC-M-01-CT-M-35 - Contact insert module



1544120

<https://www.phoenixcontact.com/us/products/1544120>

Classifications

ECLASS

ECLASS-13.0	27440217
ECLASS-15.0	27440217

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) ***category:***

Click to view products by [Phoenix Contact](#) ***manufacturer:***

Other Similar products are found below :

[6646137-1](#) [6646138-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [73080254296](#) [73080255059](#) [7310205040001](#) [7487](#) [PS25/A0420/63](#)
[AN0024023](#) [1643543-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-3-BL-C240-](#)
[M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [C148 10A005 000 9](#) [2-1589900-8](#) [9300480317](#) [19000005132](#) [AN0024202](#) [AN0264023](#) [279-](#)
[0841-10100A](#) [281-0334-00100A](#) [419-2083-301](#) [078238-1613](#) [078238-2910](#) [078239-2912](#) [078239-2910](#) [078239-2911](#) [078239-2913](#)
[09370009946](#) [09305160521](#) [09370240318](#) [1-1104457-5](#) [5352I](#) [73000005327](#) [73000005329](#) [73080956756](#) [73080965056](#) [1926075-1](#)
[6646136-1](#) [6646979-1](#) [1103021-2](#) [NPDFT-3-BL-L-T6](#) [46562-1559](#)