

CK6,0-ED-25,00F AG - Crimp contact



1682092

<https://www.phoenixcontact.com/us/products/1682092>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Crimp contact, series: HC-M-...-25, Socket, turned, contact diameter: 6 mm, connection cross section: 25 mm² ... 25 mm², AWG 4...4 , contact material: Cu alloy

Commercial data

Item number	1682092
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF65
Product key	AF7AIF
GTIN	4067923236790
Weight per piece (including packing)	10 g
Weight per piece (excluding packing)	9.9 g
Customs tariff number	85366990
Country of origin	DE

CK6,0-ED-25,00F AG - Crimp contact

1682092

<https://www.phoenixcontact.com/us/products/1682092>



Technical data

Notes

General	HC-M-...-25 contact carrier, HC-DCC4-I-CT-HW-F
Assembly note	The quality of a crimp connection is determined by DIN EN 60352-2.
Assembly note	The contacts are qualified for crimping dies in accordance with DIN 46235. Klauke, for example, offers an appropriate tool: Crimping dies from the D22 series are required for the EKM6022 battery-powered hydraulic crimping pliers. Due to the narrow crimping width of 5 mm, it is very important to make two compressions next to one another. For the EK12042 model, crimping dies from the HD13 series are required. Due to a wider crimping process, only one compression is required.

Product properties

Product type	Crimp contact
Series	HC-M-...-25
Contact material type	turned

Connection data

Connection technology

Contact connection type	Socket
Connection method	Crimp connection


Conductor connection

Stripping length	15.5 mm
Connection cross section	25 mm ² ... 25 mm ²
Connection cross section AWG	4 ... 4

Material specifications

Material Contact	Cu alloy (lead-free)
Material Contact surface	Ag

Dimensions

Dimensional drawing	
Length [l]	31.5 mm
Diameter (Contact diameter)	6 mm

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

CK6,0-ED-25,00F AG - Crimp contact



1682092

<https://www.phoenixcontact.com/us/products/1682092>

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

CK6,0-ED-25,00F AG - Crimp contact


1682092

<https://www.phoenixcontact.com/us/products/1682092>



Drawings

Dimensional drawing

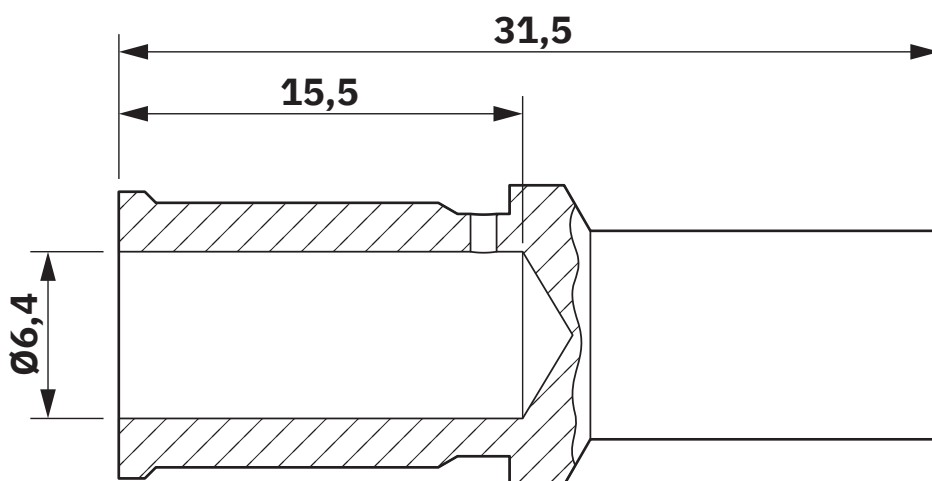

Dimensional drawing

CK6,0-ED-25,00F AG - Crimp contact



1682092

<https://www.phoenixcontact.com/us/products/1682092>

Classifications

ECLASS

ECLASS-13.0	27440204
ECLASS-15.0	27440204

ETIM

ETIM 9.0	EC000796
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Heavy Duty Power Connectors](#) ***category:***

Click to view products by [Phoenix Contact](#) ***manufacturer:***

Other Similar products are found below :

[6646137-1](#) [6646138-1](#) [6646940-1](#) [6651091-1](#) [6651525-1](#) [6651529-1](#) [73080254296](#) [73080255059](#) [7310205040001](#) [7487](#) [PS25/A0420/63](#)
[AN0024023](#) [1643543-1](#) [1791340000](#) [NLDFT-3-BL-L-S120-M40A](#) [NLDFT-N-W-L-C240-M40B](#) [NLS-2-R-C240-M40B](#) [NLS-3-BL-C240-](#)
[M40B](#) [NLS-N-W-C240-M40B](#) [NPS-3-BL-T6](#) [C148 10A005 000 9](#) [2-1589900-8](#) [9300480317](#) [19000005132](#) [AN0024202](#) [AN0264023](#) [279-](#)
[0841-10100A](#) [281-0334-00100A](#) [419-2083-301](#) [078238-1613](#) [078238-2910](#) [078239-2912](#) [078239-2910](#) [078239-2911](#) [078239-2913](#)
[09370009946](#) [09305160521](#) [09370240318](#) [1-1104457-5](#) [5352I](#) [73000005327](#) [73000005329](#) [73080956756](#) [73080965056](#) [1926075-1](#)
[6646136-1](#) [6646979-1](#) [1103021-2](#) [NPDFT-3-BL-L-T6](#) [46562-1559](#)