

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Primary-switched ESSENTIAL edition power supply for DIN rail mounting, input: 1-phase, output: 24 V DC / 480 W

Your advantages

- Worldwide use thanks to the wide range input and international approval package
- Fast installation, thanks to easy DIN rail mounting
- Greater availability, thanks to fanless convection cooling

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Technical data

Input data

AC operation

Nominal input voltage range	100 V AC ... 240 V AC
Input voltage range	85 V AC ... 264 V AC
Derating	< 100 V (1 %/V)
Input voltage range AC	85 V AC ... 264 V AC
Input voltage range DC	120 V DC ... 375 V DC
Voltage type of supply voltage	AC
Inrush current	typ. 40 A (115 V AC) typ. 80 A (230 V AC)
AC frequency range	47 Hz ... 63 Hz
Mains buffering time	typ. 10 ms (115 V AC) typ. 16 ms (230 V AC)
Current consumption	5.4 A (115 V AC) 2.7 A (230 V AC)
Nominal power consumption	523.27 VA
Protective circuit	Transient surge protection; Varistor
Typical response time	1000 ms
Input fuse	10 A (fast blow, internal)
Discharge current to PE	< 1 mA (264 V AC)

Output data

Efficiency	85 % (115 V AC)
	88 % (230 V AC)
Output characteristic	HICCUP
Nominal output voltage	24 V DC ± 2 %
Setting range of the output voltage (U_{Set})	22 V DC ... 28 V DC (max. power ≤ 480 W)
Nominal output current (I_N)	20 A
Derating	> 40 °C (1.67 % / °C, 115 V AC)
	> 50 °C (2.5 % / °C, 230 V AC)
Max. capacitive load	8000 μ F
Active current limitation	109% - 130% of the max. output power (in the event of short circuit)
Control deviation	≤ 1 % (change in load, static 10 % ... 90 %)
	typ. ± 2 % (change in load, dynamic 10 % ... 90 %)
	< 0.1 % (change in input voltage ± 10 %)
Residual ripple	< 120 mV _{pp} (-10 °C ... +70 °C)
	< 240 mV _{pp} (-20 °C ... -10 °C)
Output power	480 W
Maximum no-load power dissipation	5 W (115 V AC)
	4 W (230 V AC)

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit

2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Power loss nominal load max.	50 W (115 V AC)
	40 W (230 V AC)

Connection data

Input	
Connection method	Screw connection
Conductor cross section AWG min.	16
Conductor cross section AWG max.	12
Stripping length	7 mm

Output	
Connection method	Screw connection
Conductor cross section AWG min.	16
Conductor cross section AWG max.	12
Stripping length	7 mm

Signaling

Types of signaling	LED
Operating voltage display	Green LED

Signal output	
Status display	"DC OK" LED green

Electrical properties


Number of phases	1.00
Insulation voltage input/output	3 kV AC
Insulation voltage output / PE	0.5 kV AC
Insulation voltage input / PE	2 kV AC

Product properties

Product type	Power supply
Product family	ESSENTIAL edition
MTBF (Telcordia SR-332)	> 700000 h

Insulation characteristics	
Protection class	I (with PE connection)
Degree of pollution	2

Dimensions

Dimensional drawing	
---------------------	--

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Width	85.5 mm
Height	123.6 mm
Depth	128.5 mm

Installation dimensions

Installation distance right/left	10 mm / 10 mm (100 V AC, up to 90% load)
Installation distance top/bottom	50 mm / 50 mm (100 V AC, up to 90% load)

Mounting

Mounting type	DIN rail mounting
With protective coating	No

Material specifications

Housing material	Metal
Housing material	Aluminum
Type of housing	Steel sheet, zinc-plated
Side element version	Aluminum

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 5000 m (> 2000 m, Derating: 10 %/1000 m)
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)
Shock	IEC 60068-2-27, 27, half sinusoidal wave: 50g for 11 ms; 3x per direction, 9x overall
Vibration (operation)	IEC 60068-2-6, sinusoidal waves: 10 Hz ... 500 Hz, 19,6 m/s ² (2g peak), 10 min. per cycle, 60 min. in the X direction

Standards and regulations

Standard - Electrical safety	EN 60950-1
Standard – Safety extra-low voltage	EN 60950-1 (SELV)
Approval - requirement of the semiconductor industry with regard to mains voltage dips	SEMI F47 - 0706 (200 V AC)

Approvals

CSA	CSA-C22.2 Nr. 107.1-01
	CSA-C22.2 Nr. 60950-01
UL approvals	UL/C-UL listed UL 508

Conformity/Approvals

SIL in accordance with IEC 61508	0
----------------------------------	---

EMC data

Low Voltage Directive	Conformance with Low Voltage Directive 2014/35/EC
-----------------------	---

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit

2910588
<https://www.phoenixcontact.com/pl/produkty/2910588>

EMC requirements for noise emission	EN 61000-6-3
	EN 61000-6-4
EMC requirements for noise immunity	EN 61000-6-1
	EN 61000-6-2
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise emission	EN 55011 (EN 55022) Class B
Emitted interference	
Standards/regulations	EN 61000-6-3

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit




2910588


<https://www.phoenixcontact.com/pl/produkty/2910588>

Drawings

Diagram

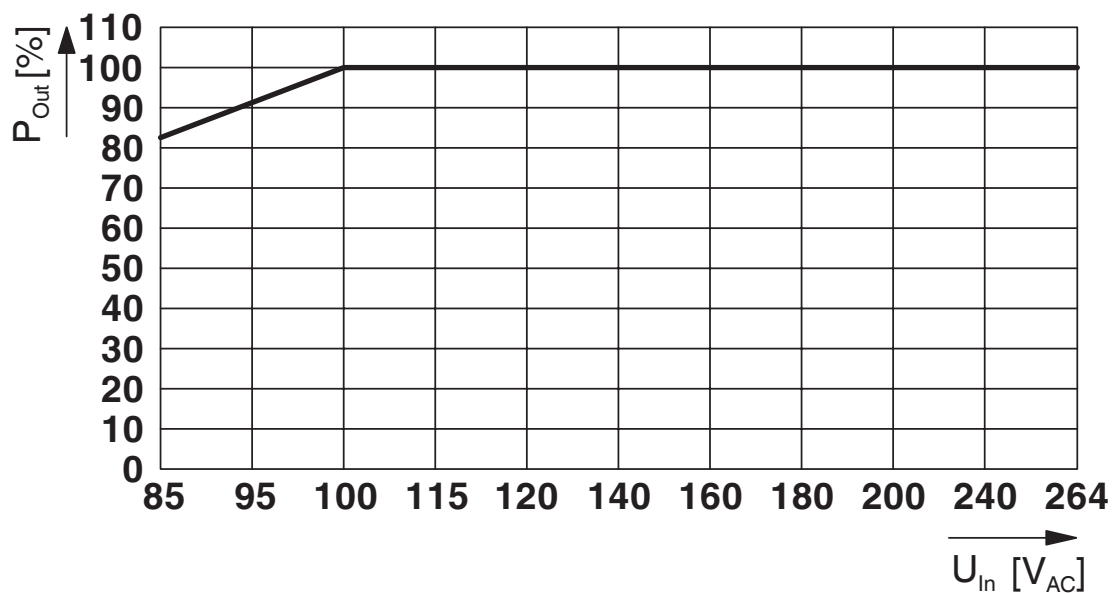

Dimensional drawing

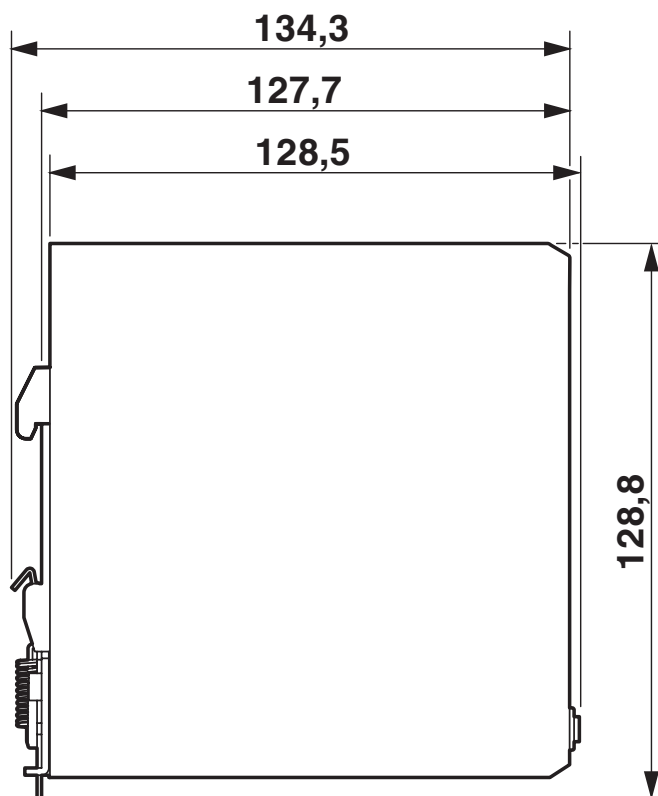


ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588
<https://www.phoenixcontact.com/pl/produkty/2910588>

Schematic diagram

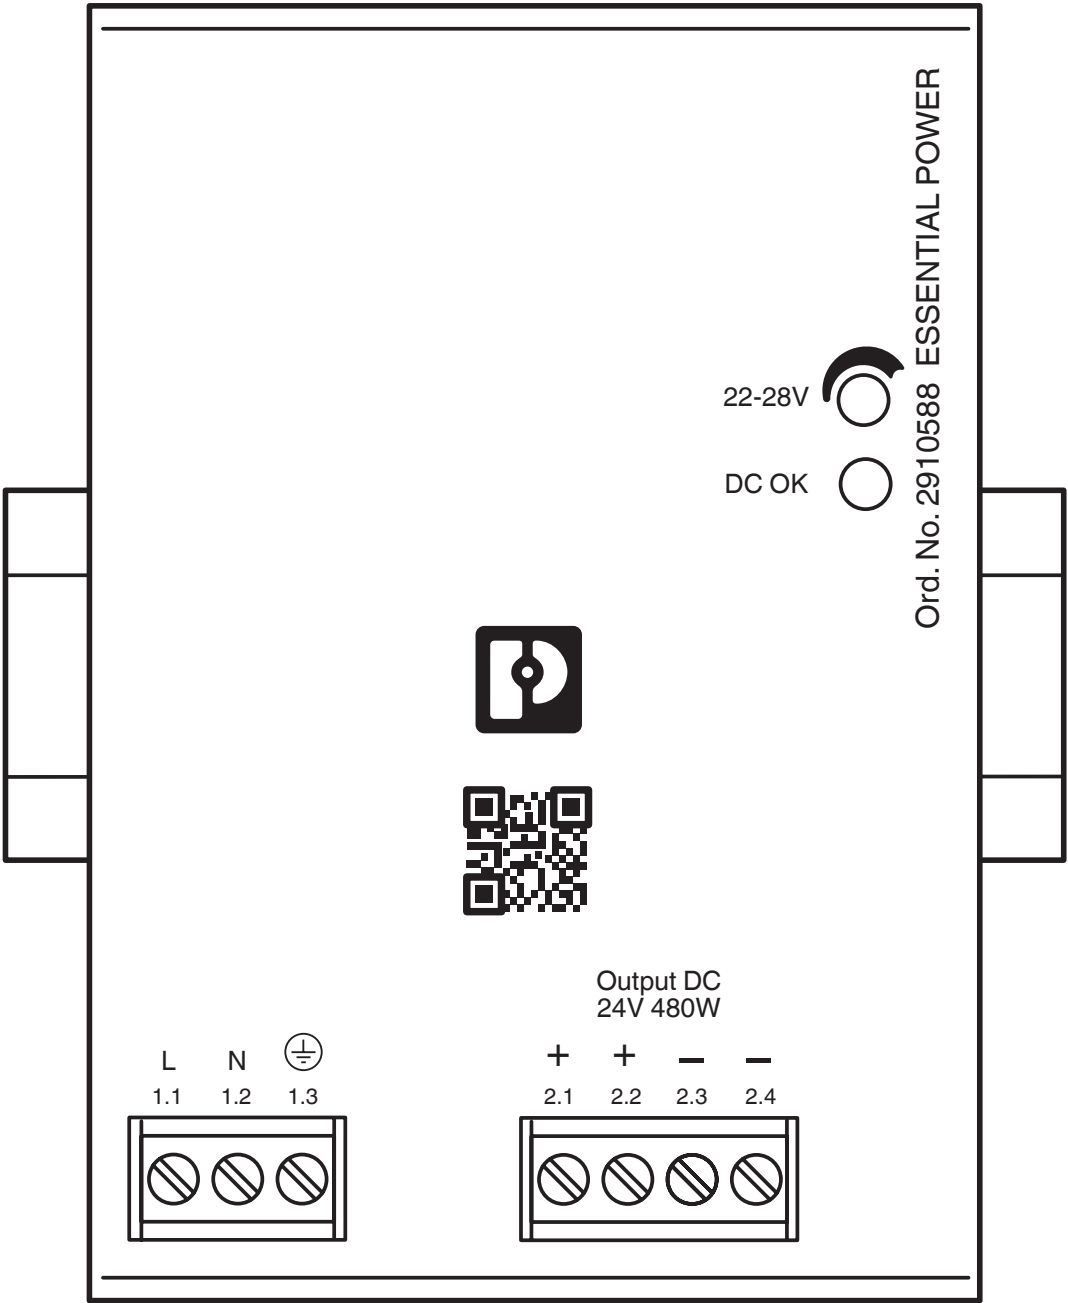


ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit




2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Dimensional drawing

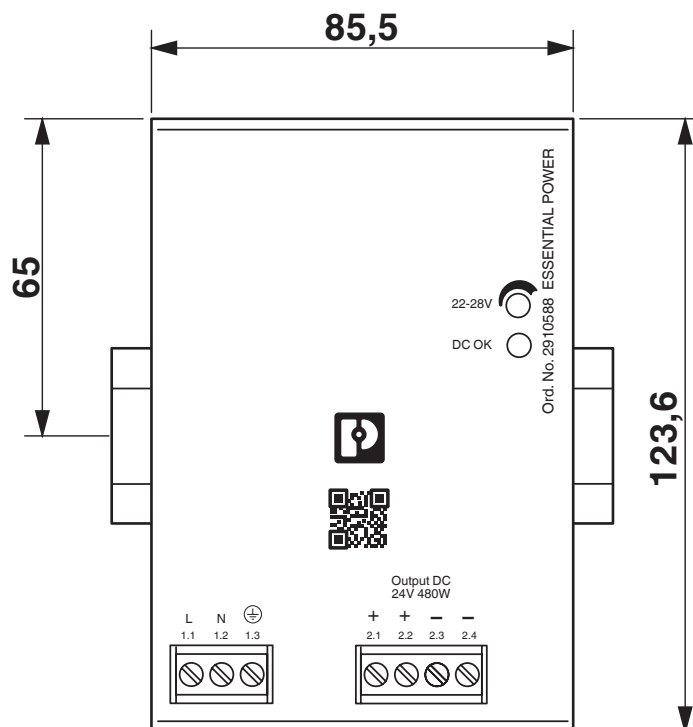

Block diagram

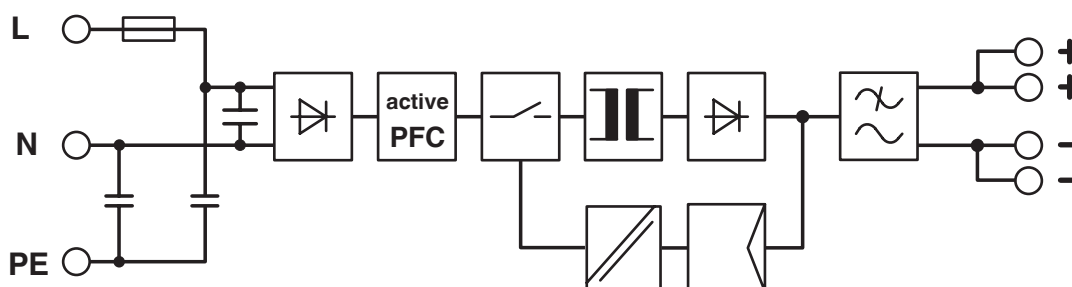


ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Diagram

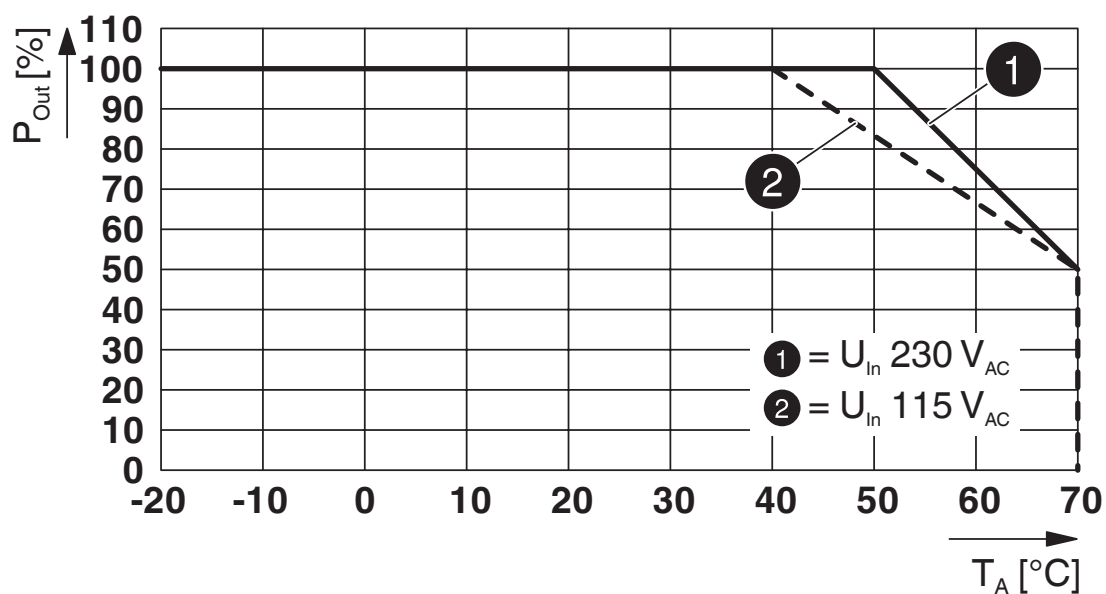

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pl/produkty/2910588>



cULus Listed

Approval ID: E211944-20170721



cULus Listed

Approval ID: E123528-20170721

ESSENTIAL-PS/1AC/24DC/480W/EE - Power supply unit



2910588

<https://www.phoenixcontact.com/pl/produkty/2910588>

Classifications

ECLASS

ECLASS-11.0	27040701
ECLASS-13.0	27040701
ECLASS-12.0	27040701

ETIM

ETIM 8.0	EC002540
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

2910588
<https://www.phoenixcontact.com/pl/produkty/2910588>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Sp. z o.o.
ul. Bierutowska 57-59, Budynek nr 3/A
51-317 Wrocław
71/ 39 80 410
pxcpl@phoenixcontact.pl

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) ***category:***

Click to view products by [Phoenix Contact](#) ***manufacturer:***

Other Similar products are found below :

[DVP01PU-S](#) [DVPPS01](#) [DVPPS02](#) [ADNB040-24-1PM-C](#) [SS14011524](#) [PSC-6024](#) [PS-C12024](#) [PSC-2024](#) [96PSD-A40W24-MM](#) [PSD-A120W12](#) [NDR-7524](#) [787-1200.](#) [AMED75-48SJZ](#) [1SVR427043R1200](#) [50995](#) [50903](#) [EL50-D](#) [18924-9989](#) [50996](#) [HDN-3024](#) [ISED-120-24](#) [1335699](#) [1335698](#) [SPM3051](#) [POS DIN30W24](#) [SPB-015-12](#) [EL50-B](#) [50905](#) [DRB240-48-1](#) [DRS-480-48](#) [POS DIN30W15](#) [POS MDIN60W12](#) [18924-9988](#) [HDN-3012](#) [DRB480-48-3-A1](#) [CFM50S240-SD](#) [DRB480-24-3-A0](#) [DRB240-24-3-A0](#) [DRB480-72-3-A1](#) [DRB480-72-3-A0](#) [POS DIN60W24](#) [XCSD1030W012VAA](#) [DRB120-12-3-A1](#) [POS DIN60W15](#) [CFM70S050-SD](#) [DRB960-24-3-A0](#) [50904](#) [SPB-030-12](#) [DRB480-48-3-A0](#) [DRB960-24-3-A1](#)