

Line laser, red, 635 nm, 42 °, 5 mW

LI635-5-3(8x26)42-F1500
Order Number: 70107593

Main Parameters (*)	min	typ	max	Unit
Wavelength		635		nm
Optical Output Power		5		mW
Operating Voltage	2.85	3	3.3	V DC
Operating Current	30	55	85	mA
Operating Temperature	-20		50	°C
Storage Temperature	-40		80	°C

Main Data

Warranty 1 years

Technical Parameters

Lifetime > 10,000 h
RoHS yes

Optical Parameters

Beam Shape Line
Laser Class 1
Divergence 1 - 1.5 mrad
Fan Angle 42 °
Line Thickness <1.5mm@1.5m
Operating Distance 1.5 m
Optics glass lens AR coated
Laser technology diode
Focus fixed (1500mm)

Electrical Parameters

Potential of Housing isolated
Power Supply LFNT-3

Mechanical Parameters

Size Ø8x26 mm
Material aluminium
Cable length 100 mm
Output Aperture 3 mm
Weight 4 g


(*) Over the complete operating temperature range

Features



- Fan angle 42 °
- Laser Class 1
- Operating Voltage 3 V DC
- Uniform line thickness
- Image processing


Picture



Cable color

Ground		blue	GND
Positive		red	2.85 - 3.3, typ 3 V DC

Drawing

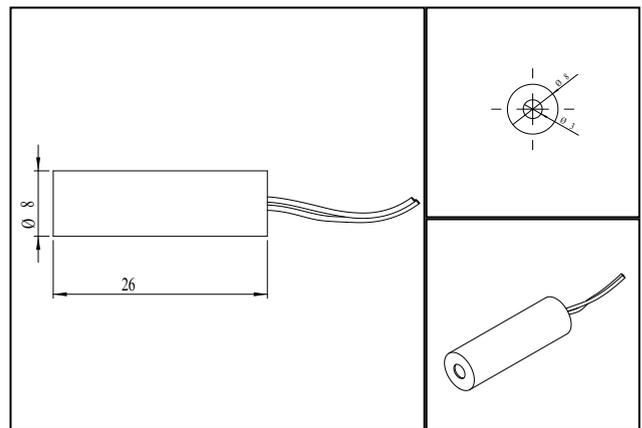

Safety Label



Valid Revision

17 | 11-FEB-2021

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Lasers](#) category:

Click to view products by [PICOTRONIC](#) manufacturer:

Other Similar products are found below :

[5113220008](#) [70121582](#) [70115499](#) [511322-0009](#) [511322-0005](#) [511322-0014](#) [70100037](#) [70101690](#) [70103069](#) [70103380](#) [70103786](#) [70103977](#)
[70103984](#) [70104004](#) [70104011](#) [70104349](#) [70105025](#) [70105032](#) [70105056](#) [70105094](#) [70105322](#) [70105506](#) [70105612](#) [70105643](#) [70105711](#)
[70105735](#) [70105797](#) [70105803](#) [70105964](#) [70106190](#) [70106596](#) [70106664](#) [70106848](#) [70106954](#) [70107241](#) [70107425](#) [70107586](#) [70108477](#)
[70108507](#) [70108552](#) [70108880](#) [70108927](#) [70109634](#) [70109849](#) [70109986](#) [70110227](#) [70110524](#) [70112641](#) [70112764](#) [70113303](#)