


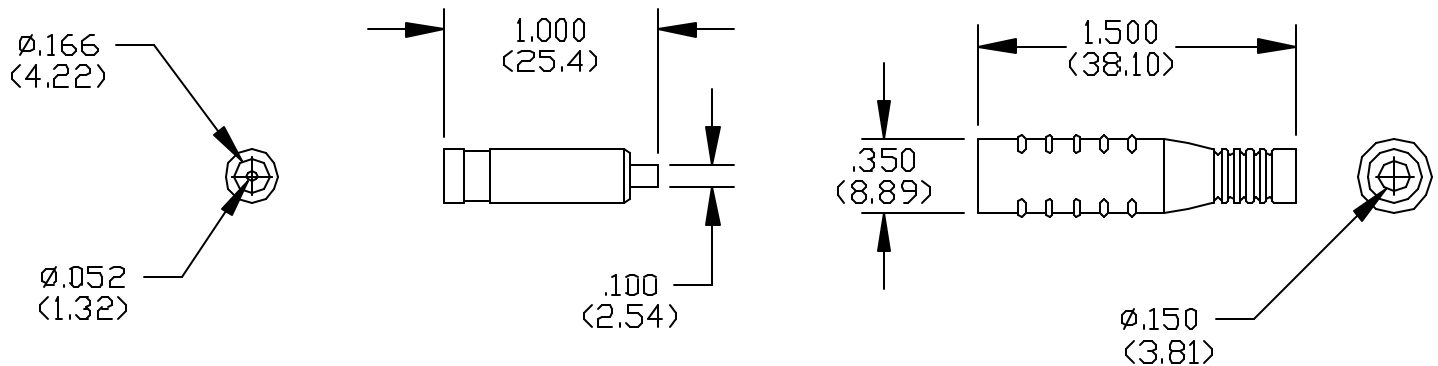

FEATURES:

- This in-line banana jack is ideal for making patch cords and field repairs.
- A snap-on two piece design allows the wire to be crimped or soldered to the banana jack
- Part will accept 18, 20, 22 AWG wire, crimp or solder connection.
- Use with Model #5169 to build a custom extension cable.

MATERIALS:

Body: Brass per QQ-B-626, Alloy 360, ½ Hard.

Insulation: Flexible PVC.

Marking: "POMONA"

Finish: Body – Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

RATINGS: (Independent of Wire)

Operating Temperature: +50°C.(+122°F.) Max.

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 5000 WVDC Max.

Current: 15 Amperes

ORDERING INFORMATION: Model 5167-*

*= Color, -0 Black, -2 Red

Ordering Example: 5167-0, Color is Black

Other colors available on special request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[01-2604-4-0212](#) [01-2368-1-02](#) [01-2606-5-0212](#) [M39024/11-09G](#) [M39024/11-42](#) [M39024/12-08](#) [707-5402-01-19](#) [707-5410](#) [R948161000](#)
[1659559](#) [1659567](#) [1663921](#) [1663939](#) [1696-102](#) [174-R825B-EX](#) [1905509](#) [1905527](#) [1914916](#) [211-101](#) [RS100GBL](#) [RS250GBL](#) [251-102](#) [25-](#)
[2251-2-03](#) [25-2259-2-03](#) [923743-28-I](#) [2854-BLU](#) [2970-BLK](#) [30-443G](#) [1909861](#) [1916466](#) [1918007](#) [1919515](#) [1920271](#) [1929125](#) [1933440](#)
[1938303](#) [1944375](#) [204-103](#) [2079](#) [2435108](#) [2803-102](#) [30-442G](#) [R644543002](#) [R644543003](#) [R644543004](#) [R644543020](#) [R644543021](#)
[R948160000](#) [31-416-0](#) [319-BLK](#)