

# POS09100A-H series

9V / 1A Wall mounted type AC/DC adaptor



## ■ Features:

- Universal AC input / Full range
- ErP step II / CEC level VI compliance
- No load power consumption  $P < 0.075W$
- Protections: Overload / Short circuit / Over Voltage



## ELECTRICAL SPECIFICATION



MODEL	POS 09100A-H
-------	--------------

## OUTPUT

Rated Voltage	9V
Rated Current	1A
Current Range	0 ÷ 1A
Rated Power	9W
Line Regulation	± 1%
Load Regulation	± 5%
Tolerance [3]	± 8%
Ripple & Noise (max.) [2]	150mV <sub>p-p</sub>
Setup, Rise Time [4]	5000ms, 30ms / 230VAC at full load
Hold up Time (typ.)	4ms / 230VAC at full load

## INPUT

Voltage Range	90 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	81.01%
AC Current (typ.)	0.2A / 230VAC
No load Power Consumption (max.)	0.075W

## PROTECTIONS

Overload	Range: 105-200% Auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over Voltage	Type: auto-recovery.

# POS09100A-H series

9V / 1A Wall mounted type AC/DC adaptor



## WORKING ENVIRONMENT

<b>Working Temperature</b>	0°C ÷ 40°C
<b>Working Humidity</b>	5 ÷ 90% RH non-condensing
<b>Storage Temperature and Humidity</b>	-20°C ÷ 85°C, 5 ÷ 90% RH non-condensing


## SAFETY and EMC REGULATIONS

<b>Safety Standards</b>	Compliance to EN 62368
<b>Withstand Voltage</b>	IN/OUT: 3.6kVAC
<b>Isolation Resistance</b>	IN/OUT: 50MΩ/500VDC/25°C/70%
<b>EMC Emission</b>	Compliance to EN55032
<b>EMC Immunity</b>	Compliance to EN61000-4-2, -3, -4, -5
<b>Harmonic Current</b>	Compliance to EN61000-3-3; EN61000-3-2

## OTHERS

<b>DC wire and plug</b>	Wire: 24AWG*2C, length = 1500mm	Plug: 2.1/5.5
<b>Net Weight / Dimensions</b>	68g / 56.5 x 36 x 25mm (L x W x H)	

## MECHANICAL SPECIFICATION

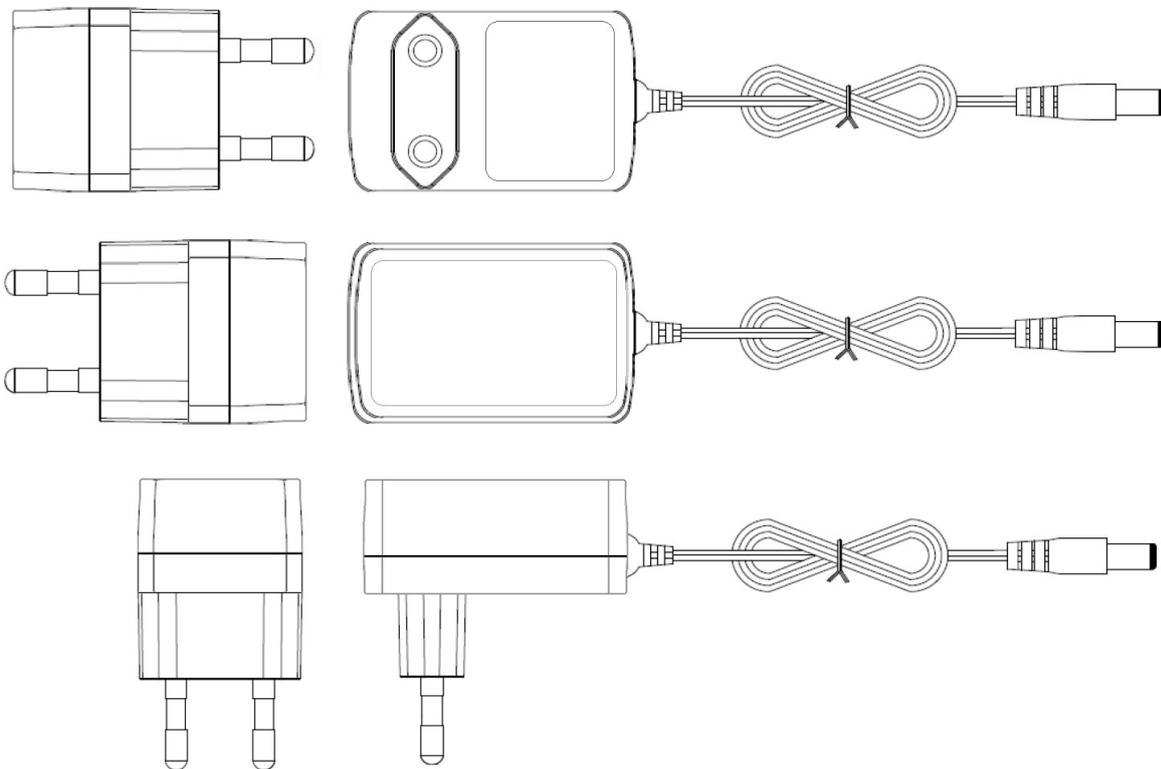


# POS09100A-H series

9V / 1A Wall mounted type AC/DC adaptor



## MECHANICAL SPECIFICATION: DC wire and plug

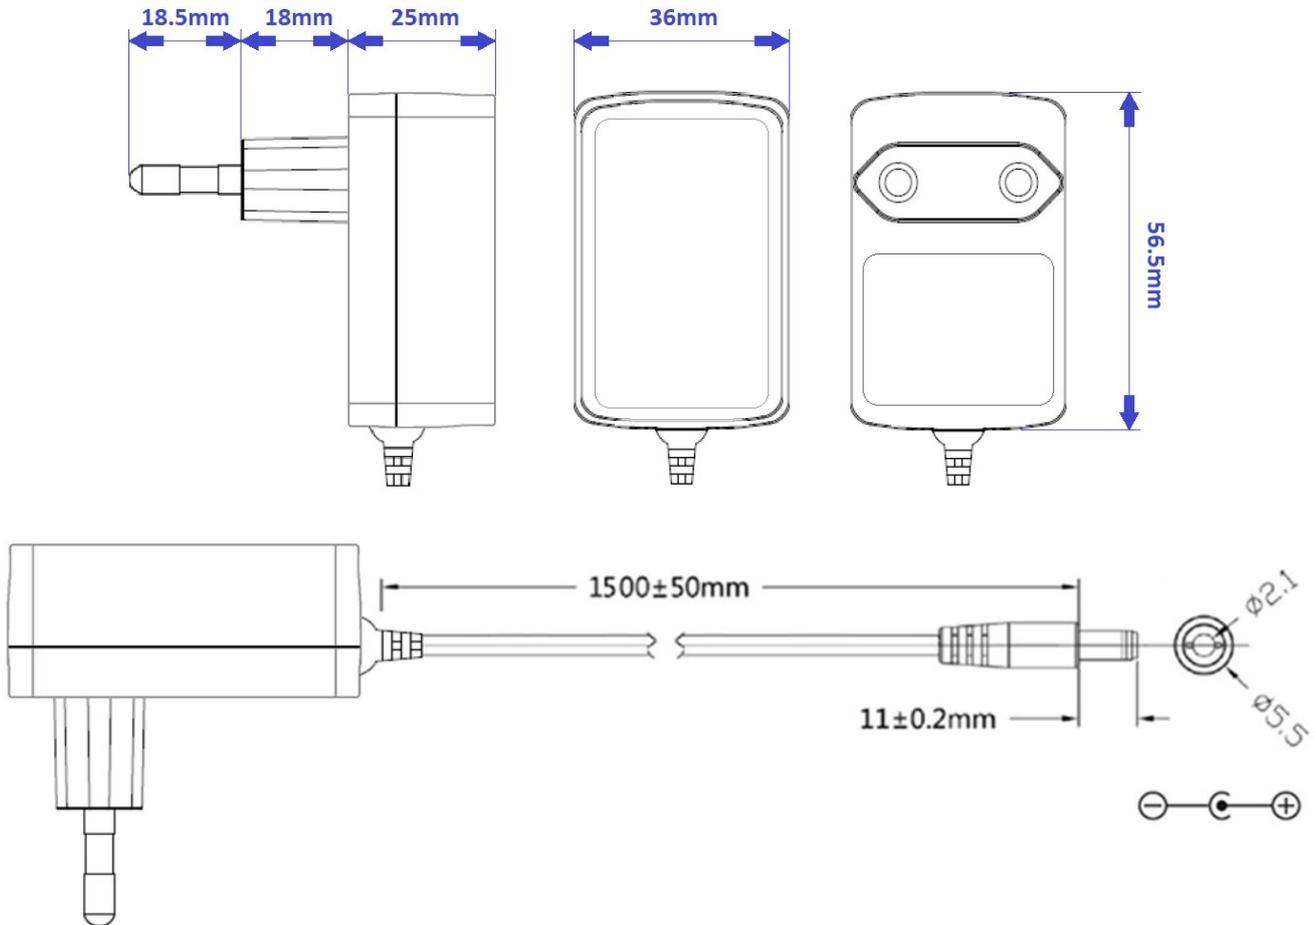

MODEL	DC PLUG	X [mm]	Y [mm]	Polarity
POS09100A	5.5x2.1mm	5.5	2.1	center positive
POS09100A-2555	5.5x2.5mm	5.5	2.5	center positive
POS09100A-1335	3.5x1.3mm	3.5	1.3	center positive
POS09100A-1740	4.0x1.7mm	4.0	1.7	center positive
POS09100A-1748	4.8x1.7mm	4.8	1.7	center positive
POS09100A-CN	5.5x2.1mm	5.5	2.1	center negative
POS09100A-2555-CN	5.5x2.5mm	5.5	2.5	center negative
POS09100A-1335-CN	3.5x1.3mm	3.5	1.3	center negative
POS09100A-1740-CN	4.0x1.7mm	4.0	1.7	center negative
POS09100A-1748-CN	4.8x1.7mm	4.8	1.7	center negative

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wall Mount AC Adapters](#) category:*

*Click to view products by [POS](#) manufacturer:*

Other Similar products are found below :

[ADP-163 E](#) [ADP-159 A](#) [WSU075-1000-R13](#) [WSU120-2000-13](#) [WSU090-2500-13](#) [WSU240-1000-13](#) [WSU150-0560-13](#) [WSU240-0500-R13](#)  
[WSU050-3000-13](#) [WSU120-1500-13](#) [WSU150-1200-13](#) [WSU120-1500-R13](#) [WSU240-0750-13](#) [WSU240-1500-13](#) [WSU090-1300-13](#)  
[WSU050-1500-13](#) [WSU090-0800-13](#) [WSU120-0700-13](#) [WSU120-3000-13](#) [WSU090-1300-R13](#) [WSU050-4000-13](#) [AC PLUG-AU3](#) [AC](#)  
[PLUG-MIX3](#) [223-00011](#) [223-00012](#) [BB-SMI6B12V-P230C1](#) [POSC05200A-0723-WH](#) [POSC05200A-1335-WH](#) [POSC05200A-1740](#)  
[POSC05200A-CN-WH](#) [POSC12100A-0723](#) [POSC12100A-1335-WH](#) [POSC12125A-WH](#) [POSC12200A-H-1335](#) [POS05200A-WH-USB-C](#)  
[POSC06100A-1335-WH](#) [POSC06100A-1335L-WH](#) [POSC09100A-0723](#) [POSC09100A-1335](#) [POSC09100A-CNL](#) [POSC12125A-CN](#) [BB-](#)  
[SMI6B-12-V-ST](#) [POSC24100A-WH](#) [POSC24100A-H-2555-WH](#) [65556](#) [65408](#) [POSC24100A-2555-WH](#) [POSB05200A-WH](#) [65404](#) [50765](#)