

POSC09150A series

9V / 1.5A Wall mounted type AC/DC adaptor



■ Features:

- Universal AC input / Full range
- ErP step II / CEC level VI compliance
- MTBF > 100.000 h
- Protections: Overload / Short circuit / Over Voltage



ELECTRICAL SPECIFICATION

MODEL	POSC09150A
-------	------------

OUTPUT

Rated Voltage	9V
Rated Current	1.5A
Current Range	0 ÷ 1.5A
Rated Power	13W
Line Regulation	± 5%
Load Regulation	± 5%
Tolerance [3]	± 8%
Ripple & Noise (max.) [2]	200mV _{p-p}
Rise Time [4]	Max 100ms / 230VAC
Hold up Time (typ.)	3ms / 230VAC at full load

INPUT

Voltage Range	90 ÷ 264VAC
Frequency Range	47 ÷ 63Hz
Efficiency (typ.)	83.59% - Input115/230Vac / Average (25%+50%+75%+100%) /4
AC Current (typ.)	0.6A / 230VAC
No load Power Consumption (max.)	<0.10W

PROTECTIONS

Overload	1.65A-2.7A Auto-recovery.
Short Circuit	Type: hiccup mode, auto-recovery.
Over Voltage	Type: auto-recovery.

POSC09150A series

9V / 1.5A Wall mounted type AC/DC adaptor



WORKING ENVIRONMENT

Working Temperature	-5°C ÷ 40°C
Working Humidity	5 ÷ 95% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ 85°C, 5 ÷ 90% RH non-condensing


SAFETY and EMC REGULATIONS

Safety Standards	Compliance to EN 62368-1
Withstand Voltage	IN/OUT: 3.6kVAC
Isolation Resistance	IN/OUT: 50MΩ/500VDC/25°C/70%
EMC Emission	Compliance to EN55032
EMC Immunity	Compliance to EN61000-4-2, -3, -4, -5
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS

DC wire and plug	Wire: 24AWG*2C, length = 1500mm	Plug: 2.1/5.5mm
Net Weight / Dimensions	78g / 56.0 x 28.0 x 42.0mm (L x W x H)	

MECHANICAL SPECIFICATION

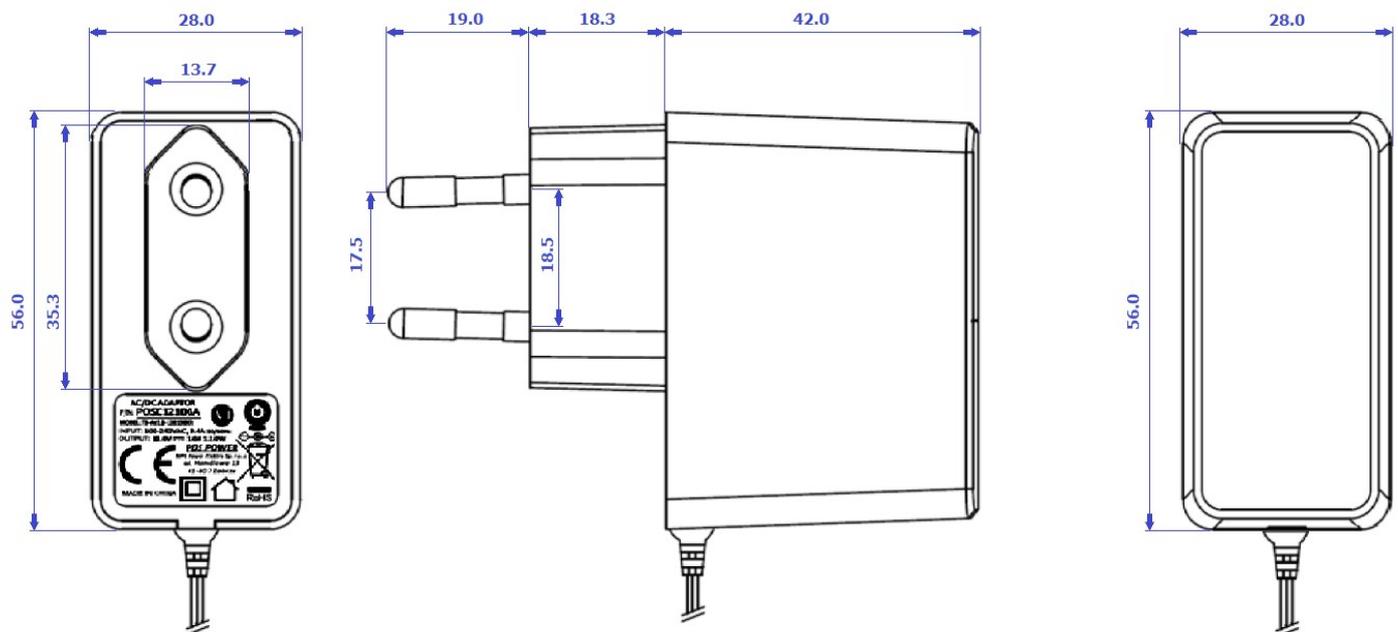


POSC09150A series

9V / 1.5A Wall mounted type AC/DC adaptor



MECHANICAL SPECIFICATION: DC wire and plug

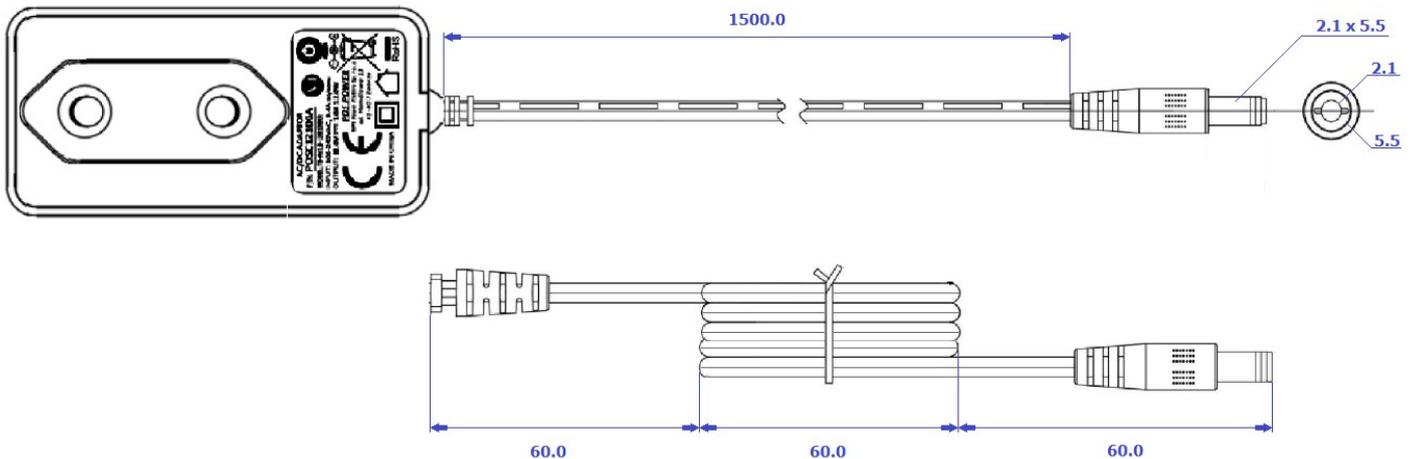

MODEL	DC PLUG	X [mm]	Y [mm]	Polarity
POSC09150A	5.5x2.1mm	5.5	2.1	center positive
POSC09150A-2555	5.5x2.5mm	5.5	2.5	center positive
POSC09150A -1335	3.5x1.3mm	3.5	1.3	center positive
POSC09150A -1740	4.0x1.7mm	4.0	1.7	center positive
POSC09150A -1748	4.8x1.7mm	4.8	1.7	center positive
POSC09150A -CN	5.5x2.1mm	5.5	2.1	center negative
POSC09150A -2555-CN	5.5x2.5mm	5.5	2.5	center negative
POSC09150A -1335-CN	3.5x1.3mm	3.5	1.3	center negative
POSC09150A -1740-CN	4.0x1.7mm	4.0	1.7	center negative
POSC09150A -1748-CN	4.8x1.7mm	4.8	1.7	center negative

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wall Mount AC Adapters](#) category:

Click to view products by [POS manufacturer](#):

Other Similar products are found below :

[ADP-163 E](#) [ADP-159 A](#) [WSU075-1000-R13](#) [WSU120-2000-R13](#) [WSU120-2000-13](#) [WSU090-2500-13](#) [WSU240-1000-13](#) [WSU150-0560-13](#)
[WSU240-0500-R13](#) [WSU050-3000-13](#) [WSU120-1500-13](#) [WSU150-1200-13](#) [WSU120-1500-R13](#) [WSU240-0750-13](#) [WSU240-1500-13](#)
[WSU090-1300-13](#) [WSU050-1500-13](#) [WSU090-0800-13](#) [WSU120-0700-13](#) [WSU120-3000-13](#) [WSU090-1300-R13](#) [WSU075-1000-13](#)
[WSU060-1250-13](#) [WSU050-4000-13](#) [AC PLUG-AU3](#) [AC PLUG-MIX3](#) [TRE-A](#) [223-00011](#) [223-00012](#) [223-00010](#) [BB-SMI6B12V-P230C1](#)
[FPBAG1-H](#) [POSC05200A-0723-WH](#) [POSC05200A-1335-WH](#) [POSC05200A-1740](#) [POSC05200A-CN-WH](#) [POSC12100A-0723](#)
[POSC12100A-1335-WH](#) [POSC12125A-WH](#) [POSC12200A-H-1335](#) [POS05200A-WH-USB-C](#) [POSC06100A-1335-WH](#) [POSC06100A-](#)
[1335L-WH](#) [POSC09100A-0723](#) [POSC09100A-1335](#) [POSC09100A-CNL](#) [POSC12125A-CN](#) [T5889ST](#) [BB-SMI6B-12-V-ST](#) [POSC24100A-](#)
[WH](#)