


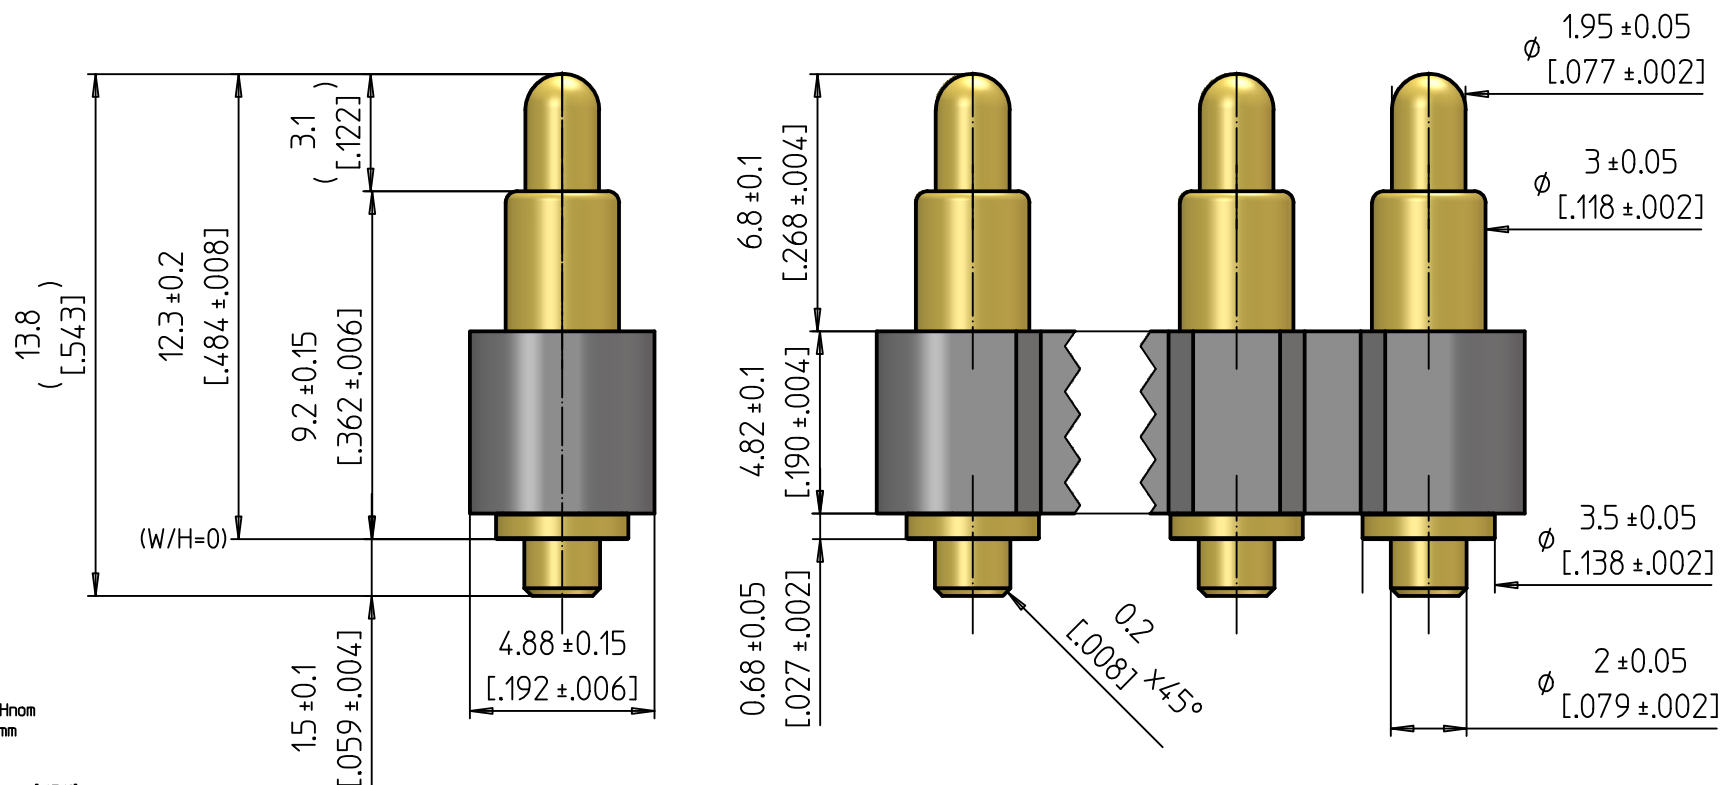

NOTES:

MECHANICAL REQUIREMENTS:

Durability: 20'000 cycles at Hnom

Theoretical stroke: S= 2.30 mm

Spring forces (F):

Finit= 2.1 N *

F1= 2.25 N at H1= 12.10 mm [0.476"]

Fnom= 2.88±0.65 N at Hnom= 11.30 mm [0.444"]

F2= 3.91 N at H2= 9.97 mm [0.392"]

Recommended working range: between H1 and H2

Forces are measured in mean value of compression / decompression

ELECTRICAL REQUIREMENTS:

Contact resistance:

R= 30 mOhms max in static mode at Hnom

Current per individual contact in free air at ambient temperature:

ICont= 12 A at Hnom with temperature raise max 30°C

ENVIRONMENTAL REQUIREMENTS:

Operating temperature: -40 °C / +125 °C

MATERIALS / PLATINGS:

Barrel : Brass / Flash Gold over Nickel

Piston : Brass / 0.40 µm [10µ"] Gold over Nickel

Clip : BeCu / 0.40 µm [10µ"] Gold over Nickel

Rod : Brass / 0.12 µm [10µ"] Gold over Nickel

Spring : Stainless steel

Insulator :

Available in single row from 2 to 7 ways.

For Ordering Number replace NNNN by the desired number of poles.

Series POWER-CLIP Spring Loaded Connector 12 Amps



precip-dip
swiss world connect



Remplace:

Remplacé par:

5:1

Dessiné

06.07.2023

C.Bidault

Contrôlé

N° dessin

Révision

8PM-27-NNNN-02-642

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Precidip](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#) [CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)