

## Piezoelectric Film Sensors

Pro-Wave now presents a series of mechno-electrical sensors and detectors produced by advanced piezoelectric polymer film technology. The polymer film of polyvinylidene fluoride (PVF2) exhibits a conspicuous piezoelectric effect and also has high compliance comparing with other piezoelectric crystals or ceramic materials. Because of its superior piezoelectric strain constant (g value), 10-20 times larger than piezoelectric ceramic, it is an ideal sensing material for converting mechanical to electrical energy.


Besides the standard products shown on this catalogue, we are also developing a series of sensing devices by using this particular piezoelectric thin film material. Please contact with us for your special needs.

### Features


- High Mechno-electrical coefficienty in planar, thickness and hydrostatic modes
- Low mechanical and acoustic impedance
- High resistance to moisture
- Pliant, flexible, tough and lightweight
- Self-generated voltage, non-contact, rustless, free of sparking

### Applications


- Vibration sensors and motion detectors
- Low weight accelerometers
- Pressure or force sensors
- Keyboards, keypads and touch panels
- Coin and impact sensors
- Microphones and headset speakers
- Other mechno-electrical and electro-mechanical devices

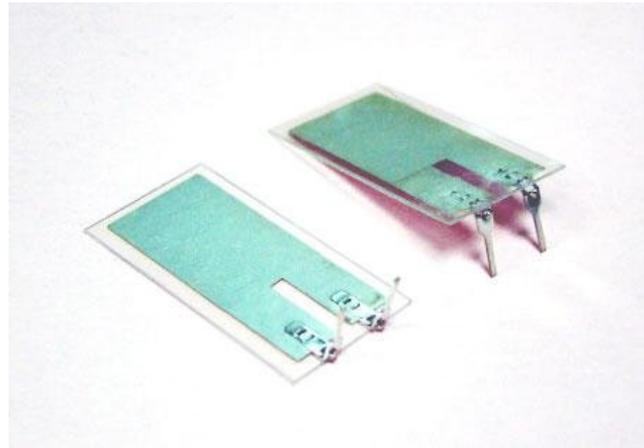

### Frequency response

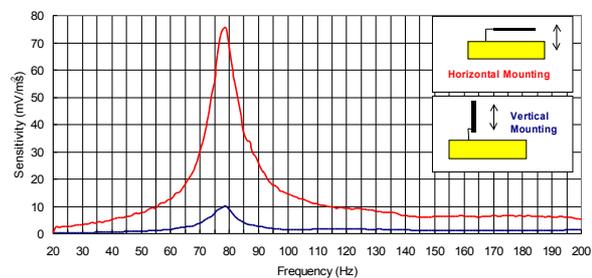

### Measuring diagram

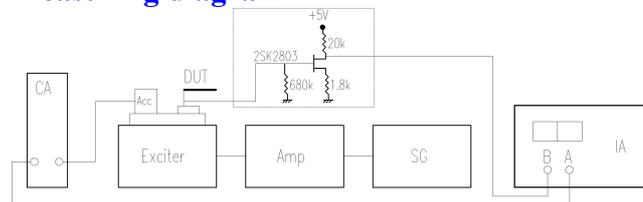

**SG:** Programmable Signal Source HP 8165A

**Amp:** Power Amplifier

**Exciter:** Exciter B&K 4809

**Acc:** Accelerometer B&K 8309

**DUT:** Device (FS-2513P) under test

**CA:** Charging Amplifier B&K 2635

**IA:** Impedance Analyzer HP4192



**S. Square Enterprise Company Limited**  
**Pro-Wave Electronics Corporation**


[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: [sales@pro-wave.com.tw](mailto:sales@pro-wave.com.tw) ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

# Piezoelectric Film Sensors

## Specifications


Model Number	FS-2513P	Unit
Type	Lead Pins	-
Voltage sensitivity at fr	70	$mV/ms^{-2}$
Transverse sensitivity	10	$mV/ms^{-2}$
Resonant frequency (fr)	80±10	Hz
Capacitance	660±30%	pF@1KHz
Operation voltage (Vcc)	-	DC volts
Operation current	-	mA
Max. output current	-	mA
Operation temperature	-20 - +60	°C
Storage temperature	-40 - +70	°C

## Dimensions in mm

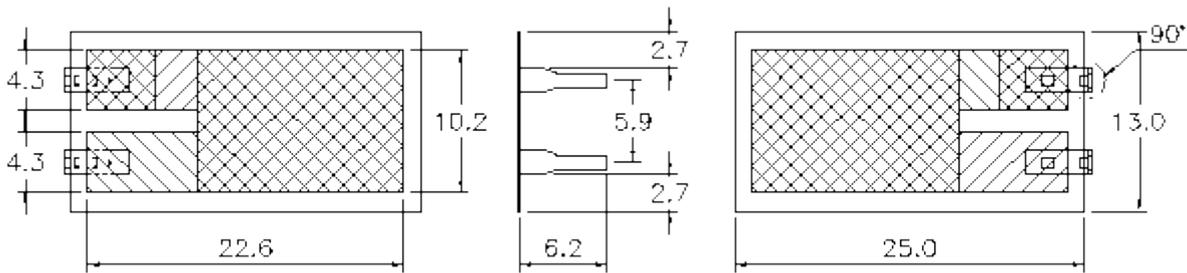

## Driving circuit & pin assignment of model FD-2513P

© All copyrights reserved 1994, 1998 Pro-Wave Electronics Corporation

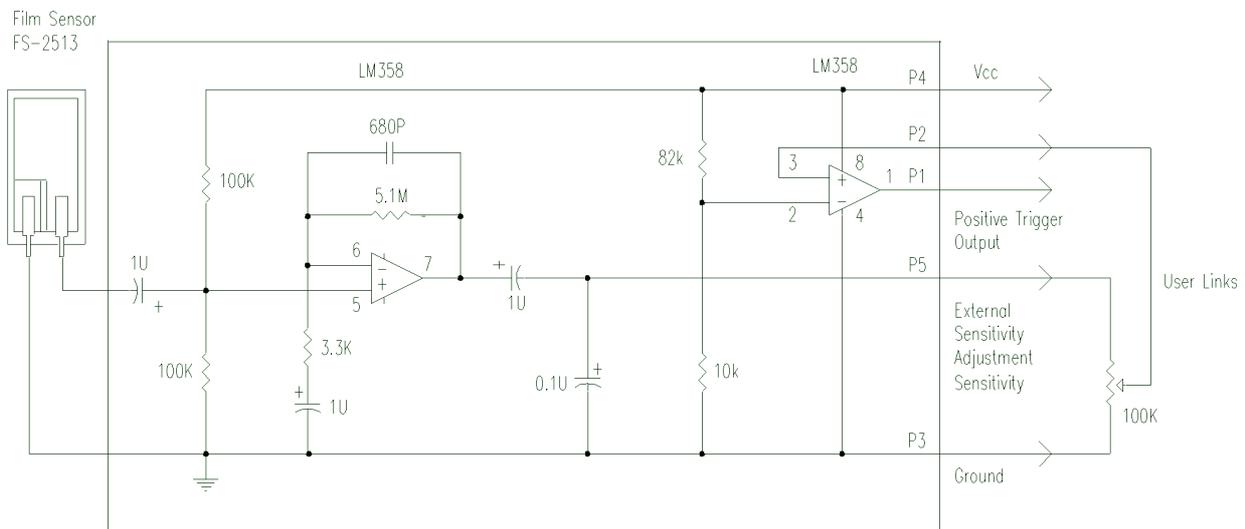

**S. Square Enterprise Company Limited**  
**Pro-Wave Electronics Corporation**

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: [sales@pro-wave.com.tw](mailto:sales@pro-wave.com.tw) ; Tel: 886-2-22465101 ; Fax: 886-2-22465105

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Proximity Sensors](#) category:*

*Click to view products by [Pro-Wave Electronics](#) manufacturer:*

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)  
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)  
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)  
[M1J-T-0.3M-N](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [IFRM04N35B1/L](#)  
[IFRM04P1513/S35L](#) [IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#) [IFRM12P37G1/S14L](#)  
[ILFK12E9189/I02](#) [ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#) [25.352.0753.0](#)